

## Photometric test report

**Family**  
Streetlight 21 mini easy LED

**Order number: 5XE6E43A08HB**  
**EAN: 4058352730591**

**LP number**  
**59077\_807**



**Version** post-top or side-entry mounting  
**Optic** asymmetric, wide distribution (STW1.0a)  
**Cover** toughened safety glass  
**Lamps** LED 4000 K | CRI ≥ 70  
**Controlgear** ECG DIM  
**Rated values** Net luminous flux = 9430 lm  
 Power consumption = 66.0 W  
 Luminous efficacy = 142.9 lm/W

**serial**  
**documentation**  
18.07.2022

**sitEco**

**Luminous intensity in cd/klm**


**C180-0**

**C210-30**

**C215-35**

**C270-90**

**Imax: 809 cd/klm**

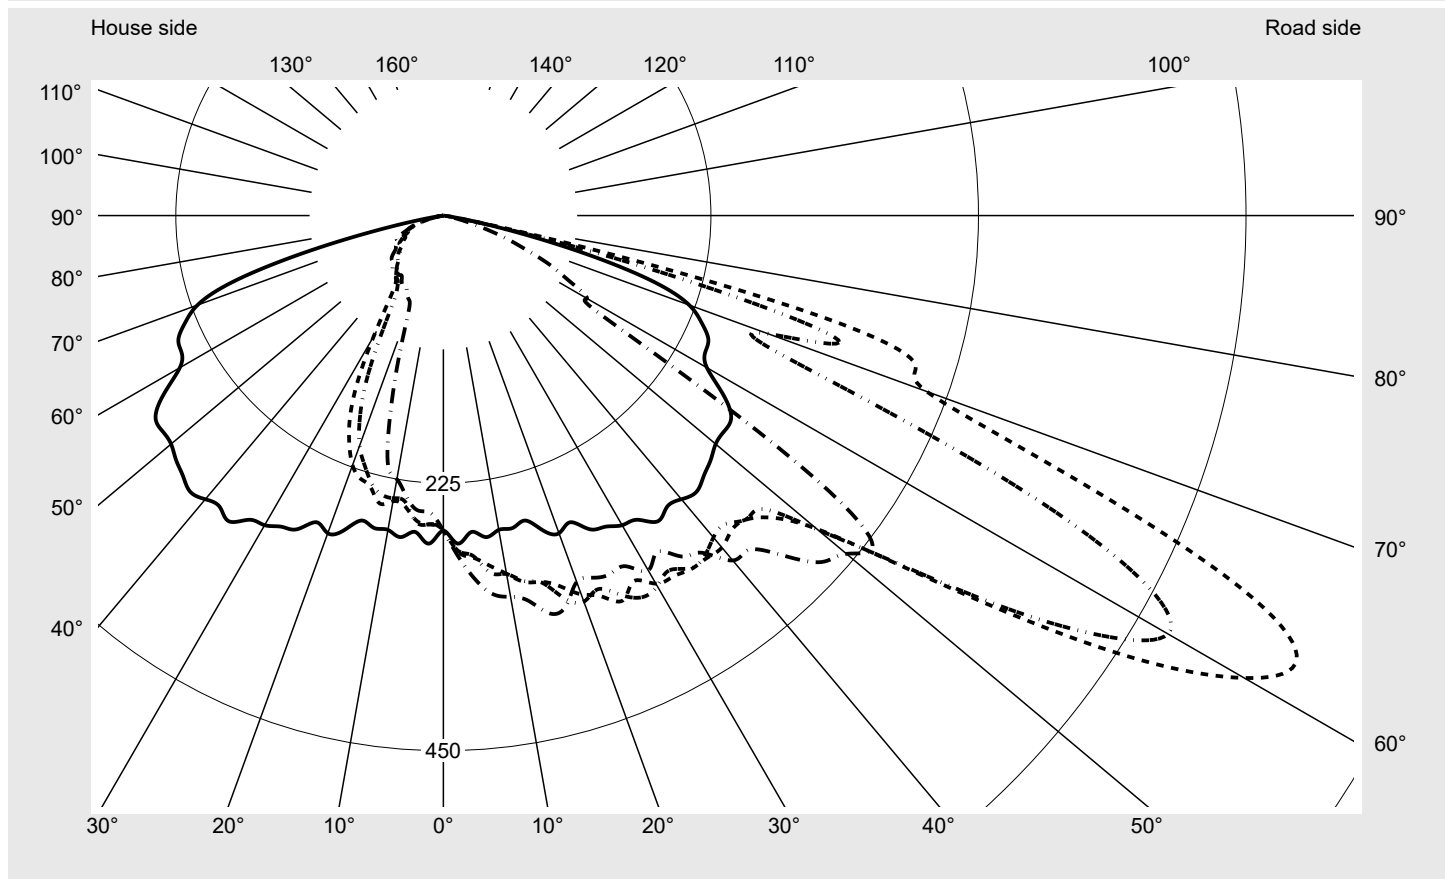

**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

**Luminous intensity class acc. to EN13201-2**

Class:	G4
Imax 70°	498.7
Imax 80°	32.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 21 mini easy LED	<b>Order number: 5XE6E43A08HB</b> <b>EAN: 4058352730591</b>	<b>LP number</b> <b>59077_807</b>
---	--	--------------------------------------

**Envelope curve in cd/klm**      **KMK 62.5°**    **KMK 60°**    **KMK 57.5°**    **KMK 55°**      **siteco**

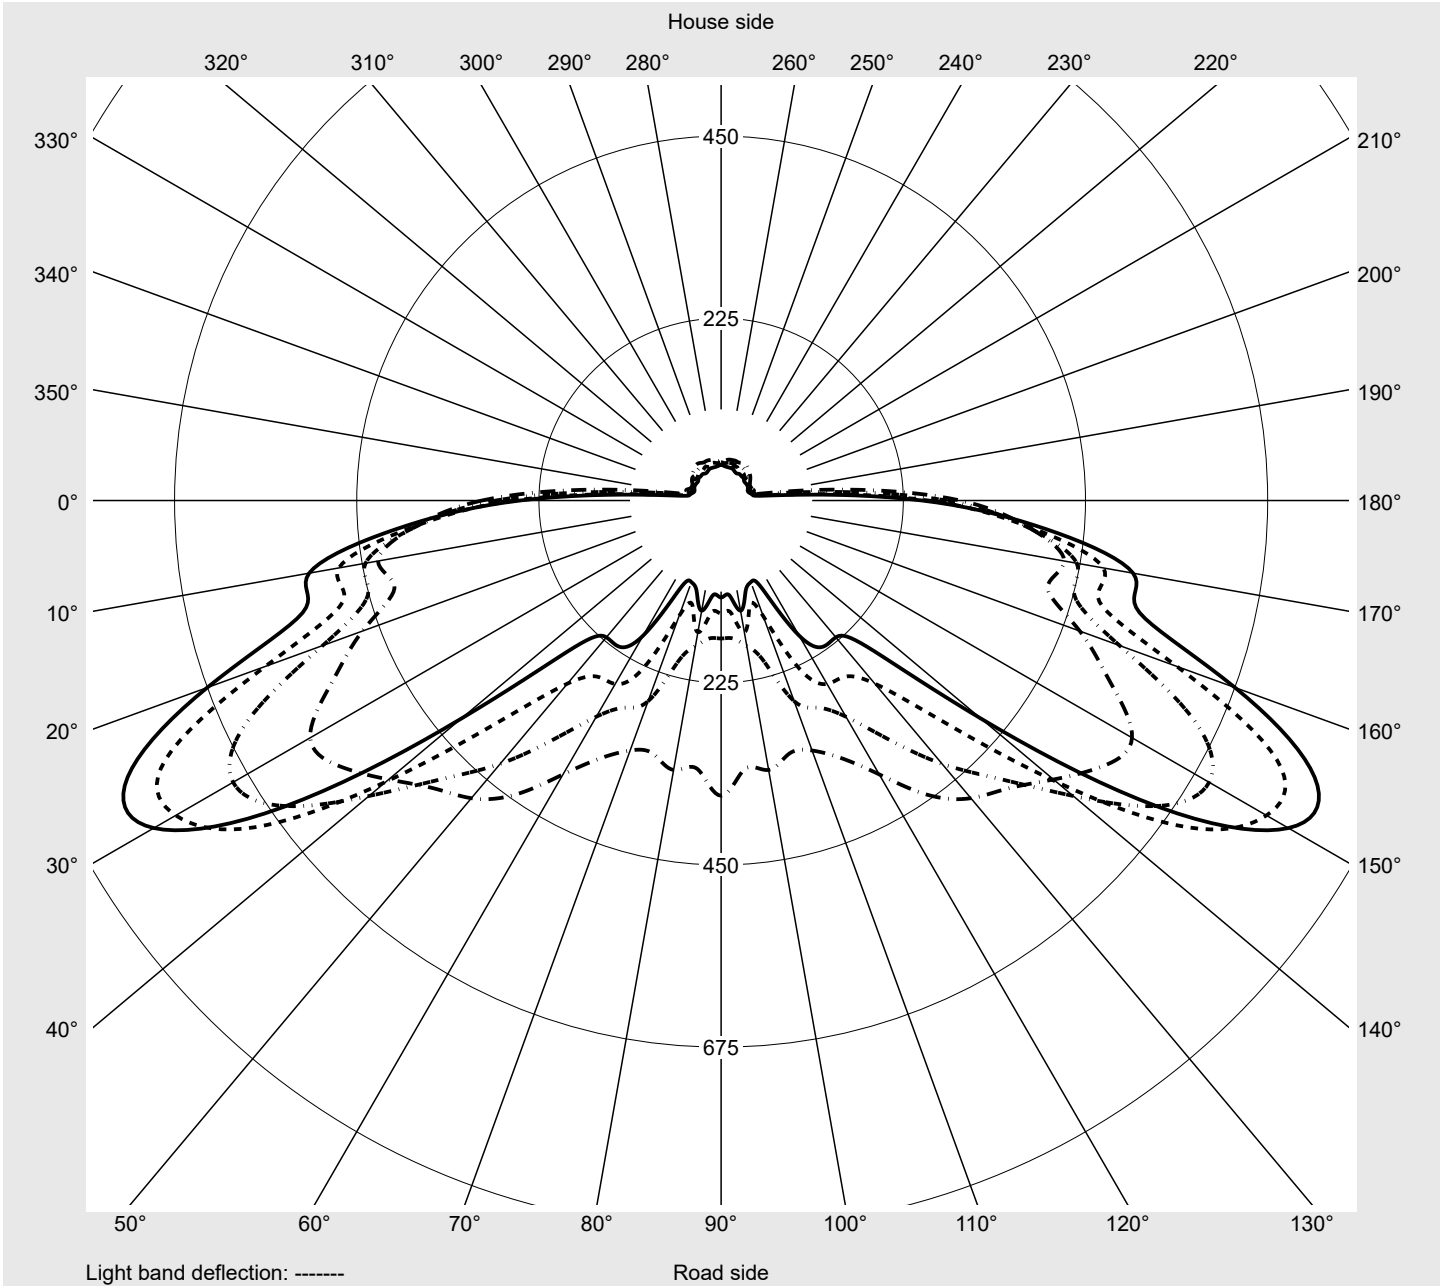

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini easy LED</b>	<b>Order number: 5XE6E43A08HB</b> <b>EAN: 4058352730591</b>	<b>LP number</b> <b>59077_807</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0
2,5°	276.1	278.2	279.9	280.7	282.6	280.9	282.9	282.1	283.9	285.0	286.7	288.0	286.1
5,0°	267.2	269.0	274.7	278.5	279.8	286.4	288.9	287.4	290.8	292.6	294.2	300.0	298.6
7,5°	272.7	275.9	280.1	284.4	288.5	292.4	296.9	303.0	303.7	307.0	310.0	310.1	313.3
10,0°	268.4	272.2	277.4	291.4	300.9	306.8	305.9	306.1	302.0	308.4	313.7	316.2	320.5
12,5°	269.1	273.9	287.4	294.7	304.6	314.3	315.6	314.8	322.9	327.5	331.4	330.3	330.5
15,0°	265.5	276.8	296.7	300.8	305.0	315.9	318.9	319.5	329.6	338.0	337.2	339.7	342.1
17,5°	277.4	287.6	299.4	305.4	315.7	326.6	326.9	337.2	336.9	335.5	339.7	341.4	338.5
20,0°	284.3	295.0	304.2	313.5	321.0	328.4	338.9	345.5	343.3	344.8	347.8	341.7	334.4
22,5°	279.1	294.0	312.1	323.0	327.7	341.0	346.5	340.0	341.6	352.4	351.9	343.1	331.1
25,0°	291.0	303.1	317.1	327.0	339.5	348.9	357.1	351.7	350.1	347.4	339.5	333.6	333.4
27,5°	295.0	309.9	321.7	338.0	351.4	356.8	346.6	361.8	356.7	344.1	331.2	337.6	339.9
30,0°	300.7	317.1	328.5	349.8	355.9	355.9	357.4	359.7	352.9	344.8	333.1	337.4	338.9
32,5°	303.3	318.9	336.3	353.9	359.5	349.5	359.8	353.7	348.0	346.4	340.3	346.7	346.0
35,0°	314.0	326.8	340.1	355.5	360.5	357.7	363.1	362.1	346.9	343.3	345.1	341.2	346.2
37,5°	308.9	327.9	347.5	353.8	357.0	355.0	363.3	360.9	349.1	347.9	346.4	345.8	346.0
40,0°	311.4	332.1	344.0	358.4	357.1	363.3	364.4	353.3	357.7	355.2	353.1	353.4	356.3
42,5°	315.1	342.3	354.5	357.4	364.8	358.6	358.8	351.6	354.4	362.5	363.5	361.8	376.7
45,0°	309.7	352.0	364.3	364.3	367.8	375.0	361.3	360.8	367.0	373.0	384.1	397.1	402.7
47,5°	304.8	361.9	365.7	366.2	379.0	381.6	376.2	365.3	379.3	404.4	419.2	437.2	429.1
50,0°	298.9	376.3	386.3	389.3	397.8	415.1	409.9	410.7	417.6	449.6	467.2	465.5	448.8
52,5°	297.8	384.5	408.5	405.9	426.8	460.3	481.7	479.2	484.8	487.2	491.5	476.7	441.4
55,0°	295.5	381.4	430.2	417.6	471.4	530.1	586.0	573.2	535.9	502.5	479.9	443.5	390.5
57,5°	278.4	380.3	445.9	451.7	523.6	645.7	695.9	657.7	567.6	486.1	424.4	359.9	308.3
60,0°	255.9	384.0	479.3	483.8	599.0	757.2	777.7	703.6	540.3	384.0	295.1	265.7	261.6
62,5°	248.4	402.0	516.6	535.0	675.3	808.8	809.0	659.9	419.1	256.1	220.5	220.2	192.6
65,0°	245.9	422.0	553.6	573.4	711.3	776.7	738.3	510.2	243.5	208.7	192.4	191.3	104.6
67,5°	235.0	425.3	575.2	564.4	621.8	656.3	565.5	314.5	192.3	176.6	153.1	147.2	65.3
70,0°	220.0	417.0	498.7	490.7	467.4	475.7	432.4	290.7	186.4	147.5	119.0	82.6	48.3
72,5°	186.1	339.1	400.0	304.5	275.2	335.3	416.1	348.4	176.7	109.9	75.5	56.3	39.4
75,0°	123.0	169.2	172.4	105.2	89.8	211.1	330.5	216.4	77.4	39.2	49.9	41.1	30.5
77,5°	56.5	71.0	62.1	33.2	30.7	82.6	105.1	73.0	43.5	25.3	37.7	26.1	20.2
80,0°	17.1	18.7	17.1	12.0	10.0	32.8	16.7	12.3	11.9	13.6	24.3	14.2	12.9
82,5°	2.8	2.6	2.8	2.7	4.2	12.7	4.3	4.9	3.6	2.7	7.1	7.5	9.0
85,0°	0.6	1.0	0.8	0.7	0.9	0.6	1.1	1.6	1.2	1.0	1.0	1.0	0.9
87,5°	0.2	0.1	0.2	0.1	0.2	0.2	0.1	0.1	0.1	0.1	0.0	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini easy LED</b>	<b>Order number: 5XE6E43A08HB</b> <b>EAN: 4058352730591</b>	<b>LP number</b> <b>59077_807</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0
2,5°	287.5	287.6	287.1	287.4	287.0	287.0	273.3	268.1	264.9	264.2	262.9	260.1	259.7
5,0°	298.8	299.6	303.6	304.8	306.2	307.1	263.9	264.0	263.7	260.2	262.6	257.7	259.0
7,5°	311.1	312.7	314.2	315.4	319.9	321.2	264.6	260.9	257.4	253.9	248.6	246.6	243.3
10,0°	322.2	321.1	324.7	324.1	330.8	325.5	261.4	256.1	251.1	248.3	244.7	244.0	241.3
12,5°	332.1	335.3	335.1	332.5	329.2	332.0	262.3	260.1	252.5	246.3	242.6	247.9	240.3
15,0°	337.6	337.3	338.6	345.5	346.4	346.4	261.0	256.5	253.2	248.3	245.2	236.4	233.1
17,5°	341.6	341.9	341.5	339.9	341.6	343.8	270.2	262.3	253.8	247.9	241.6	232.0	220.2
20,0°	335.0	333.0	331.7	327.6	328.6	327.9	267.8	260.8	255.7	239.3	232.0	223.3	206.1
22,5°	329.0	328.2	327.2	332.2	325.7	329.6	271.4	267.7	246.7	240.9	224.1	206.9	183.3
25,0°	334.2	338.9	333.4	328.8	331.6	332.3	273.9	267.1	247.9	230.6	210.1	185.4	153.1
27,5°	345.0	340.9	338.0	336.9	330.6	332.5	281.1	265.5	244.5	212.3	189.3	154.5	114.5
30,0°	347.4	348.6	347.5	338.6	338.7	344.5	287.4	263.9	231.2	198.3	160.4	116.8	84.4
32,5°	348.4	347.2	343.8	343.5	341.8	335.2	290.9	256.1	220.6	179.3	126.7	86.3	72.1
35,0°	347.0	345.2	346.6	347.5	342.5	350.1	287.0	243.6	204.1	146.9	96.2	70.3	66.8
37,5°	350.1	351.8	356.0	359.3	353.9	357.4	278.7	226.5	179.7	108.7	69.8	65.7	65.1
40,0°	361.0	366.3	369.3	373.6	367.6	378.6	271.5	211.0	146.0	80.9	62.4	61.5	61.5
42,5°	385.5	380.9	382.4	379.9	385.9	381.1	253.2	192.1	110.3	60.5	58.0	57.7	57.7
45,0°	410.8	397.6	391.9	399.7	411.0	404.2	243.1	159.0	76.9	55.3	55.2	53.6	54.0
47,5°	433.6	414.0	411.4	415.7	420.3	431.3	227.6	126.7	55.1	50.4	51.7	51.7	52.1
50,0°	445.6	425.7	419.8	449.5	443.7	442.5	210.7	88.3	49.0	47.6	47.1	49.3	47.6
52,5°	416.0	395.0	398.9	443.8	448.1	454.9	180.9	59.1	45.7	45.0	43.8	45.3	45.8
55,0°	351.0	328.5	323.8	337.9	333.0	364.6	154.6	48.8	43.8	42.1	39.9	41.0	43.9
57,5°	282.3	263.7	206.2	182.5	171.1	170.4	121.8	44.9	41.6	41.3	39.9	40.0	43.9
60,0°	229.7	151.7	135.7	165.2	139.3	139.5	86.6	41.6	37.8	38.2	38.7	36.9	40.7
62,5°	120.0	107.2	116.5	138.1	117.6	119.8	77.0	39.6	36.3	35.0	36.5	37.2	37.1
65,0°	83.4	91.6	95.7	104.6	97.6	100.3	69.3	36.7	32.8	31.9	34.4	37.0	32.8
67,5°	67.6	73.1	74.5	77.1	78.6	76.2	54.0	28.7	29.8	27.7	32.7	34.8	32.1
70,0°	52.0	55.8	56.0	55.7	56.2	56.3	41.4	23.6	24.9	23.4	27.3	28.8	27.1
72,5°	39.0	39.0	37.7	39.2	37.6	36.6	39.4	19.2	19.3	19.8	21.9	22.2	21.5
75,0°	24.8	24.3	23.5	23.2	21.8	20.8	33.9	14.3	14.8	15.1	17.1	14.6	15.3
77,5°	14.2	13.2	12.7	11.4	11.4	9.5	22.2	10.4	8.7	9.2	11.9	11.0	10.9
80,0°	7.8	5.8	5.4	4.1	4.0	2.8	9.0	5.5	5.3	4.7	5.5	5.6	6.8
82,5°	3.8	1.6	1.4	1.0	1.4	0.9	2.5	2.3	2.2	2.3	2.5	2.8	3.4
85,0°	0.6	0.4	0.3	0.3	0.3	0.4	0.8	0.7	0.8	0.8	0.7	0.9	1.0
87,5°	0.1	0.1	0.1	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 mini easy LED</b>	<b>Order number: 5XE6E43A08HB</b> <b>EAN: 4058352730591</b>	<b>LP number</b> <b>59077_807</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	265.0	0.4	0.4
2,5°	256.9	256.0	255.6	256.1	254.6	252.5	250.9	249.4	248.9	249.4	250.4	3.2	3.6
5,0°	255.7	253.9	254.1	252.3	249.0	249.7	248.6	248.0	246.8	248.4	248.8	6.5	10.2
7,5°	240.3	241.6	243.4	240.7	241.4	239.6	241.1	240.8	239.1	237.5	238.3	9.8	20.0
10,0°	240.0	236.3	237.0	232.8	230.3	226.3	227.2	227.7	229.3	228.1	225.1	13.0	33.0
12,5°	232.1	228.4	226.2	223.2	220.3	215.5	208.4	206.4	206.3	212.3	215.0	16.3	49.3
15,0°	228.7	218.0	206.6	202.2	200.2	193.2	184.1	176.9	174.8	172.2	172.4	19.2	68.5
17,5°	209.4	198.3	189.0	174.2	161.0	148.0	139.2	129.3	122.8	121.0	123.7	21.6	90.1
20,0°	192.2	169.1	150.1	131.9	115.1	104.2	97.2	89.9	88.2	86.4	85.0	23.5	113.6
22,5°	156.5	129.9	107.3	94.2	82.7	77.8	78.4	76.9	75.2	76.8	76.1	25.4	139.0
25,0°	117.5	93.4	80.0	74.6	74.6	73.9	73.1	74.0	72.0	74.0	72.3	27.6	166.6
27,5°	87.2	75.8	71.2	72.6	73.4	71.9	71.0	71.6	70.4	71.1	67.8	29.8	196.4
30,0°	73.6	70.2	72.9	71.5	70.4	71.0	69.8	70.1	68.1	67.3	68.0	32.0	228.4
32,5°	67.8	68.1	67.7	70.5	70.7	68.2	67.0	65.7	64.1	63.6	65.2	33.9	262.4
35,0°	66.4	67.3	66.7	66.1	65.8	64.8	64.9	64.1	64.6	62.1	61.4	35.8	298.2
37,5°	67.0	67.1	66.4	64.8	64.1	62.0	62.1	63.5	62.3	64.1	62.6	37.7	335.9
40,0°	65.2	69.2	62.8	60.8	59.4	59.4	62.3	62.4	60.3	60.0	60.4	39.8	375.7
42,5°	64.4	66.3	68.6	56.9	57.5	58.5	59.4	60.7	57.9	58.0	62.3	42.0	417.7
45,0°	61.0	62.0	77.2	58.2	58.6	59.2	60.0	59.8	60.6	60.1	60.3	44.9	462.5
47,5°	53.1	53.8	65.9	58.5	59.2	58.8	59.9	60.0	59.8	59.0	57.8	47.8	510.3
50,0°	49.0	52.4	58.1	59.5	60.2	57.5	58.4	56.2	56.5	55.8	56.8	51.7	562.1
52,5°	47.6	51.8	55.7	54.3	55.8	54.5	53.9	54.8	53.8	53.5	53.4	54.9	616.9
55,0°	47.0	49.2	51.3	53.6	53.4	51.8	52.2	51.8	51.3	49.3	48.8	55.2	672.1
57,5°	45.4	44.7	46.5	47.9	48.4	48.5	47.8	47.7	47.4	46.4	47.2	53.2	725.3
60,0°	41.2	41.2	43.3	43.3	43.7	45.9	44.1	44.4	44.6	44.1	43.7	51.8	777.1
62,5°	37.1	39.0	39.1	39.8	38.6	39.5	41.5	41.8	42.1	42.8	44.1	49.6	826.7
65,0°	33.4	34.7	37.0	36.8	35.8	36.8	38.8	37.6	40.4	42.1	41.9	46.0	872.7
67,5°	29.7	31.0	32.3	32.5	32.0	32.6	33.8	36.5	37.1	35.6	34.6	40.0	912.8
70,0°	25.9	28.0	28.5	28.5	28.1	28.2	29.6	31.2	31.7	30.2	29.9	33.5	946.3
72,5°	21.7	23.7	24.6	25.3	25.5	26.0	25.4	26.6	27.1	26.8	25.0	26.9	973.2
75,0°	17.0	18.4	21.4	20.6	20.1	20.9	20.3	21.1	22.0	20.0	20.2	15.6	988.8
77,5°	12.3	14.7	16.6	16.7	16.2	16.3	15.3	12.3	9.2	7.0	6.0	7.1	995.9
80,0°	7.5	8.6	11.2	12.9	13.0	11.5	9.3	6.4	3.8	1.9	1.2	2.8	998.7
82,5°	3.8	4.4	5.7	8.4	8.1	7.0	4.2	2.7	1.4	0.5	0.4	1.1	999.7
85,0°	1.4	1.4	1.6	1.6	1.8	1.5	0.8	0.5	0.4	0.1	0.1	0.2	1000.0
87,5°	0.2	0.2	0.2	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 21 mini easy LED	<b>Order number: 5XE6E43A08HB</b> <b>EAN: 4058352730591</b>	<b>LP number</b> <b>59077_807</b>
---	--	--------------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Output ECG [%]	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	100	9430	66.0	68.9	67.4
95	94	8982	61.9	64.7	63.3
90	88	8513	57.9	60.5	59.2
85	82	8028	53.9	56.4	55.2
80	76	7535	50.0	52.2	51.1
75	71	7108	46.7	48.8	47.8
70	65	6587	42.9	44.7	43.8
65	60	6143	39.7	41.3	40.5
60	55	5691	36.4	37.9	37.2
55	50	5228	33.3	34.7	34.0
50	45	4755	30.1	31.3	30.7
45	40	4274	27.0	28.0	27.5
40	35	3781	23.9	24.8	24.4
35	30	3276	20.7	21.6	21.2
30	26	2865	18.3	18.9	18.6
25	21	2344	15.1	15.7	15.4
20	17	1919	12.7	13.2	13.0
15	12	1378	9.7	10.0	9.8
13	11	1269	9.1	9.4	9.2

<b>Dimming levels table</b>	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Output ECG [%]	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	100	9680	66.8	69.7	68.2
95	94	9206	62.7	65.5	64.1
90	88	8716	58.7	61.2	60.0
85	82	8210	54.6	57.1	55.8
80	77	7781	51.3	53.6	52.4
75	71	7253	47.3	49.4	48.3
70	66	6806	44.1	46.0	45.0
65	60	6258	40.2	41.9	41.0
60	55	5793	36.9	38.5	37.7
55	50	5316	33.8	35.2	34.5
50	45	4832	30.5	31.8	31.2
45	40	4339	27.4	28.4	27.9
40	35	3836	24.2	25.1	24.6
35	31	3425	21.7	22.5	22.1
30	26	2903	18.5	19.2	18.8
25	21	2373	15.4	16.0	15.7
20	17	1942	12.9	13.4	13.2
16	13	1505	10.4	10.8	10.6
13	11	1283	9.2	9.5	9.4

## Photometric test report

<b>Family</b> Streetlight 21 mini easy LED	<b>Order number: 5XE6E43A08HB</b> <b>EAN: 4058352730591</b>	<b>LP number</b> <b>59077_807</b>
---	--	--------------------------------------

<b>Dimming levels table</b>	environmental temperature: 15°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Output ECG [%]	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	100	9560	66.4	69.3	67.8
95	94	9098	62.3	65.1	63.7
90	88	8619	58.3	60.9	59.6
85	82	8123	54.3	56.7	55.5
80	76	7618	50.4	52.5	51.4
75	71	7183	47.0	49.1	48.0
70	65	6654	43.1	45.0	44.0
65	60	6203	39.9	41.6	40.8
60	55	5744	36.7	38.2	37.4
55	50	5274	33.5	34.9	34.2
50	45	4795	30.3	31.5	30.9
45	40	4308	27.2	28.2	27.7
40	35	3809	24.0	24.9	24.4
35	30	3299	20.8	21.7	21.2
30	26	2885	18.4	19.1	18.8
25	21	2359	15.3	15.8	15.6
20	17	1931	12.8	13.3	13.0
15	12	1387	9.7	10.0	9.8
13	11	1277	9.1	9.5	9.3

**Photometric test report**

<b>Family</b> Streetlight 21 mini easy LED	<b>Order number: 5XE6E43A08HB</b> <b>EAN: 4058352730591</b>	<b>LP number</b> <b>59077_807</b>
---	--	--------------------------------------

**Luminousfluxs table** **siteco**

Temperature °C	Luminous flux lm	Power consumption W
25.0	9430.0	66.0
5.0	9680.0	66.8
15.0	9560.0	66.4