

Photometric test report

Family
Silica® 21

Order number: 51MX33TBT9W
EAN: 4058352685679

LP number
59332_39



Version Suspended luminaire, with homogeneous illumination, prismatic cover, direct-/ indirect distribution, extremely wide distribution, UGR≤16 (L65≤3000cd/m²), tunable white

Lamps LED 4000 K | CRI ≥ 80

Controlgear ECG-DALI


Setting factory setting

Rated values Net luminous flux = 7170 lm
Power consumption = 70.8 W
Luminous efficacy = 101.3 lm/W

serial documentation
03.05.2023



Luminous intensity in cd/klm C180-0 C270-90 **Imax: 358 cd/klm**

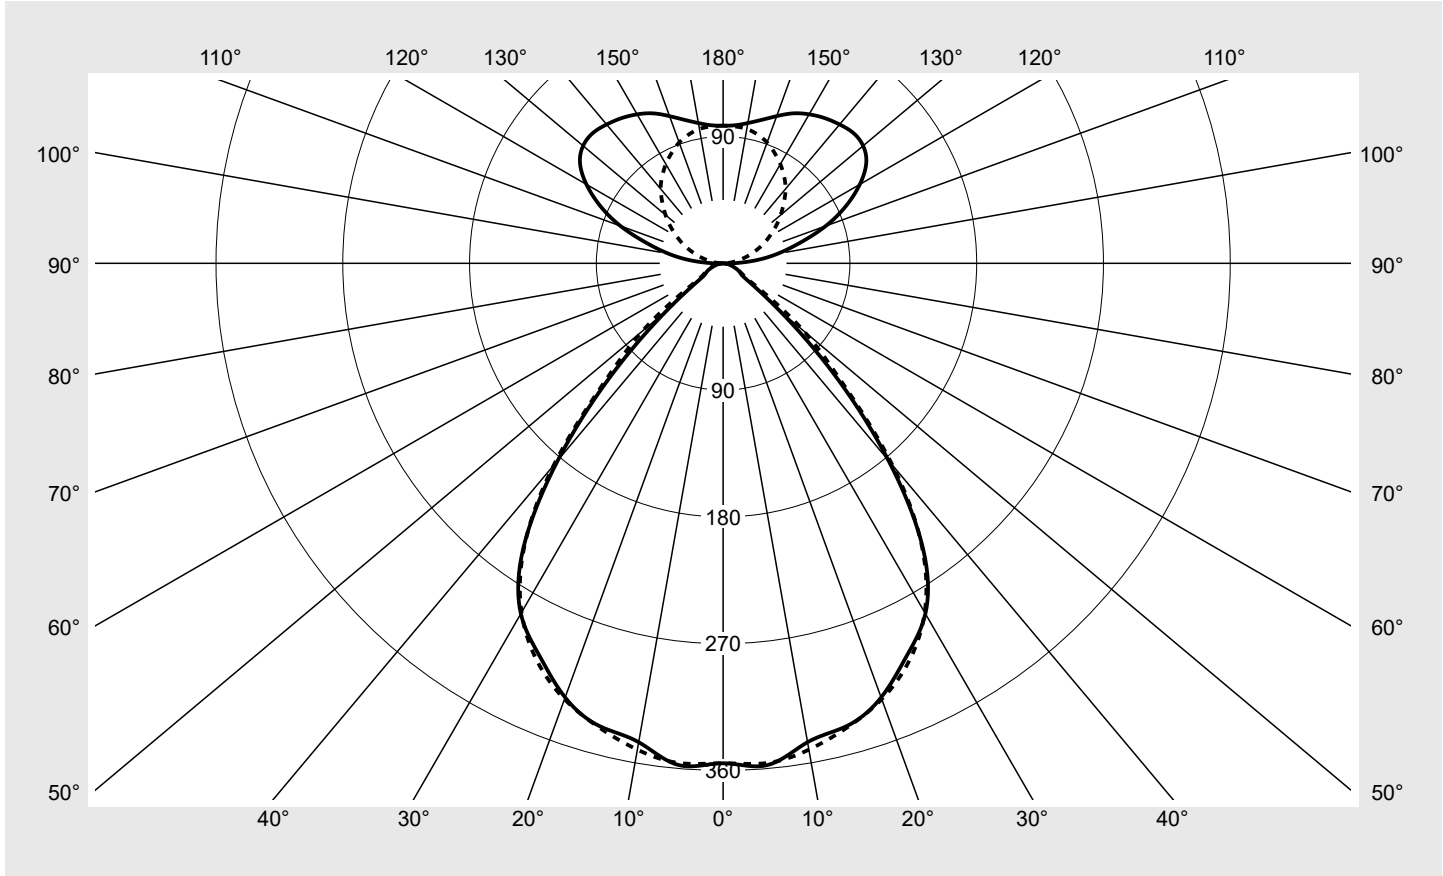

Classifications

DIN 5040	C 6 2
CIE	N1=78 N2=96 N3=99 N4=56 N5=100

Luminaire light output ratios

η_{LB}	100.0%
ϕ_u	56.2%
ϕ_o	43.8%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX33TBT9W EAN: 4058352685679	LP number 59332_39
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	354.9	354.9	354.9	354.9	354.9	354.9	354.9	2.1	2.1
5°	357.6	358.3	358.1	358.3	357.8	357.0	356.1	17.1	19.2
10°	345.2	344.3	344.5	346.4	350.1	350.3	350.6	33.1	52.3
15°	340.0	338.8	336.2	336.1	338.1	341.2	341.0	48.0	100.3
20°	328.0	327.2	323.2	324.1	322.5	324.8	329.3	60.9	161.2
25°	307.9	308.7	306.4	306.5	306.8	306.6	312.0	71.2	232.5
30°	287.2	287.0	283.4	284.9	285.2	284.2	286.2	78.2	310.6
35°	247.5	247.0	244.6	246.0	246.7	245.6	246.4	77.4	388.0
40°	182.5	182.1	183.5	184.7	186.1	185.9	187.0	65.0	453.0
45°	111.7	111.4	112.8	114.1	115.4	116.9	119.1	44.3	497.3
50°	52.4	60.7	68.3	62.5	56.3	66.9	74.7	26.5	523.8
55°	21.3	28.6	27.1	30.9	23.3	32.2	30.0	12.6	536.4
60°	14.3	14.9	15.7	14.6	14.6	15.6	16.3	7.2	543.6
65°	11.8	11.7	12.2	11.9	12.4	12.3	12.4	6.0	549.6
70°	8.5	8.7	9.0	9.0	9.2	9.3	9.8	4.7	554.2
75°	5.9	6.2	6.8	6.5	6.6	7.0	7.1	3.5	557.7
80°	3.6	3.8	4.2	4.6	4.2	4.7	4.8	2.3	560.0
85°	1.8	1.8	1.8	2.1	2.2	2.6	2.7	1.2	561.2
90°	6.2	6.0	6.3	6.0	3.5	1.2	0.4	2.4	563.6
95°	22.4	22.9	24.7	23.8	15.7	8.2	4.2	9.9	573.5
100°	39.4	40.6	41.5	37.2	25.7	14.7	9.7	16.6	590.1
105°	56.7	58.1	58.0	51.0	35.4	22.2	16.2	23.0	613.1
110°	77.6	78.3	74.6	63.1	45.4	29.8	23.1	29.3	642.4
115°	96.2	95.7	89.3	74.3	55.1	37.6	30.6	34.4	676.8
120°	112.0	110.6	101.9	83.7	64.3	45.2	37.9	38.0	714.8
125°	124.0	121.0	110.5	92.7	72.3	52.4	45.6	39.9	754.8
130°	129.8	127.1	115.2	98.2	78.4	59.6	53.3	39.9	794.7
135°	130.8	128.1	117.0	101.7	82.9	66.3	61.0	38.2	832.9
140°	128.7	126.6	117.2	103.9	86.2	72.4	69.0	35.5	868.4
145°	125.8	124.5	116.6	104.5	89.3	78.0	75.4	32.1	900.6
150°	122.1	121.5	114.3	103.4	91.6	83.4	81.3	28.1	928.7
155°	117.5	116.9	110.1	102.0	93.3	88.1	86.5	23.6	952.4
160°	111.2	110.8	105.7	100.5	94.8	91.7	91.2	18.9	971.3
165°	105.4	104.8	102.1	98.7	96.3	94.6	94.6	14.1	985.4
170°	101.1	100.5	99.8	98.3	97.2	96.9	96.9	9.4	994.7
175°	98.4	98.3	97.7	97.5	97.5	97.5	97.5	4.7	999.4
180°	97.7	97.7	97.7	97.7	97.7	97.7	97.7	0.6	1000.0

Photometric test report

Family Silica® 21	Order number: 51MX33TBT9W EAN: 4058352685679	LP number 59332_39
-----------------------------	---	------------------------------

UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	15.4	16.3	16.3	17.2	18.3	15.6	16.5	16.5	17.4	18.5
	3H	15.3	16.1	16.2	17.0	18.1	15.6	16.4	16.5	17.3	18.4
	4H	15.3	16.0	16.2	16.9	18.1	15.6	16.3	16.5	17.2	18.4
	6H	15.2	15.8	16.1	16.8	17.9	15.6	16.2	16.5	17.1	18.3
	8H	15.1	15.7	16.1	16.7	17.9	15.5	16.0	16.4	17.0	18.2
	12H	15.0	15.6	16.0	16.5	17.8	15.5	16.0	16.4	17.0	18.2
4H	2H	15.2	15.9	16.1	16.8	17.9	15.3	16.0	16.2	16.9	18.1
	3H	15.2	15.8	16.1	16.7	17.9	15.4	16.0	16.3	16.9	18.1
	4H	15.2	15.7	16.1	16.7	17.9	15.4	16.0	16.4	16.9	18.1
	6H	15.2	15.6	16.1	16.6	17.8	15.5	15.9	16.5	16.9	18.1
	8H	15.1	15.5	16.1	16.5	17.8	15.5	15.9	16.5	16.9	18.1
	12H	15.1	15.4	16.0	16.4	17.7	15.5	15.9	16.5	16.8	18.1
8H	4H	15.1	15.5	16.0	16.4	17.7	15.3	15.7	16.2	16.6	17.9
	6H	15.1	15.5	16.1	16.5	17.7	15.4	15.7	16.4	16.7	18.0
	8H	15.1	15.4	16.1	16.4	17.7	15.5	15.8	16.5	16.8	18.1
	12H	15.1	15.3	16.1	16.3	17.6	15.6	15.8	16.6	16.8	18.1
12H	4H	15.0	15.3	16.0	16.3	17.6	15.2	15.5	16.2	16.5	17.8
	6H	15.1	15.3	16.1	16.3	17.6	15.3	15.6	16.4	16.6	17.9
	8H	15.1	15.3	16.1	16.3	17.6	15.4	15.7	16.5	16.7	18.0

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1500 B = 50	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m ²						
45°	15096.2	15063.4	15252.6	15432.3	15599.4	15798.5	16107.6
50°	7796.1	9031.8	10157.0	9295.6	8377.2	9949.3	11106.9
55°	3544.6	4774.7	4510.2	5152.5	3891.5	5373.6	4994.7
60°	2743.3	2847.0	3009.3	2789.4	2799.7	2977.6	3112.2
65°	2665.2	2644.4	2750.2	2683.1	2796.8	2792.5	2813.1
70°	2384.3	2429.0	2527.4	2527.1	2567.1	2596.4	2730.3
75°	2189.3	2272.4	2504.0	2391.3	2446.7	2571.6	2633.6
80°	1977.5	2094.8	2310.6	2514.9	2332.6	2602.4	2664.6
85°	1922.8	1949.2	2026.0	2345.1	2462.5	2817.9	2937.5

Photometric test report

Family
Silica® 21

Order number: 51MX33TBT9W
EAN: 4058352685679

LP number
59332_39

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

