
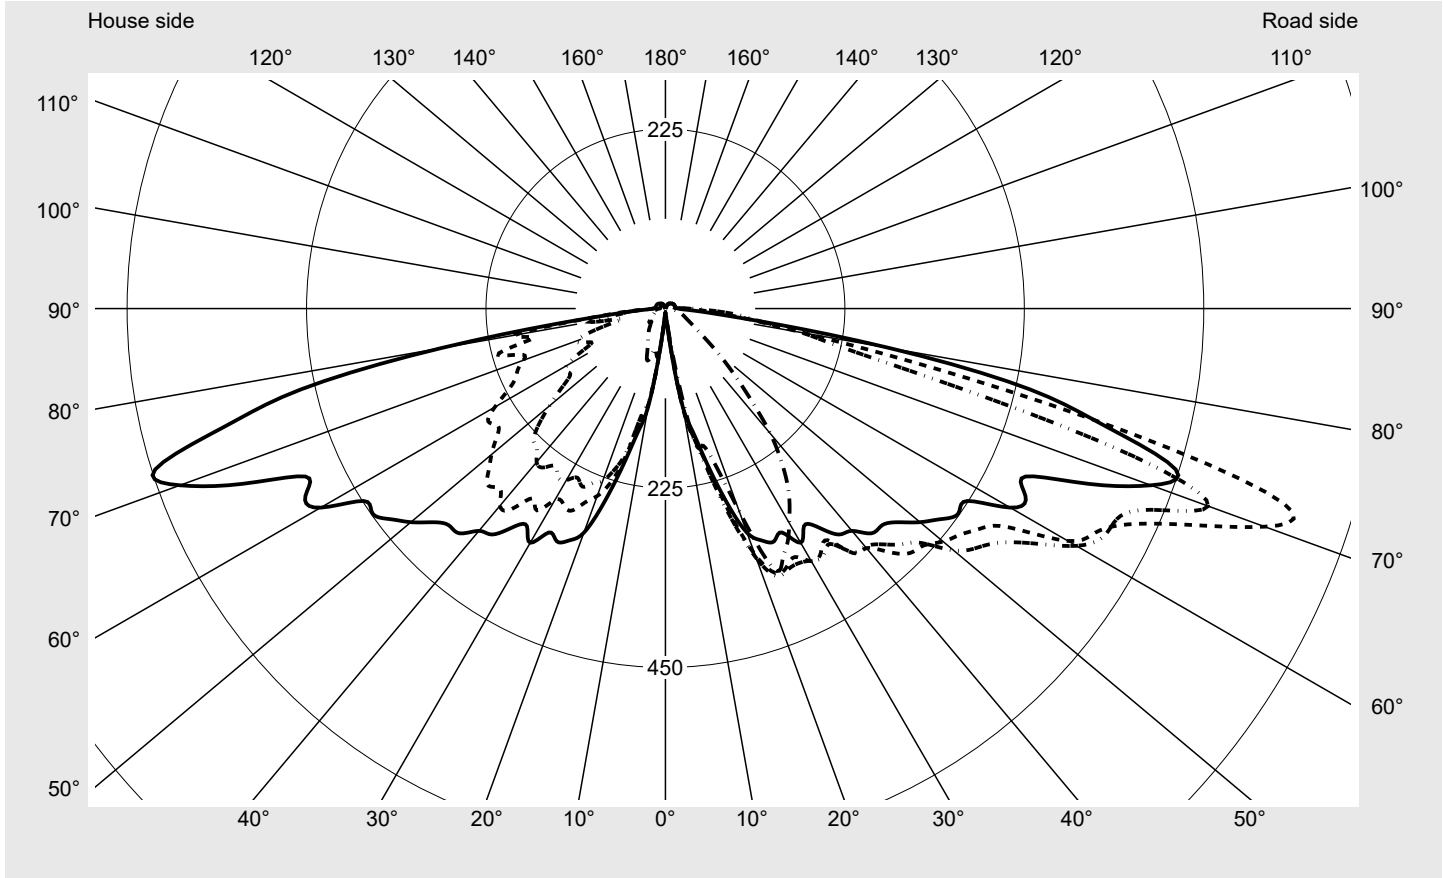


# Photometric test report

<b>Family</b> <b>DL 11 iQ</b>	<b>Order number: 5XA5565MF14HP00022</b> <b>EAN: 4058352956236</b>	<b>LP number</b> <b>59429_126</b>
	<b>Version</b> post-top- or mounting to wall arm <b>Optic</b> asymmetric, wide distribution (ST1.2a) <b>Cover</b> cover transparent, PMMA <b>Lamps</b> LED 2700 K   CRI ≥ 70 <b>Controlgear</b> ECG SITECO iQ <b>Rated values</b> Net luminous flux = 4340 lm Power consumption = 33.6 W Luminous efficacy = 129.2 lm/W	<b>serial documentation</b> <b>18.03.2024</b>



**Luminous intensity in cd/klm** C180-0 C190-10 C195-15 C270-90 **Imax: 813 cd/klm**



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	94.5%
Eta 90° - 180°	5.5%


Luminous intensity class acc. to EN13201-2	
Class:	---
Imax 70°	799.6
Imax 80°	285.8
Imax 90°	34.0
Imax >90°	17.5
Imax >95°	12.2

**Measurement conditions**  
DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> DL 11 iQ	<b>Order number: 5XA5565MF14HP00022</b> <b>EAN: 4058352956236</b>	<b>LP number</b> 59429_126
---------------------------	--	-------------------------------

**Envelope curve in cd/klm**      **KMK 72.5°**    **KMK 70°**    **KMK 67.5°**    **KMK 65°**      **siteco**

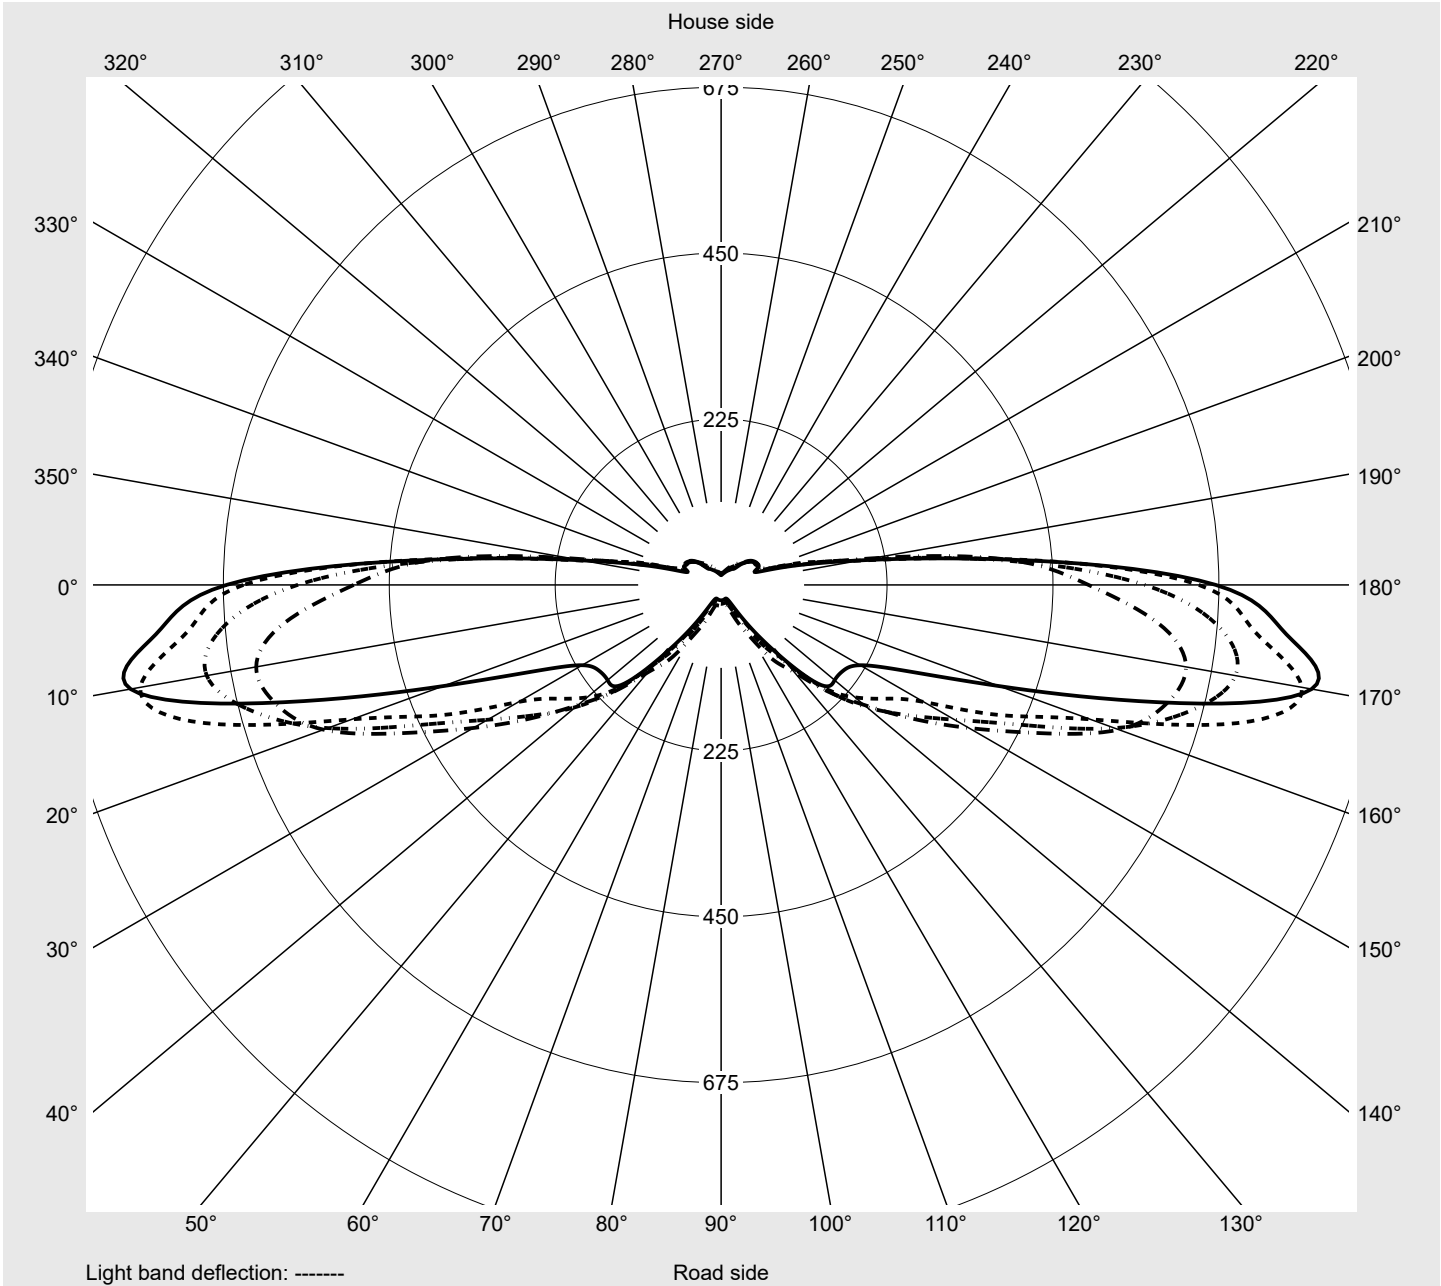

## Photometric test report

<b>Family</b> DL 11 iQ	<b>Order number: 5XA5565MF14HP00022</b> <b>EAN: 4058352956236</b>	<b>LP number</b> 59429_126
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
2,5°	5.9	5.8	5.9	6.0	6.0	5.9	6.1	6.1	6.2	6.2	6.3	6.5	6.7
5,0°	11.1	10.5	10.0	9.4	9.2	9.0	8.9	8.9	9.0	9.1	9.1	9.3	9.3
7,5°	51.0	46.1	42.5	39.9	38.1	36.6	35.7	34.7	34.6	34.0	33.0	32.1	31.1
10,0°	125.2	125.3	128.8	126.8	124.3	116.8	101.6	92.3	89.6	88.8	87.0	85.9	87.1
12,5°	157.8	165.8	167.3	166.7	167.7	171.0	177.7	180.6	167.5	153.4	147.6	146.2	148.0
15,0°	201.1	204.4	204.8	216.7	228.3	228.4	230.0	230.6	242.1	252.3	252.3	242.0	227.8
17,5°	253.8	262.8	270.0	277.9	277.4	289.2	300.2	308.8	306.4	302.3	293.9	287.1	279.8
20,0°	299.1	311.6	328.2	332.9	334.9	330.4	321.5	311.9	309.5	316.8	321.9	316.6	305.0
22,5°	314.6	335.2	358.6	363.0	364.4	364.6	357.3	348.6	332.9	325.4	318.8	322.5	316.2
25,0°	322.1	337.7	358.4	361.9	366.3	367.9	366.4	359.8	344.9	332.8	326.9	317.9	310.3
27,5°	316.5	339.4	351.3	360.2	372.3	372.7	367.6	361.0	352.0	328.9	314.9	310.5	299.8
30,0°	339.1	357.1	365.7	365.0	366.6	371.8	373.7	357.0	339.3	327.0	307.3	300.0	286.5
32,5°	323.4	344.3	362.8	367.9	369.8	358.4	355.5	343.1	320.0	312.0	293.7	283.0	265.5
35,0°	335.2	356.8	354.5	360.1	371.4	375.6	365.5	350.1	327.5	305.1	279.4	264.0	244.6
37,5°	357.1	373.5	386.4	384.8	370.9	357.5	361.1	342.1	320.9	297.5	266.6	246.0	224.5
40,0°	363.8	381.6	392.1	389.7	388.8	367.7	352.3	329.0	302.3	280.4	253.4	223.8	203.9
42,5°	382.3	402.3	413.8	400.9	396.3	380.6	362.2	337.7	297.9	261.8	233.4	208.6	198.8
45,0°	384.2	407.0	433.5	418.1	400.9	367.4	351.6	320.8	286.1	256.5	231.1	200.7	190.7
47,5°	396.6	411.1	439.5	435.0	431.1	383.2	358.6	315.0	276.8	245.4	210.2	189.5	178.8
50,0°	416.7	432.1	454.5	471.8	470.1	407.5	356.6	305.7	255.1	223.1	183.9	175.3	166.3
52,5°	433.9	469.5	465.8	492.6	476.3	426.2	360.0	290.1	244.5	209.3	168.8	162.7	151.9
55,0°	448.3	486.3	481.4	511.7	475.9	443.5	374.1	299.6	239.6	193.1	160.7	161.9	140.5
57,5°	448.9	502.6	510.5	548.2	520.2	455.0	366.9	298.1	237.0	192.7	165.4	157.8	122.0
60,0°	499.1	547.3	582.8	595.0	567.4	479.6	375.6	313.0	253.5	197.7	167.4	150.2	117.9
62,5°	508.9	568.6	608.1	619.3	601.4	492.2	387.9	321.1	256.2	206.2	169.0	135.3	108.2
65,0°	498.2	594.8	640.2	624.5	573.8	475.4	388.0	315.8	253.2	203.9	154.9	124.9	85.7
67,5°	574.4	679.9	708.3	659.2	567.7	448.9	365.6	307.9	257.8	201.5	139.1	100.3	59.7
70,0°	647.9	726.4	799.6	724.2	532.9	417.7	317.4	269.0	237.3	197.6	135.3	82.2	46.1
72,5°	670.9	769.5	813.2	614.7	401.1	275.6	217.8	202.4	201.0	192.1	129.6	74.0	37.0
75,0°	572.7	659.7	603.1	372.2	231.6	175.1	154.5	139.0	140.7	142.2	94.4	54.8	27.2
77,5°	468.0	444.5	344.0	230.3	173.5	141.8	125.2	119.0	101.9	81.7	52.9	33.2	21.1
80,0°	285.8	235.7	176.8	173.6	137.8	94.2	90.9	98.1	70.3	55.6	37.7	24.2	16.4
82,5°	113.1	97.9	110.0	117.4	95.8	70.1	77.6	67.0	40.5	31.9	25.2	18.8	14.1
85,0°	47.4	54.3	66.4	91.3	81.1	55.8	51.6	40.8	26.6	23.1	19.1	14.7	12.3
87,5°	21.5	29.3	43.7	58.6	44.3	33.5	28.3	20.7	16.9	16.4	15.6	12.1	11.3
90,0°	16.4	20.8	29.3	34.0	25.5	18.7	17.7	13.4	12.6	12.9	12.4	11.1	10.8
92,5°	13.1	13.4	17.5	14.9	13.6	12.7	12.0	11.7	11.4	11.1	10.9	10.7	10.4
95,0°	12.3	12.4	12.4	12.3	12.2	12.0	11.7	11.4	11.2	11.0	10.8	10.5	10.4
97,5°	12.2	12.2	12.2	12.2	12.1	11.8	11.6	11.4	11.2	10.9	10.8	10.5	10.4
100,0°	12.2	12.2	12.2	12.2	12.0	11.8	11.6	11.3	11.1	10.8	10.7	10.5	10.4
102,5°	12.2	12.2	12.2	12.2	12.0	11.8	11.6	11.3	11.0	10.9	10.7	10.5	10.4
105,0°	12.2	12.2	12.2	12.1	12.0	11.7	11.4	11.2	11.0	10.8	10.6	10.5	10.4
107,5°	12.1	12.1	12.1	12.0	11.8	11.6	11.3	11.1	10.9	10.7	10.5	10.4	10.3
110,0°	12.0	12.0	11.9	11.9	11.7	11.5	11.3	11.0	10.8	10.6	10.5	10.4	10.3
112,5°	11.9	11.8	11.9	11.7	11.6	11.4	11.1	10.9	10.7	10.5	10.4	10.3	10.2

# Photometric test report

<b>Family</b> DL 11 iQ	<b>Order number: 5XA5565MF14HP00022</b> <b>EAN: 4058352956236</b>	<b>LP number</b> 59429_126
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
2,5°	6.8	7.0	7.1	7.3	7.3	7.4	5.9	5.9	6.0	6.1	6.1	6.1	6.2
5,0°	9.4	9.5	9.7	9.8	9.8	9.8	11.7	12.5	13.8	15.5	17.4	18.5	19.5
7,5°	30.0	28.4	27.6	27.4	26.9	26.6	53.0	53.4	52.5	51.4	50.3	50.6	51.3
10,0°	88.0	90.4	91.0	91.9	92.3	91.4	120.8	120.8	116.9	104.2	91.8	78.5	72.5
12,5°	153.1	158.8	164.5	170.5	172.5	172.3	146.0	139.3	134.8	134.5	129.3	125.1	117.5
15,0°	211.6	200.5	189.3	183.1	178.5	177.9	196.5	190.6	182.9	173.5	168.2	149.9	132.7
17,5°	269.1	253.6	232.4	214.6	204.0	201.5	238.8	229.0	211.4	186.1	168.3	150.0	130.3
20,0°	301.9	298.2	289.8	280.8	274.3	270.1	269.6	250.1	229.7	204.9	176.3	152.9	134.4
22,5°	317.4	318.6	316.8	324.3	342.3	352.1	289.5	263.0	236.5	208.1	175.0	145.3	128.4
25,0°	316.0	319.1	322.1	336.7	346.6	347.4	302.2	279.7	246.3	211.8	174.9	139.4	120.9
27,5°	301.6	301.1	306.9	322.1	329.5	331.3	299.7	276.8	239.1	196.9	169.4	144.6	112.7
30,0°	282.6	280.2	289.2	303.6	307.7	310.4	307.9	277.2	248.6	204.2	170.2	137.6	96.5
32,5°	259.6	260.0	271.1	283.7	286.3	289.7	322.2	300.0	250.5	202.2	164.6	116.8	85.2
35,0°	237.3	241.4	253.3	262.2	264.2	265.8	315.1	290.5	240.9	200.6	160.5	108.3	84.8
37,5°	216.8	222.2	232.2	236.8	236.6	236.7	340.4	316.9	251.2	212.6	149.5	103.0	76.2
40,0°	198.5	203.8	207.7	208.8	205.4	204.6	351.4	322.5	251.3	201.1	135.1	98.7	62.3
42,5°	188.3	182.1	180.8	176.1	168.7	166.1	357.5	306.5	238.4	176.6	123.5	83.0	60.4
45,0°	179.7	164.3	154.8	145.8	136.4	133.1	370.3	314.1	233.4	148.8	105.1	68.9	62.4
47,5°	160.6	141.3	129.1	118.0	110.3	106.6	373.9	300.6	215.6	123.6	82.7	64.1	59.9
50,0°	144.8	124.3	109.5	96.5	87.8	84.2	373.2	284.7	190.0	107.7	66.5	59.7	56.2
52,5°	126.5	104.1	92.6	78.0	68.8	65.8	369.4	267.3	164.9	93.5	62.4	56.7	54.2
55,0°	111.3	85.8	74.1	60.3	54.1	52.5	373.7	256.3	145.8	82.8	62.7	56.7	54.2
57,5°	93.5	75.6	62.0	47.5	43.7	43.4	379.7	263.4	146.9	82.8	62.7	55.2	54.5
60,0°	86.0	60.1	46.8	37.9	37.1	37.0	385.2	246.9	142.8	83.5	61.6	58.2	56.8
62,5°	82.5	48.9	35.8	32.3	32.1	32.1	389.4	223.1	121.9	77.7	56.3	56.6	54.8
65,0°	59.7	38.9	29.0	28.1	28.3	28.5	391.4	207.5	102.2	66.3	55.9	56.8	55.3
67,5°	40.4	28.9	25.1	25.0	25.4	25.7	382.8	200.4	111.7	62.2	54.7	56.8	55.0
70,0°	30.9	24.2	22.2	22.4	23.1	23.2	397.6	189.6	117.8	59.5	55.3	57.1	53.1
72,5°	22.9	19.6	19.7	20.3	20.7	20.8	393.3	191.9	99.3	50.9	55.2	54.4	53.5
75,0°	17.7	17.6	17.9	18.3	18.3	18.3	419.2	216.1	66.2	48.4	52.3	52.6	49.4
77,5°	16.4	16.1	15.9	15.8	15.3	14.8	325.7	169.7	59.3	43.1	47.7	45.8	42.1
80,0°	14.6	14.4	14.2	13.6	13.1	12.8	240.2	191.3	95.9	40.4	43.0	40.2	35.1
82,5°	13.0	12.9	12.4	12.0	11.7	11.7	172.7	107.2	62.9	34.6	35.4	32.5	28.7
85,0°	11.9	11.7	11.3	11.0	11.0	11.0	56.8	56.8	47.3	32.2	28.3	26.8	25.0
87,5°	10.8	10.8	10.6	10.4	10.3	10.2	16.4	24.5	23.0	22.6	22.7	22.9	22.7
90,0°	10.5	10.4	10.2	10.2	9.9	9.8	14.0	14.1	15.8	17.5	19.3	19.3	18.8
92,5°	10.3	10.1	10.0	9.9	9.8	9.8	12.5	12.5	13.5	14.2	14.3	13.4	12.3
95,0°	10.2	10.1	10.0	10.0	9.9	9.9	12.2	12.0	11.8	11.6	11.3	11.0	10.8
97,5°	10.3	10.2	10.1	10.0	10.0	9.9	12.2	12.0	11.8	11.6	11.3	11.0	10.8
100,0°	10.4	10.2	10.2	10.2	10.1	10.1	12.2	12.0	11.8	11.6	11.4	11.1	10.8
102,5°	10.3	10.2	10.1	10.1	10.1	10.0	12.2	12.0	11.9	11.6	11.4	11.1	10.8
105,0°	10.2	10.2	10.1	10.1	10.0	9.9	12.1	12.0	11.8	11.6	11.4	11.1	10.8
107,5°	10.2	10.1	10.1	10.1	9.9	9.9	12.0	11.9	11.7	11.6	11.3	11.0	10.8
110,0°	10.2	10.1	10.0	10.0	9.9	9.9	12.0	11.8	11.7	11.5	11.3	11.0	10.7
112,5°	10.1	10.0	9.9	9.9	9.8	9.9	11.8	11.8	11.6	11.5	11.2	11.0	10.6

# Photometric test report

<b>Family</b> DL 11 iQ	<b>Order number: 5XA5565MF14HP00022</b> <b>EAN: 4058352956236</b>	<b>LP number</b> 59429_126
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sITeco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	0.0	0.0
2,5°	6.4	6.6	6.9	7.4	8.2	8.4	8.2	8.2	8.1	8.1	8.1	0.1	0.1
5,0°	20.5	21.9	22.1	22.1	21.8	21.5	21.2	21.1	21.4	21.7	21.6	0.3	0.4
7,5°	54.1	56.6	54.7	57.0	56.7	52.2	50.1	48.8	50.1	52.2	53.7	1.6	2.0
10,0°	67.9	65.0	64.1	63.9	63.1	60.4	56.1	54.6	56.8	60.3	61.2	4.3	6.3
12,5°	105.0	94.3	82.8	74.6	68.5	61.4	53.4	50.7	51.6	53.4	53.6	7.7	14.0
15,0°	117.7	106.0	96.2	86.9	80.4	70.8	61.5	55.1	52.8	52.7	53.1	11.9	25.8
17,5°	116.0	102.5	92.2	81.9	73.7	69.1	65.4	64.2	62.6	64.0	65.7	16.3	42.1
20,0°	112.3	98.0	86.1	75.6	68.2	63.7	62.0	63.9	62.1	64.8	68.0	20.7	62.8
22,5°	109.1	87.0	73.8	65.2	62.2	59.6	57.2	58.5	55.5	57.5	59.7	24.4	87.2
25,0°	95.8	75.0	64.1	59.0	56.2	55.4	51.6	52.5	50.0	51.2	52.9	27.0	114.2
27,5°	84.0	64.4	58.1	55.3	52.2	51.3	46.6	47.3	44.7	45.9	47.2	28.8	143.0
30,0°	73.6	60.7	55.1	52.7	50.0	47.6	43.0	43.7	41.5	42.2	43.6	30.6	173.6
32,5°	69.6	57.8	52.6	50.6	48.1	44.6	40.4	40.5	38.5	38.9	39.9	31.7	205.3
35,0°	62.5	53.2	51.1	49.4	46.4	42.5	38.3	37.9	35.9	36.0	36.6	33.0	238.3
37,5°	56.9	53.0	50.0	48.5	45.6	41.5	37.0	35.5	33.3	33.5	34.0	34.6	272.9
40,0°	55.3	53.0	50.4	47.5	43.1	38.8	34.7	32.8	30.8	30.7	30.8	35.3	308.2
42,5°	55.4	52.7	50.5	47.2	43.6	38.6	33.3	30.2	28.4	28.2	28.0	36.1	344.3
45,0°	57.1	53.0	50.5	47.4	42.9	37.8	32.8	29.1	26.4	26.2	25.9	36.7	381.0
47,5°	55.9	54.7	53.1	48.6	43.2	37.3	31.9	27.8	25.9	24.6	24.1	37.2	418.2
50,0°	54.3	53.0	52.0	48.5	42.9	36.7	31.1	26.8	24.5	24.8	26.3	37.7	455.9
52,5°	53.4	51.9	50.3	45.7	40.3	34.7	30.0	26.3	25.0	24.6	24.3	38.2	494.1
55,0°	52.7	50.6	48.6	43.5	39.1	34.8	30.2	25.1	21.8	21.2	20.6	38.9	533.0
57,5°	53.3	51.2	49.7	43.7	36.9	31.3	26.6	22.6	20.1	19.5	19.0	40.3	573.3
60,0°	53.3	48.2	45.6	40.4	34.8	29.8	25.5	21.8	19.4	18.8	18.1	43.0	616.3
62,5°	51.9	45.6	42.0	37.7	33.0	28.2	24.4	21.1	18.7	17.8	17.2	44.2	660.4
65,0°	51.0	43.7	38.4	34.5	30.4	26.4	22.6	19.7	17.6	16.6	16.1	44.0	704.4
67,5°	49.7	42.3	35.2	31.2	27.7	24.4	21.3	18.8	16.9	15.8	15.1	45.3	749.8
70,0°	48.6	41.0	32.4	28.6	25.5	22.8	20.2	17.9	16.2	15.0	14.1	46.3	796.1
72,5°	48.5	41.5	29.9	26.3	23.6	21.3	19.2	17.1	15.5	14.0	13.2	42.7	838.7
75,0°	44.3	38.7	27.8	24.7	22.0	20.1	19.4	18.0	16.5	15.0	14.1	34.0	872.8
77,5°	37.7	31.2	27.1	24.7	22.3	20.1	19.8	19.2	18.7	17.1	16.2	25.3	898.1
80,0°	28.5	26.9	24.9	22.8	20.8	18.9	18.2	17.7	17.8	16.4	15.8	18.6	916.7
82,5°	25.3	24.8	21.9	20.2	18.9	17.4	16.1	14.8	14.4	12.9	12.1	12.2	928.8
85,0°	23.7	22.6	18.5	16.8	15.9	15.1	14.0	12.8	12.2	11.4	10.8	8.3	937.1
87,5°	22.5	19.6	15.7	14.5	13.8	13.1	12.3	11.5	11.0	10.1	9.5	5.4	942.5
90,0°	18.9	15.3	13.2	12.3	11.4	10.8	10.4	10.0	9.6	8.3	7.5	4.1	946.6
92,5°	11.4	10.8	10.3	10.0	9.5	9.2	8.9	8.6	8.3	7.3	6.5	3.1	949.7
95,0°	10.4	10.2	9.8	9.6	9.2	9.0	8.7	8.5	8.1	7.2	6.4	2.9	952.6
97,5°	10.4	10.1	9.8	9.6	9.3	9.0	8.7	8.6	8.2	7.2	6.4	2.9	955.5
100,0°	10.4	10.2	9.9	9.6	9.3	9.1	8.9	8.6	8.3	7.2	6.4	2.9	958.3
102,5°	10.4	10.2	9.9	9.6	9.3	9.1	8.9	8.6	8.3	7.3	6.6	2.8	961.1
105,0°	10.4	10.2	9.9	9.6	9.3	9.1	8.8	8.6	8.3	7.3	6.7	2.8	963.9
107,5°	10.4	10.1	9.8	9.6	9.3	9.0	8.7	8.5	8.2	7.2	6.6	2.7	966.7
110,0°	10.4	10.1	9.8	9.5	9.2	9.0	8.7	8.4	8.2	7.2	6.7	2.7	969.4
112,5°	10.3	10.1	9.8	9.5	9.2	8.9	8.7	8.4	8.0	7.2	6.7	2.6	972.0

## Photometric test report

Family <b>DL 11 iQ</b>	Order number: <b>5XA5565MF14HP00022</b> EAN: <b>4058352956236</b>	LP number <b>59429_126</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
115,0°	11.8	11.8	11.7	11.6	11.5	11.3	11.0	10.8	10.6	10.4	10.2	10.2	10.1
117,5°	11.6	11.6	11.6	11.4	11.3	11.1	10.8	10.6	10.5	10.3	10.2	10.0	9.9
120,0°	11.4	11.3	11.3	11.2	11.1	10.9	10.7	10.5	10.3	10.2	10.0	9.9	9.8
122,5°	11.1	11.0	11.0	10.9	10.8	10.6	10.4	10.3	10.1	10.0	9.8	9.8	9.6
125,0°	10.7	10.8	10.7	10.6	10.5	10.3	10.2	10.0	9.9	9.8	9.6	9.5	9.4
127,5°	10.4	10.4	10.4	10.3	10.2	10.1	9.9	9.8	9.7	9.5	9.4	9.3	9.2
130,0°	10.0	10.0	9.9	9.9	9.8	9.8	9.6	9.5	9.4	9.3	9.2	9.1	9.1
132,5°	9.6	9.6	9.6	9.5	9.5	9.4	9.3	9.2	9.1	9.0	8.9	8.9	8.8
135,0°	9.1	9.1	9.1	9.1	9.1	9.0	8.9	8.9	8.8	8.7	8.6	8.6	8.6
137,5°	8.6	8.6	8.7	8.7	8.7	8.6	8.6	8.6	8.6	8.4	8.4	8.4	8.3
140,0°	8.2	8.3	8.3	8.3	8.4	8.3	8.2	8.2	8.2	8.2	8.1	8.1	8.1
142,5°	7.8	7.9	8.0	8.1	8.1	8.0	8.0	7.9	7.9	7.9	7.9	7.9	7.8
145,0°	7.5	7.5	7.5	7.6	7.6	7.7	7.7	7.7	7.7	7.7	7.7	7.6	7.5
147,5°	6.9	7.1	7.1	7.1	7.2	7.2	7.2	7.3	7.3	7.3	7.2	7.2	7.2
150,0°	6.3	6.3	6.4	6.4	6.5	6.6	6.6	6.6	6.6	6.6	6.6	6.7	6.7
152,5°	5.4	5.4	5.5	5.5	5.6	5.7	5.7	5.7	5.7	5.7	5.7	5.8	5.8
155,0°	4.2	4.3	4.4	4.5	4.5	4.5	4.6	4.6	4.7	4.7	4.7	4.7	4.7
157,5°	3.2	3.2	3.3	3.3	3.3	3.3	3.4	3.5	3.5	3.5	3.5	3.5	3.6
160,0°	2.2	2.2	2.3	2.3	2.3	2.3	2.3	2.4	2.4	2.4	2.3	2.4	2.4
162,5°	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	2.0	2.0	2.1
165,0°	1.6	1.6	1.6	1.7	1.7	1.8	1.9	1.9	1.9	1.9	1.9	1.9	1.9
167,5°	1.5	1.5	1.5	1.5	1.6	1.7	1.7	1.7	1.7	1.9	1.9	2.0	1.9
170,0°	1.4	1.3	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.5
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> DL 11 iQ	<b>Order number: 5XA5565MF14HP00022</b> <b>EAN: 4058352956236</b>	<b>LP number</b> 59429_126
---------------------------	--	-------------------------------



<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>
---	-----------------------------------

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
115,0°	10.0	9.9	9.8	9.8	9.8	9.8	11.7	11.7	11.5	11.4	11.2	11.0	10.6
117,5°	9.9	9.8	9.8	9.8	9.6	9.6	11.5	11.5	11.4	11.2	11.0	10.8	10.5
120,0°	9.8	9.7	9.6	9.6	9.6	9.6	11.3	11.3	11.2	11.0	10.8	10.6	10.3
122,5°	9.6	9.4	9.4	9.4	9.4	9.4	11.0	11.0	10.8	10.7	10.5	10.3	10.1
125,0°	9.4	9.3	9.2	9.2	9.2	9.2	10.6	10.6	10.5	10.4	10.2	10.0	9.8
127,5°	9.2	9.1	9.1	9.1	9.1	9.1	10.3	10.3	10.2	10.1	9.9	9.8	9.5
130,0°	9.0	8.9	8.9	8.9	8.8	8.7	9.9	9.9	9.8	9.6	9.5	9.4	9.2
132,5°	8.7	8.7	8.6	8.6	8.6	8.6	9.5	9.5	9.3	9.2	9.1	9.0	8.8
135,0°	8.5	8.4	8.4	8.4	8.4	8.4	9.0	9.0	8.8	8.7	8.6	8.4	8.3
137,5°	8.3	8.2	8.2	8.2	8.2	8.1	8.5	8.4	8.4	8.3	8.1	8.1	7.9
140,0°	8.1	7.9	7.9	7.9	7.9	7.9	8.1	8.1	8.0	7.9	7.8	7.6	7.5
142,5°	7.8	7.7	7.7	7.7	7.7	7.7	7.8	7.7	7.6	7.5	7.4	7.3	7.2
145,0°	7.6	7.5	7.5	7.5	7.5	7.5	7.4	7.3	7.2	7.1	7.1	6.9	6.9
147,5°	7.2	7.2	7.2	7.2	7.2	7.2	6.9	6.8	6.7	6.6	6.6	6.4	6.4
150,0°	6.7	6.7	6.7	6.7	6.7	6.7	6.1	6.0	6.0	5.9	5.7	5.7	5.6
152,5°	5.8	5.8	5.8	5.8	5.8	5.8	5.3	5.2	5.1	5.0	4.9	4.8	4.7
155,0°	4.8	4.8	4.8	4.8	4.8	4.7	4.2	4.1	4.0	4.0	3.9	3.8	3.7
157,5°	3.5	3.5	3.5	3.5	3.4	3.4	3.1	3.0	3.0	3.0	2.9	2.8	2.8
160,0°	2.4	2.4	2.4	2.4	2.4	2.4	2.1	2.1	2.1	2.1	2.1	2.1	2.1
162,5°	2.1	2.1	2.1	2.1	2.0	1.9	1.9	1.8	1.8	1.8	1.8	1.8	1.8
165,0°	1.9	1.9	1.7	1.7	1.7	1.7	1.6	1.6	1.6	1.7	1.7	1.7	1.7
167,5°	1.7	1.6	1.6	1.5	1.5	1.5	1.4	1.5	1.5	1.5	1.5	1.5	1.5
170,0°	1.5	1.4	1.5	1.5	1.5	1.5	1.3	1.4	1.4	1.4	1.3	1.3	1.4
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

Family <b>DL 11 iQ</b>	Order number: <b>5XA5565MF14HP00022</b> EAN: <b>4058352956236</b>	LP number <b>59429_126</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sITeco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	10.3	10.0	9.7	9.5	9.2	8.9	8.6	8.3	8.0	7.2	6.7	2.5	974.5
117,5°	10.2	9.9	9.6	9.3	9.0	8.8	8.5	8.2	7.9	7.1	6.7	2.5	977.0
120,0°	10.1	9.8	9.5	9.2	8.9	8.7	8.4	8.1	7.7	7.0	6.7	2.4	979.3
122,5°	9.8	9.5	9.2	9.0	8.7	8.5	8.2	7.9	7.6	6.9	6.6	2.3	981.6
125,0°	9.5	9.2	9.0	8.8	8.5	8.3	8.0	7.7	7.5	6.8	6.5	2.1	983.7
127,5°	9.2	9.1	8.8	8.5	8.3	8.1	7.7	7.5	7.1	6.7	6.5	2.0	985.7
130,0°	9.0	8.7	8.5	8.3	8.1	7.8	7.5	7.2	6.9	6.6	6.4	1.9	987.6
132,5°	8.6	8.3	8.1	7.9	7.7	7.5	7.2	6.8	6.6	6.3	6.2	1.7	989.4
135,0°	8.1	7.8	7.7	7.5	7.3	7.2	6.9	6.5	6.3	6.1	6.0	1.6	991.0
137,5°	7.7	7.5	7.4	7.2	7.0	6.9	6.6	6.3	6.1	6.0	6.0	1.5	992.4
140,0°	7.3	7.1	7.1	6.9	6.8	6.4	6.4	6.0	5.9	5.8	5.8	1.3	993.8
142,5°	7.1	6.9	6.8	6.7	6.5	6.2	6.1	5.8	5.7	5.7	5.7	1.2	995.0
145,0°	6.7	6.6	6.5	6.4	6.3	6.2	5.9	5.6	5.6	5.6	5.7	1.1	996.1
147,5°	6.3	6.2	6.0	6.0	5.8	5.8	5.5	5.3	5.2	5.3	5.3	1.0	997.1
150,0°	5.5	5.4	5.4	5.2	5.1	5.0	4.8	4.6	4.6	4.6	4.6	0.8	997.9
152,5°	4.7	4.5	4.5	4.3	4.3	4.2	4.0	3.9	3.8	3.8	3.8	0.6	998.6
155,0°	3.6	3.6	3.5	3.4	3.3	3.3	3.3	3.1	3.1	3.1	3.0	0.5	999.0
157,5°	2.8	2.7	2.7	2.6	2.6	2.5	2.4	2.4	2.4	2.4	2.4	0.3	999.4
160,0°	2.1	2.1	2.1	2.1	1.9	1.9	1.9	1.9	1.9	1.9	1.9	0.2	999.6
162,5°	1.7	1.8	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	0.2	999.7
165,0°	1.7	1.7	1.6	1.5	1.5	1.6	1.5	1.5	1.5	1.6	1.5	0.1	999.8
167,5°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.4	0.1	999.9
170,0°	1.3	1.3	1.3	1.4	1.4	1.4	1.3	1.3	1.4	1.3	1.4	0.1	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0



## Photometric test report

Family DL 11 iQ	Order number: 5XA5565MF14HP00022 EAN: 4058352956236	LP number 59429_126
--------------------	--	------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	4340	33.6	35.9	34.8
95	241	252	4118	31.3	33.5	32.4
90	229	250	3913	29.4	31.4	30.4
85	216	248	3691	27.3	29.2	28.2
80	203	246	3469	25.4	27.1	26.2
75	190	243	3246	23.5	25.1	24.3
70	178	241	3041	21.9	23.3	22.6
65	165	238	2819	20.1	21.4	20.8
60	152	235	2597	18.4	19.5	19.0
55	140	232	2392	16.8	17.9	17.4
50	127	229	2170	15.2	16.2	15.7
45	114	225	1948	13.6	14.5	14.0
40	102	221	1743	12.2	13.0	12.6
35	89	216	1521	10.7	11.3	11.0
30	76	210	1299	9.2	9.7	9.4
25	63	203	1076	7.8	8.2	8.0
20	51	195	871	6.6	6.9	6.8
15	38	184	649	5.2	5.5	5.4
11	28	173	478	4.1	4.4	4.2