

## Photometric test report

**Family**  
**Licross® 11 Protected**

**Order number: 51TS12DN48XF3S4**  
**EAN: 4058352676820**

**LP number**  
**58522\_223**




**Version** prismatic cover, frosted, wide distribution  
**Lamps** LED 4000 K | CRI ≥ 80  
**Controlgear** ECG-DALI  
**Setting** emergency light operation: 3 h  
**Rated values** Net luminous flux = 810 lm  
 Power consumption = 5.0 W  
 Luminous efficacy = 162 lm/W

**serial**  
**documentation**  
**21.07.2022**

**sitEco**

**Luminous intensity in cd/klm** **C180-0** **C270-90**

**Imax: 420 cd/klm**

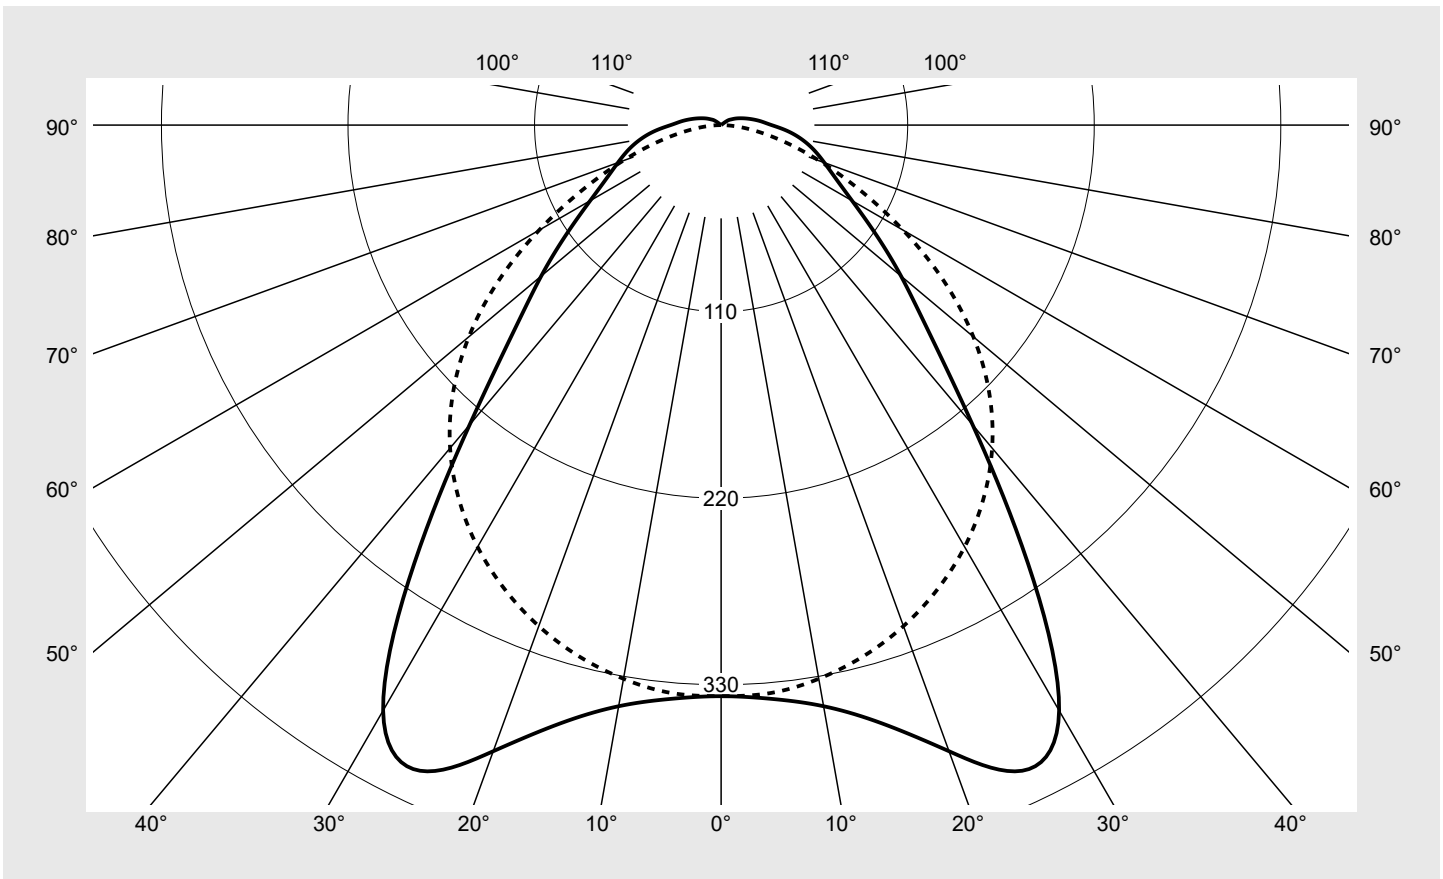

### Classifications

DIN 5040 A 4 1  
 CIE N1=54 N2=82 N3=95  
 N4=97 N5=100

### Luminaire light output ratios

$\eta_{LB}$  100.0%  
 $\phi_u$  96.8%  
 $\phi_o$  3.2%

### Measurement conditions

DIN EN 13032 and DIN 5032

## Photometric test report

Family <b>Licross® 11 Protected</b>	Order number: <b>51TS12DN48XF3S4</b> EAN: <b>4058352676820</b>	LP number <b>58522_223</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes $\gamma$	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	336.7	336.7	336.7	336.7	336.7	336.7	336.7	2.0	2.0
5°	339.6	338.6	335.9	336.3	336.9	336.0	336.1	16.1	18.1
10°	347.9	347.0	341.3	338.0	335.2	332.1	331.5	32.3	50.4
15°	365.1	363.4	352.6	343.0	333.9	326.3	324.2	48.8	99.2
20°	392.9	389.6	370.2	350.5	332.5	318.7	314.4	66.1	165.3
25°	420.1	417.2	393.2	361.7	330.8	309.3	301.9	83.9	249.2
30°	398.6	403.0	395.6	369.9	329.0	297.6	287.2	97.7	346.8
35°	315.4	327.2	346.9	353.5	322.7	283.2	269.5	100.9	447.7
40°	230.7	242.3	270.7	302.4	300.6	265.5	248.6	95.2	542.9
45°	173.9	182.1	205.6	239.8	258.3	240.0	223.6	85.6	628.5
50°	138.5	144.5	161.6	188.3	208.7	204.6	194.1	75.2	703.7
55°	110.6	115.5	130.2	150.3	164.6	163.9	160.4	64.4	768.0
60°	89.1	92.4	103.6	120.9	128.5	124.9	123.9	53.5	821.6
65°	74.6	76.3	82.5	95.4	99.4	91.8	89.8	43.7	865.3
70°	64.8	65.1	66.4	73.4	75.2	65.0	61.7	35.1	900.3
75°	56.7	56.1	54.1	55.3	54.0	43.4	39.3	27.4	927.8
80°	48.3	47.2	43.9	40.6	36.4	26.8	21.9	20.7	948.5
85°	39.1	38.0	34.5	29.4	22.9	14.4	9.1	14.9	963.3
90°	29.8	28.8	25.7	20.2	13.1	5.8	0.8	9.9	973.3
95°	24.0	23.5	21.4	16.6	9.9	3.5	0.7	7.9	981.2
100°	19.2	18.8	17.3	13.3	7.4	1.9	0.6	6.2	987.4
105°	15.1	14.8	13.6	10.2	5.0	0.8	0.6	4.6	992.0
110°	11.8	11.3	10.2	7.3	2.9	0.6	0.6	3.3	995.3
115°	9.0	8.5	7.3	4.7	1.4	0.7	0.7	2.3	997.6
120°	6.6	6.1	4.9	2.7	0.8	0.7	0.7	1.5	999.1
125°	4.4	4.0	2.9	1.3	0.7	0.8	0.8	0.9	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

Family <b>Licross® 11 Protected</b>	Order number: <b>51TS12DN48XF3S4</b> EAN: <b>4058352676820</b>	LP number <b>58522_223</b>
--	---	-------------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	12.4	14.1	12.8	14.4	14.7	14.3	16.0	14.7	16.3	16.6
	3H	13.6	15.1	14.0	15.4	15.8	15.3	16.8	15.7	17.1	17.5
	4H	14.3	15.7	14.7	16.0	16.4	15.7	17.1	16.1	17.4	17.8
	6H	15.1	16.3	15.5	16.7	17.1	15.9	17.2	16.3	17.6	18.0
	8H	15.5	16.7	15.9	17.1	17.5	16.1	17.2	16.5	17.6	18.0
	12H	15.9	17.0	16.3	17.4	17.8	16.1	17.2	16.5	17.6	18.0
4H	2H	13.3	14.7	13.7	15.0	15.4	14.8	16.1	15.2	16.5	16.9
	3H	14.6	15.8	15.1	16.2	16.6	16.0	17.2	16.5	17.6	18.0
	4H	15.4	16.5	15.9	16.9	17.3	16.5	17.6	17.0	18.0	18.4
	6H	16.3	17.3	16.8	17.7	18.2	16.9	17.8	17.3	18.3	18.7
	8H	16.8	17.7	17.3	18.1	18.6	17.0	17.9	17.5	18.3	18.8
	12H	17.3	18.1	17.8	18.5	19.0	17.1	17.9	17.6	18.3	18.8
8H	4H	15.9	16.7	16.3	17.2	17.6	16.8	17.7	17.3	18.1	18.6
	6H	16.9	17.7	17.4	18.1	18.6	17.3	18.1	17.8	18.5	19.0
	8H	17.5	18.2	18.0	18.6	19.2	17.5	18.2	18.0	18.7	19.2
	12H	18.2	18.7	18.7	19.2	19.7	17.7	18.2	18.2	18.7	19.3
12H	4H	15.9	16.7	16.4	17.1	17.6	16.9	17.6	17.4	18.1	18.6
	6H	17.1	17.7	17.6	18.2	18.7	17.5	18.1	18.0	18.6	19.1
	8H	17.7	18.3	18.2	18.8	19.3	17.7	18.3	18.2	18.8	19.3

<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 1480</b>	<b>H(C0) = 13</b>	<b>H(C180) = 13</b>
			<b>B = 78</b>	<b>H(C90) = 0</b>	<b>H(C270) = 0</b>

C-planes	$\gamma$	Luminance in cd/m <sup>2</sup>							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		1478.8	1556.5	1782.7	2128.6	2365.5	2282.8	2219.0	
50°		1261.1	1323.1	1505.3	1802.5	2072.2	2124.7	2119.0	
55°		1092.5	1148.7	1320.9	1573.8	1799.7	1888.6	1961.8	
60°		970.6	1014.0	1163.1	1408.7	1575.9	1630.7	1739.3	
65°		912.8	942.0	1045.8	1264.9	1400.6	1395.6	1491.3	
70°		911.2	926.6	975.9	1137.8	1255.1	1192.6	1265.7	
75°		946.9	950.9	953.2	1040.4	1117.6	1013.0	1064.9	
80°		1002.9	997.7	975.9	982.7	998.3	870.5	883.4	
85°		1082.7	1076.8	1047.5	1008.9	945.3	774.3	734.4	

**Photometric test report**

**Family**  
Licross® 11 Protected

**Order number: 51TS12DN48XF3S4**  
**EAN: 4058352676820**

**LP number**  
**58522\_223**

**Luminance values in cd/m<sup>2</sup>**

$\gamma$  65°   
   $\gamma$  70°   
   $\gamma$  75°   
   $\gamma$  80°   
   $\gamma$  85°

