




Photometric test report

Family Licross® 11 Recessed	Order number: 51TE11DN4EXS EAN: 4058352926659	LP number 58784_294
	Version cover frosted, narrow distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Rated values Net luminous flux = 14000 lm Power consumption = 76.8 W Luminous efficacy = 182.3 lm/W	serial documentation 14.09.2023
		

Luminous intensity in cd/klm C180-0 C270-90 Imax: 3431 cd/klm

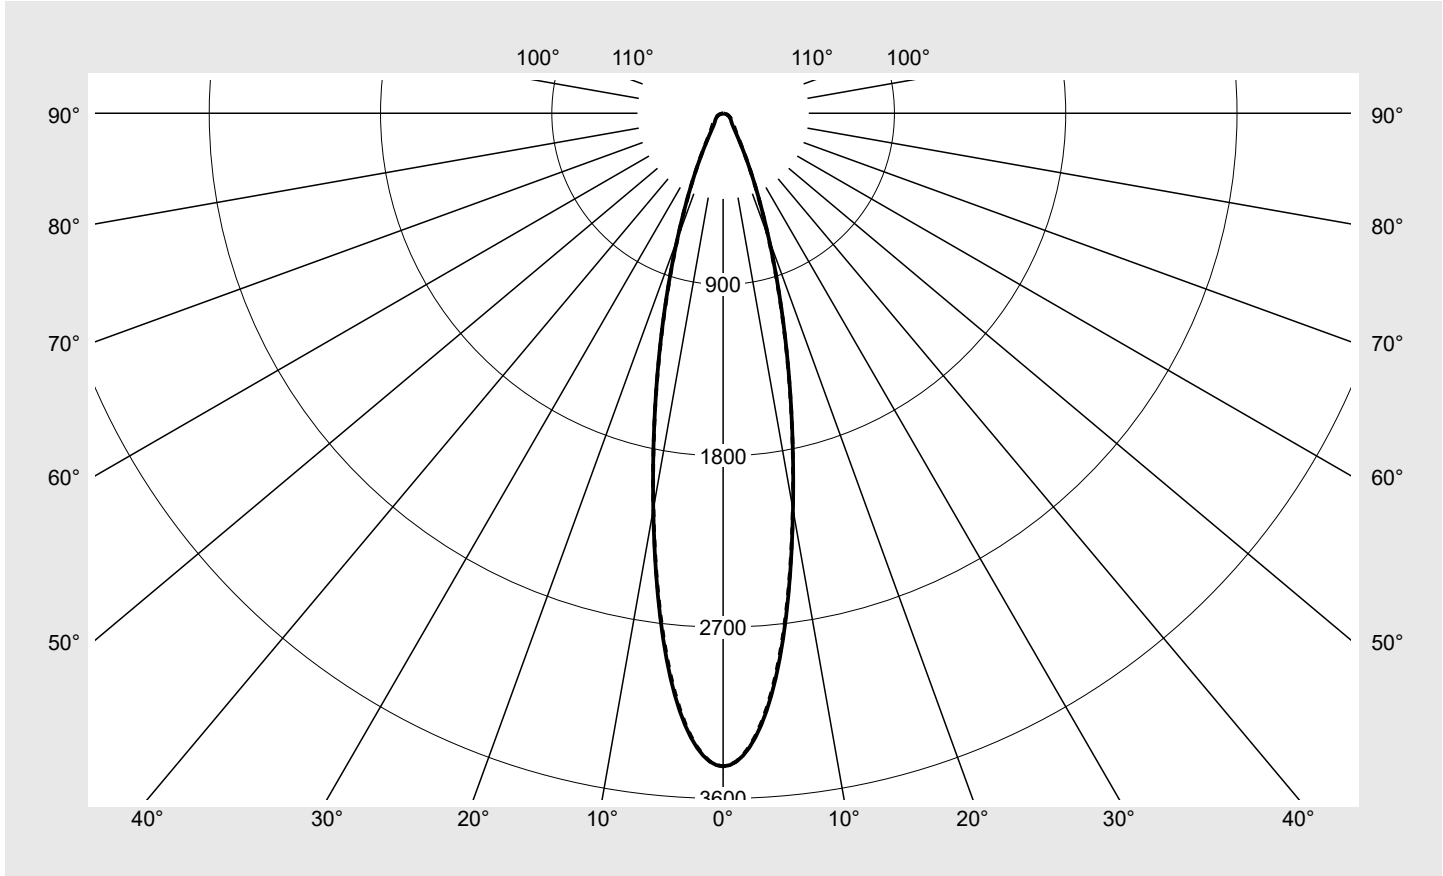

Classifications	
DIN 5040	A 7 0
CIE	N1=87 N2=95 N3=99 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE11DN4EXS EAN: 4058352926659	LP number 58784_294
----------------------------------------------	----------------------------------------------------------------	--------------------------------------

sitEco

Table of values for luminous intensities	Maximum luminous intensity
-------------------------------------------------	-----------------------------------

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	3431.3	3431.3	3431.3	3431.3	3431.3	3431.3	3431.3	20.5	20.5
5°	3030.0	3009.9	2995.2	3008.4	3015.8	3015.7	3017.5	143.9	164.4
10°	2113.5	2098.5	2092.1	2104.8	2111.9	2109.7	2109.2	200.3	364.7
15°	1287.2	1281.7	1283.9	1294.7	1294.7	1286.2	1283.2	182.7	547.4
20°	703.4	705.4	717.6	726.5	719.3	702.5	697.3	133.5	680.9
25°	354.0	358.8	370.9	376.0	367.5	355.6	354.0	84.3	765.2
30°	176.2	179.2	185.6	185.7	179.6	178.8	183.6	49.7	814.9
35°	102.4	102.6	103.9	102.5	99.6	107.7	116.7	32.8	847.7
40°	73.1	72.4	71.7	70.6	70.7	80.9	90.2	26.3	874.0
45°	60.7	58.7	57.0	56.9	57.9	66.7	75.5	23.6	897.6
50°	52.7	51.5	51.2	50.6	50.0	56.0	63.2	22.2	919.8
55°	44.8	43.4	45.4	45.0	43.0	46.3	51.7	20.3	940.1
60°	37.3	36.1	38.2	39.8	37.2	38.0	41.8	18.1	958.2
65°	29.8	28.9	31.0	34.0	31.7	30.7	33.0	15.5	973.8
70°	21.9	21.7	22.9	26.9	25.3	23.3	24.3	12.3	986.1
75°	12.2	12.7	14.5	18.5	17.7	15.7	16.0	8.2	994.3
80°	5.5	5.6	6.4	9.0	10.0	8.8	8.6	4.2	998.5
85°	2.2	2.1	2.4	3.2	3.5	3.4	3.0	1.6	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE11DN4EXS EAN: 4058352926659	LP number 58784_294
---------------------------------------	----------------------------------------------------------------	-------------------------------

UGR-Table	Standard room	siteco	
-----------	---------------	--------	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	17.2	18.3	17.5	18.6	18.9	17.6	18.7	17.9	19.0	19.3
	3H	18.5	19.5	18.9	19.8	20.2	19.0	19.9	19.4	20.3	20.6
	4H	18.9	19.8	19.3	20.2	20.5	19.5	20.4	19.9	20.7	21.1
	6H	19.1	19.9	19.5	20.2	20.6	19.8	20.6	20.2	21.0	21.4
	8H	19.2	19.9	19.6	20.2	20.6	20.0	20.7	20.4	21.1	21.5
	12H	19.1	19.8	19.6	20.2	20.6	20.0	20.6	20.4	21.0	21.5
4H	2H	17.9	18.8	18.3	19.2	19.6	18.2	19.1	18.6	19.5	19.9
	3H	19.4	20.1	19.8	20.5	21.0	19.8	20.6	20.2	21.0	21.4
	4H	19.8	20.5	20.3	20.9	21.4	20.4	21.1	20.9	21.5	22.0
	6H	20.0	20.6	20.5	21.0	21.5	20.8	21.4	21.3	21.8	22.3
	8H	20.1	20.6	20.6	21.0	21.5	21.0	21.5	21.4	21.9	22.4
	12H	20.1	20.5	20.6	21.0	21.5	21.0	21.4	21.5	21.9	22.4
8H	4H	20.2	20.7	20.7	21.1	21.6	20.7	21.2	21.2	21.7	22.1
	6H	20.4	20.8	20.9	21.3	21.8	21.2	21.6	21.8	22.1	22.6
	8H	20.5	20.8	21.0	21.3	21.8	21.4	21.7	21.9	22.2	22.8
	12H	20.5	20.8	21.0	21.3	21.8	21.5	21.8	22.0	22.3	22.8
12H	4H	20.2	20.6	20.7	21.1	21.6	20.7	21.1	21.2	21.6	22.1
	6H	20.4	20.8	21.0	21.3	21.8	21.2	21.6	21.7	22.1	22.6
	8H	20.5	20.8	21.0	21.3	21.9	21.4	21.7	21.9	22.2	22.8

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1500 B = 58
-----------------	---------------------------------	-------------------------------	--------------------

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		13817.2	13363.9	12979.5	12944.9	13175.4	15173.5	17190.8	
50°		13204.8	12899.6	12829.2	12674.3	12509.3	14022.7	15825.4	
55°		12581.2	12187.6	12745.0	12630.6	12070.0	13000.9	14498.8	
60°		12003.6	11611.6	12283.3	12803.4	11983.4	12230.2	13465.4	
65°		11340.4	11017.1	11800.8	12929.0	12087.1	11701.8	12561.9	
70°		10288.8	10200.9	10768.7	12635.7	11904.5	10961.6	11450.5	
75°		7608.9	7883.7	8992.3	11479.9	10988.7	9733.4	9926.8	
80°		5134.8	5182.1	5959.6	8364.4	9228.1	8120.7	7970.5	
85°		4039.8	3962.3	4374.0	5854.8	6416.0	6227.7	5492.9	

Photometric test report

Family
Licross® 11 Recessed


Order number: 51TE11DN4EXS
EAN: 4058352926659

LP number
58784_294

Luminance values in cd/m²



γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

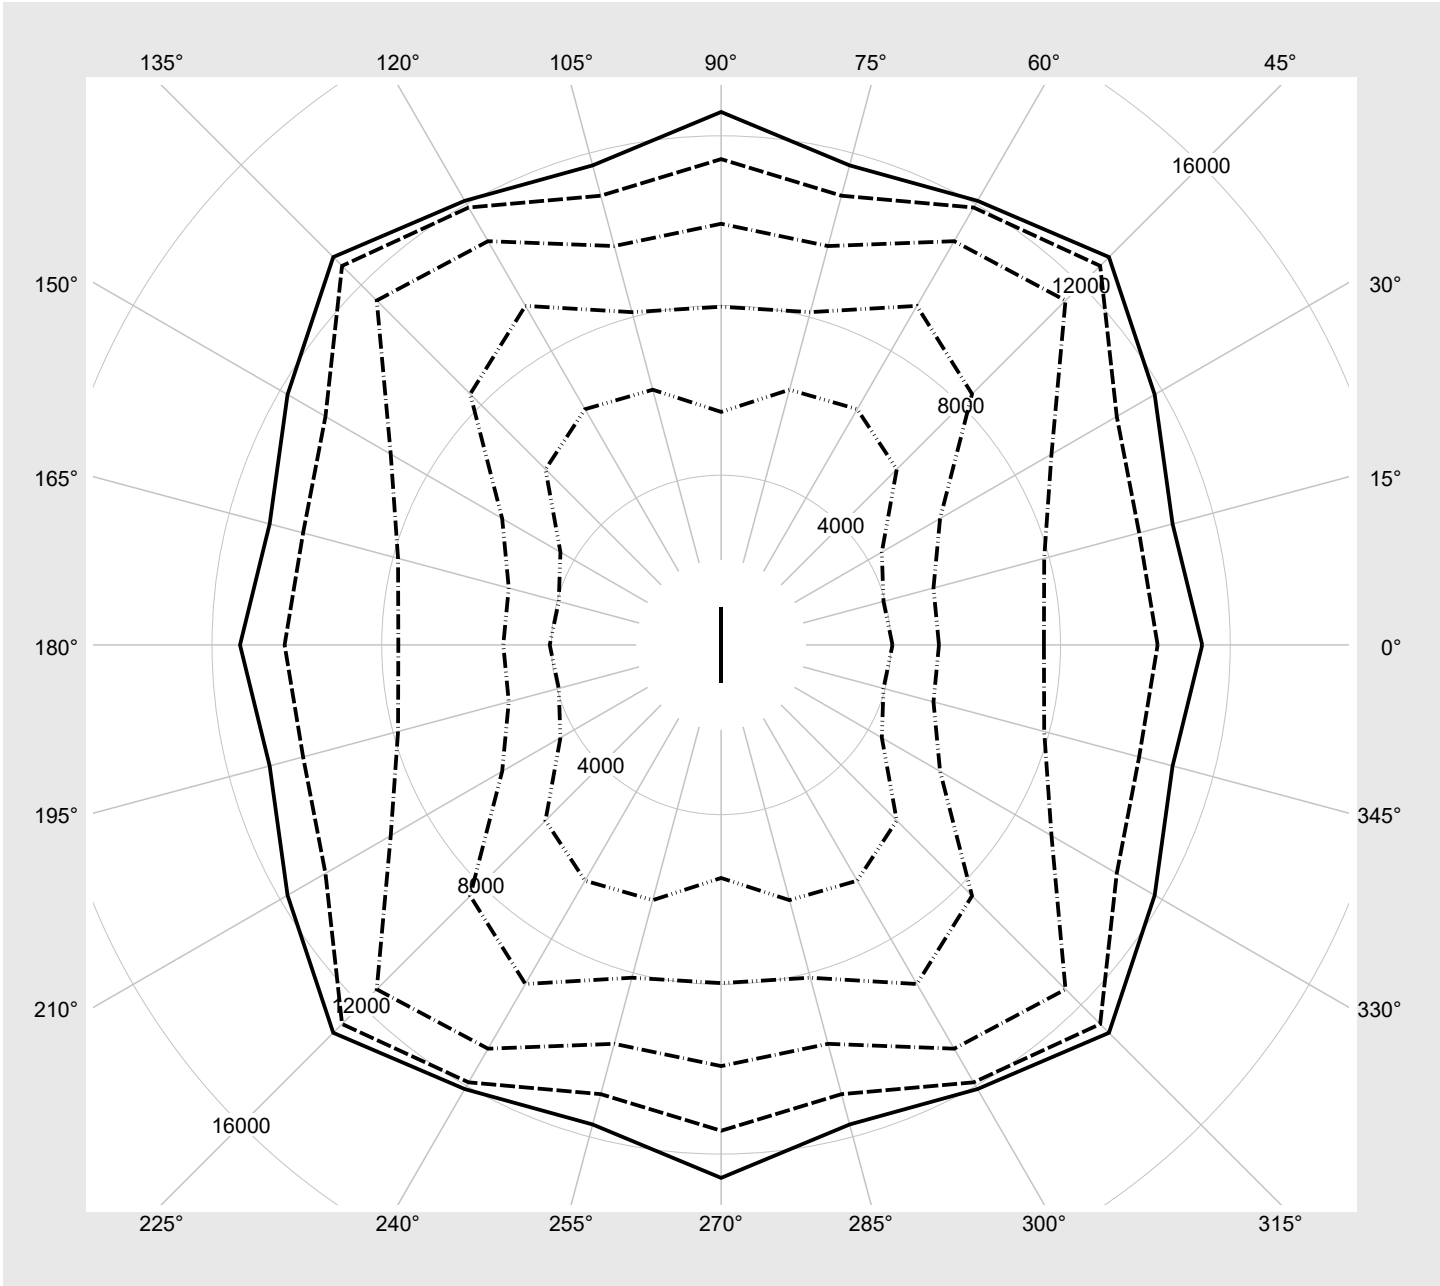

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE11DN4EXS EAN: 4058352926659	LP number 58784_294
---------------------------------------	----------------------------------------------------------------	--------------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	14000	76.8
95	240	252	13284	72.6
90	227	250	12613	68.6
85	213	248	11882	64.3
80	200	245	11200	60.3
75	187	243	10512	56.5
70	174	240	9821	52.6
65	161	237	9125	48.7
60	148	234	8419	44.8
55	135	231	7712	41.0
50	122	227	6995	37.3
45	109	223	6274	33.5
40	97	219	5602	30.0
35	85	214	4924	26.6
30	72	208	4184	22.9
25	60	201	3497	19.5
20	48	193	2803	16.1
15	36	182	2106	12.6
10	24	168	1404	9.2
5	12	142	695	5.9
2	4	102	219	3.6