
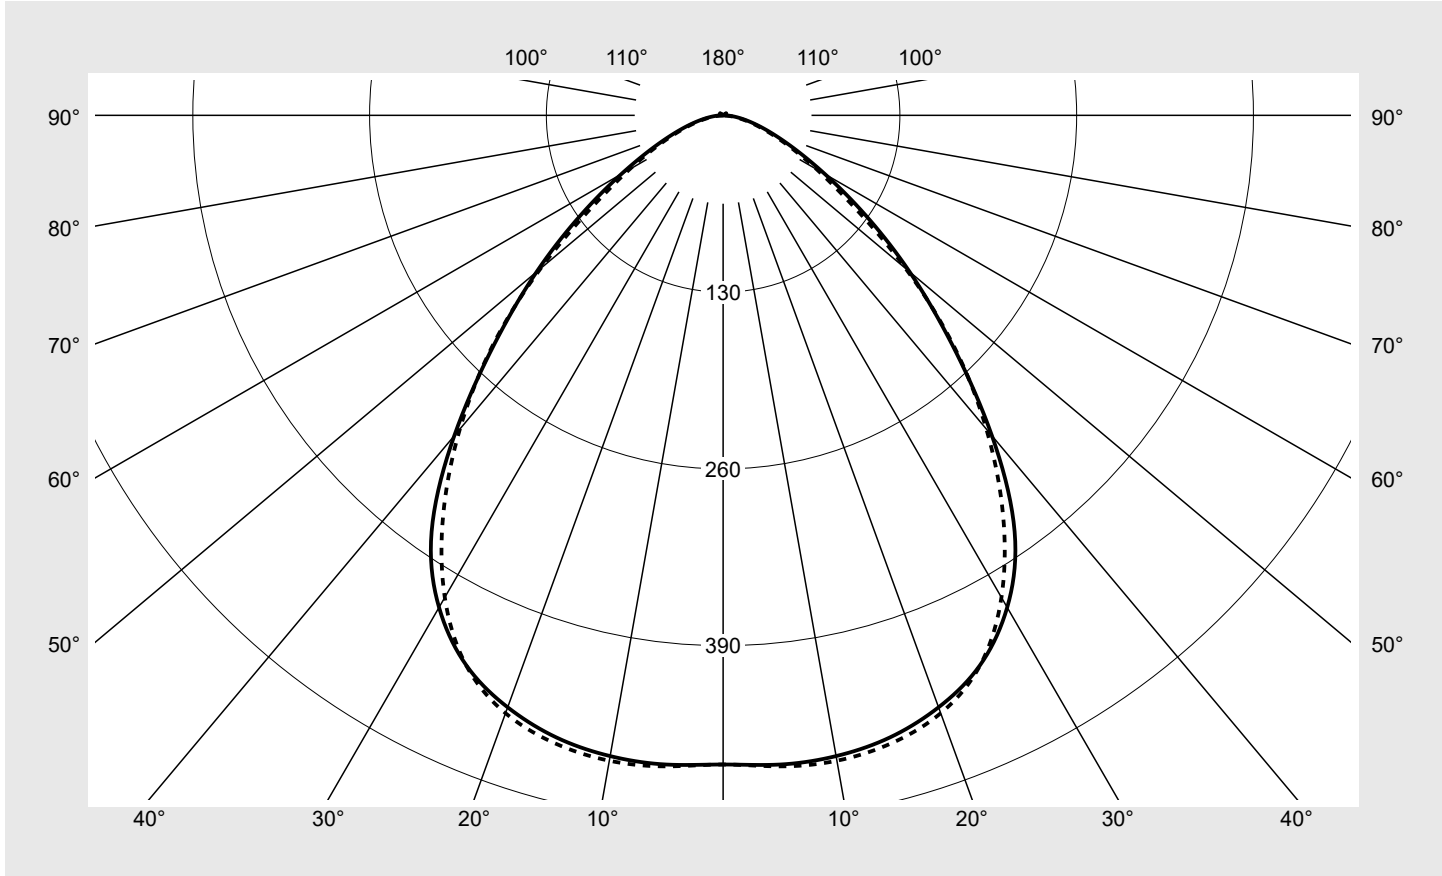


Photometric test report

Family Trunking Flex 31	Order number: 51RF12MB4BXG5 EAN: 4069025494481	LP number 59302_200
	Version primary light control with lens, transparent, PMMA, wide distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG Multilumen Rated values Net luminous flux = 11560 lm Power consumption = 65.3 W Luminous efficacy = 177 lm/W	serial documentation 06.08.2025
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 482 cd/klm**



Classifications	
DIN 5040	A 5 2
CIE	N1=64 N2=91 N3=98 N4=99 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	99.1%
ϕ_o	0.9%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Trunking Flex 31	Order number: 51RF12MB4BXG5 EAN: 4069025494481	LP number 59302_200
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	477.4	477.4	477.4	477.4	477.4	477.4	477.4	2.9	2.9
5°	479.2	479.4	476.1	476.9	477.7	479.1	480.6	22.8	25.7
10°	478.5	478.8	475.9	476.7	478.1	479.7	481.9	45.5	71.2
15°	473.7	474.6	472.3	472.8	474.3	476.3	478.1	67.3	138.5
20°	463.3	464.4	462.2	462.5	463.5	465.9	467.9	87.0	225.5
25°	446.5	446.1	441.7	442.3	444.6	445.0	446.7	102.9	328.5
30°	417.9	412.9	407.0	410.2	413.2	410.4	409.4	112.7	441.2
35°	373.8	365.6	358.8	365.1	368.4	362.5	359.0	114.6	555.7
40°	307.6	307.1	302.9	303.0	299.1	300.3	301.2	106.7	662.4
45°	238.0	232.2	241.2	229.3	232.4	226.8	239.9	90.5	752.9
50°	179.0	175.4	175.4	172.2	173.6	171.0	175.3	73.1	826.0
55°	127.6	127.0	119.9	124.4	123.4	123.3	117.8	55.4	881.5
60°	86.5	87.3	81.4	85.4	84.1	84.7	79.6	40.0	921.5
65°	57.4	58.2	54.6	57.2	56.0	56.8	53.2	28.0	949.5
70°	37.6	37.8	35.9	37.4	36.6	36.7	34.5	18.9	968.4
75°	23.7	23.8	22.9	23.5	22.9	22.8	21.3	12.2	980.6
80°	13.7	13.5	13.1	13.2	12.8	12.3	11.3	7.0	987.6
85°	6.4	6.2	5.9	5.7	5.2	4.6	4.0	3.0	990.6
90°	2.2	2.1	2.0	1.7	1.4	1.0	0.6	0.9	991.5
95°	1.8	1.7	1.7	1.5	1.2	0.8	0.5	0.7	992.2
100°	2.3	2.3	2.1	1.7	1.3	0.8	0.5	0.9	993.0
105°	2.1	2.1	2.0	1.7	1.3	0.7	0.5	0.8	993.9
110°	2.3	2.3	2.0	1.7	1.2	0.6	0.4	0.8	994.6
115°	2.2	2.1	1.9	1.7	1.1	0.7	0.5	0.7	995.4
120°	2.3	2.0	1.7	1.5	1.1	0.7	0.7	0.7	996.0
125°	2.7	2.1	1.8	1.4	1.0	0.7	0.7	0.7	996.7
130°	2.0	1.9	2.0	1.4	1.1	0.9	0.9	0.6	997.3
135°	2.0	1.9	1.8	1.5	1.2	1.2	1.2	0.6	997.9
140°	2.0	2.0	1.8	1.6	1.4	1.4	1.4	0.6	998.5
145°	2.1	2.0	1.9	1.7	1.6	1.6	1.6	0.6	999.1
150°	2.1	2.1	1.9	1.8	1.8	1.8	1.8	0.5	999.6
155°	1.9	1.9	1.8	1.8	1.8	1.8	1.8	0.4	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Trunking Flex 31	Order number: 51RF12MB4BXG5 EAN: 4069025494481	LP number 59302_200
----------------------------	---	------------------------

UGR-Table	Standard room	siteco								
-----------	---------------	--------	--	--	--	--	--	--	--	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	23.3	24.8	23.6	25.1	25.4	23.3	24.8	23.7	25.2	25.5
	3H	23.7	25.1	24.1	25.4	25.8	23.8	25.2	24.2	25.5	25.9
	4H	23.9	25.1	24.3	25.5	25.9	24.0	25.2	24.4	25.6	26.0
	6H	24.0	25.1	24.4	25.5	25.9	24.1	25.2	24.5	25.6	26.0
	8H	24.1	25.1	24.5	25.5	25.9	24.2	25.2	24.6	25.6	26.0
	12H	24.1	25.0	24.5	25.4	25.9	24.2	25.1	24.6	25.5	25.9
4H	2H	23.5	24.8	23.9	25.1	25.5	23.6	24.8	24.0	25.2	25.6
	3H	24.1	25.2	24.5	25.6	26.0	24.2	25.3	24.6	25.6	26.1
	4H	24.3	25.3	24.8	25.7	26.1	24.4	25.4	24.9	25.8	26.2
	6H	24.5	25.3	25.0	25.7	26.2	24.6	25.4	25.1	25.8	26.3
	8H	24.5	25.3	25.0	25.7	26.2	24.6	25.4	25.1	25.8	26.3
	12H	24.6	25.2	25.1	25.7	26.2	24.7	25.3	25.2	25.8	26.3
8H	4H	24.4	25.1	24.9	25.6	26.1	24.5	25.2	25.0	25.7	26.2
	6H	24.6	25.2	25.1	25.7	26.2	24.7	25.3	25.2	25.8	26.3
	8H	24.7	25.2	25.2	25.7	26.2	24.8	25.3	25.3	25.8	26.3
	12H	24.7	25.2	25.3	25.7	26.2	24.8	25.2	25.3	25.7	26.3
12H	4H	24.4	25.0	24.9	25.5	26.0	24.5	25.1	25.0	25.6	26.1
	6H	24.6	25.1	25.1	25.6	26.1	24.7	25.2	25.2	25.7	26.2
	8H	24.7	25.1	25.2	25.6	26.2	24.8	25.2	25.3	25.7	26.3


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1433 B = 61	H(C0) = 5 H(C90) = 5	H(C180) = 5 H(C270) = 5
-----------------	---------------------------------	-------------------------------	--------------------	-------------------------	----------------------------

C-planes	γ	0° 180°	15°	30°	45°	60°	75°	90° 270°
			165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°	
Luminance in cd/m²								
45°		41134.2	40214.7	42048.7	40443.8	41631.7	41396.6	44713.4
50°		33556.3	32943.9	33213.0	33052.2	33935.8	34189.1	35908.7
55°		26342.2	26278.6	25041.0	26402.0	26771.6	27463.3	27023.6
60°		20042.1	20285.3	19128.9	20449.4	20670.6	21489.0	20933.4
65°		15280.1	15533.2	14788.8	15854.3	16006.7	16871.5	16529.3
70°		11862.7	11992.4	11577.0	12417.0	12631.2	13307.8	13217.0
75°		9285.2	9343.5	9185.3	9802.1	10052.1	10647.4	10756.6
80°		7104.4	7071.4	7056.7	7472.8	7782.9	8201.0	8423.1
85°		5051.3	4925.3	4920.0	5086.9	5265.9	5460.5	5785.6

Photometric test report

Family Trunking Flex 31	Order number: 51RF12MB4BXG5 EAN: 4069025494481	LP number 59302_200
-----------------------------------	---	-------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85°

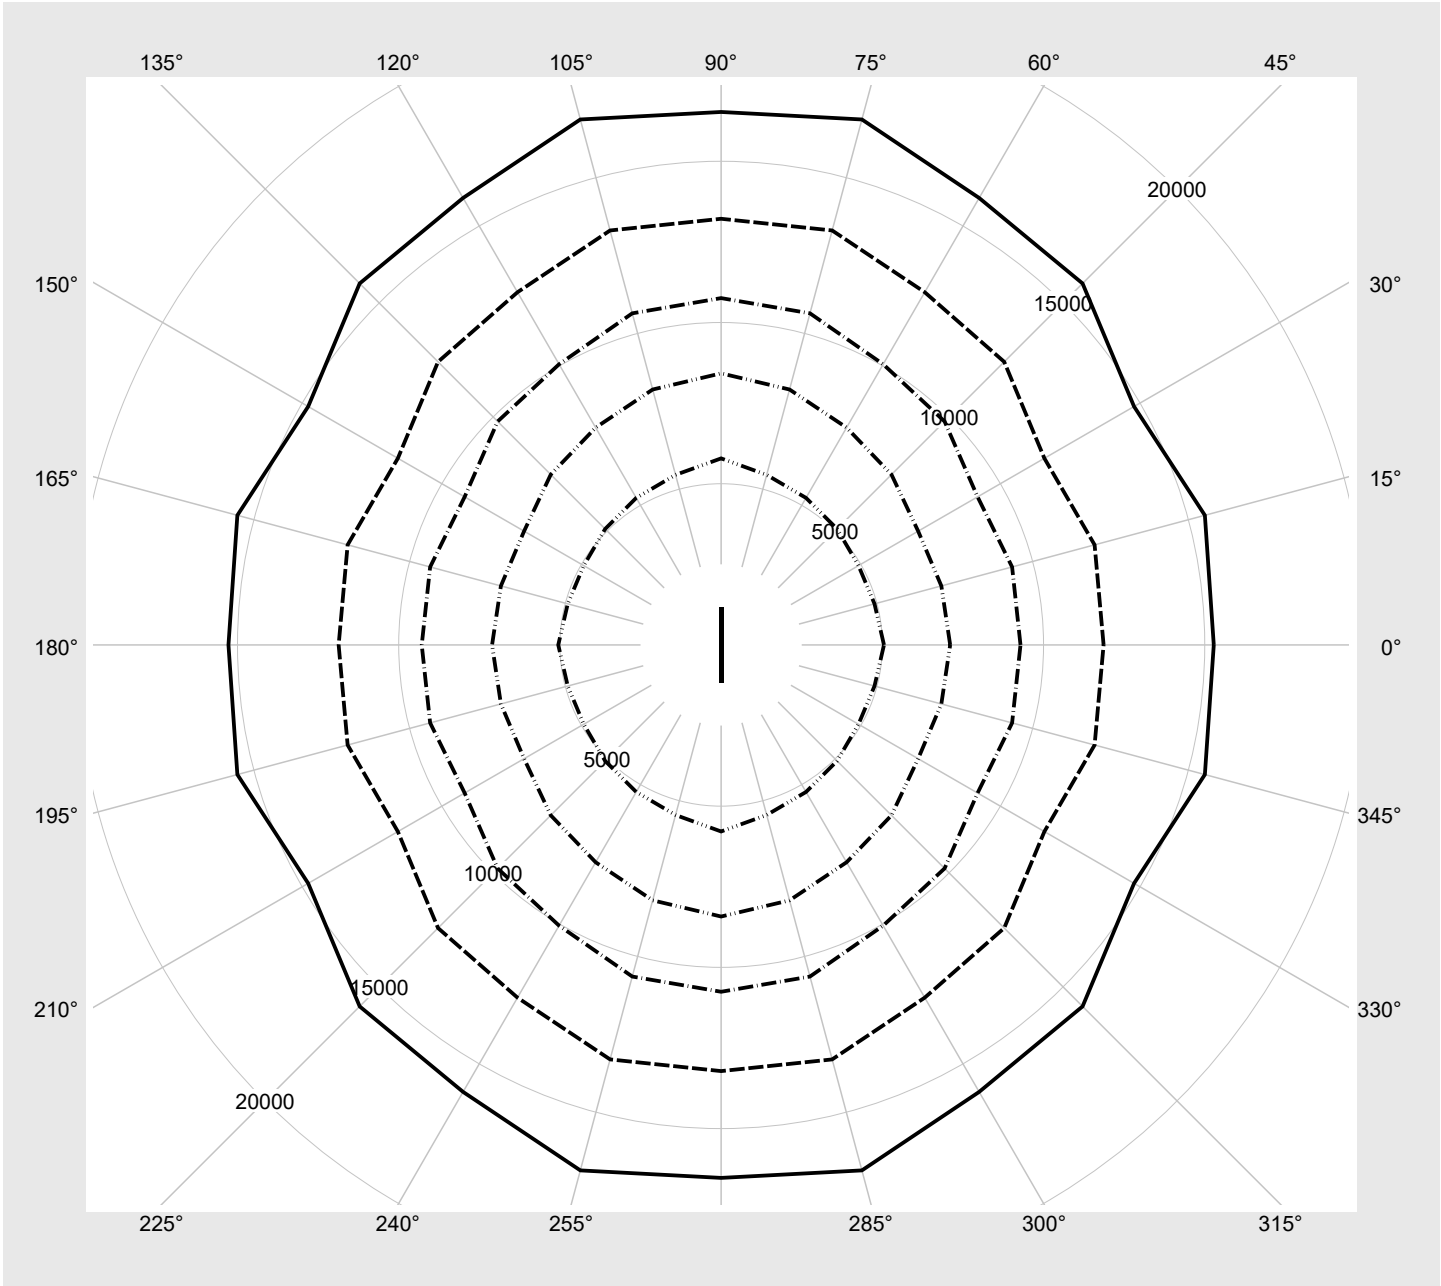

Photometric test report

Family Trunking Flex 31	Order number: 51RF12MB4BXG5 EAN: 4069025494481	LP number 59302_200
-----------------------------------	---	-------------------------------

Multilumen Table	environmental temperature: 25°C	siteco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
14	ON	ON	ON	OFF	11560	65.3
11	ON	OFF	ON	ON	10360	57.9
8	ON	OFF	OFF	OFF	9140	50.4
6	OFF	ON	ON	OFF	8320	45.6
4	OFF	ON	OFF	OFF	7480	40.9
2	OFF	OFF	ON	OFF	6640	36.2