


Photometric test report

Family Modario® 31 	Order number: 53BM811D2V4120 EAN: 4058352498040	LP number 55135_41
	Version diffuser optic, frosted, narrow distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Rated values Net luminous flux = 12350 lm Power consumption = 79.4 W Luminous efficacy = 155.5 lm/W	serial documentation 23.04.2021

Luminous intensity in cd/klm **C180-0** **C270-90** **Imax: 494 cd/klm**

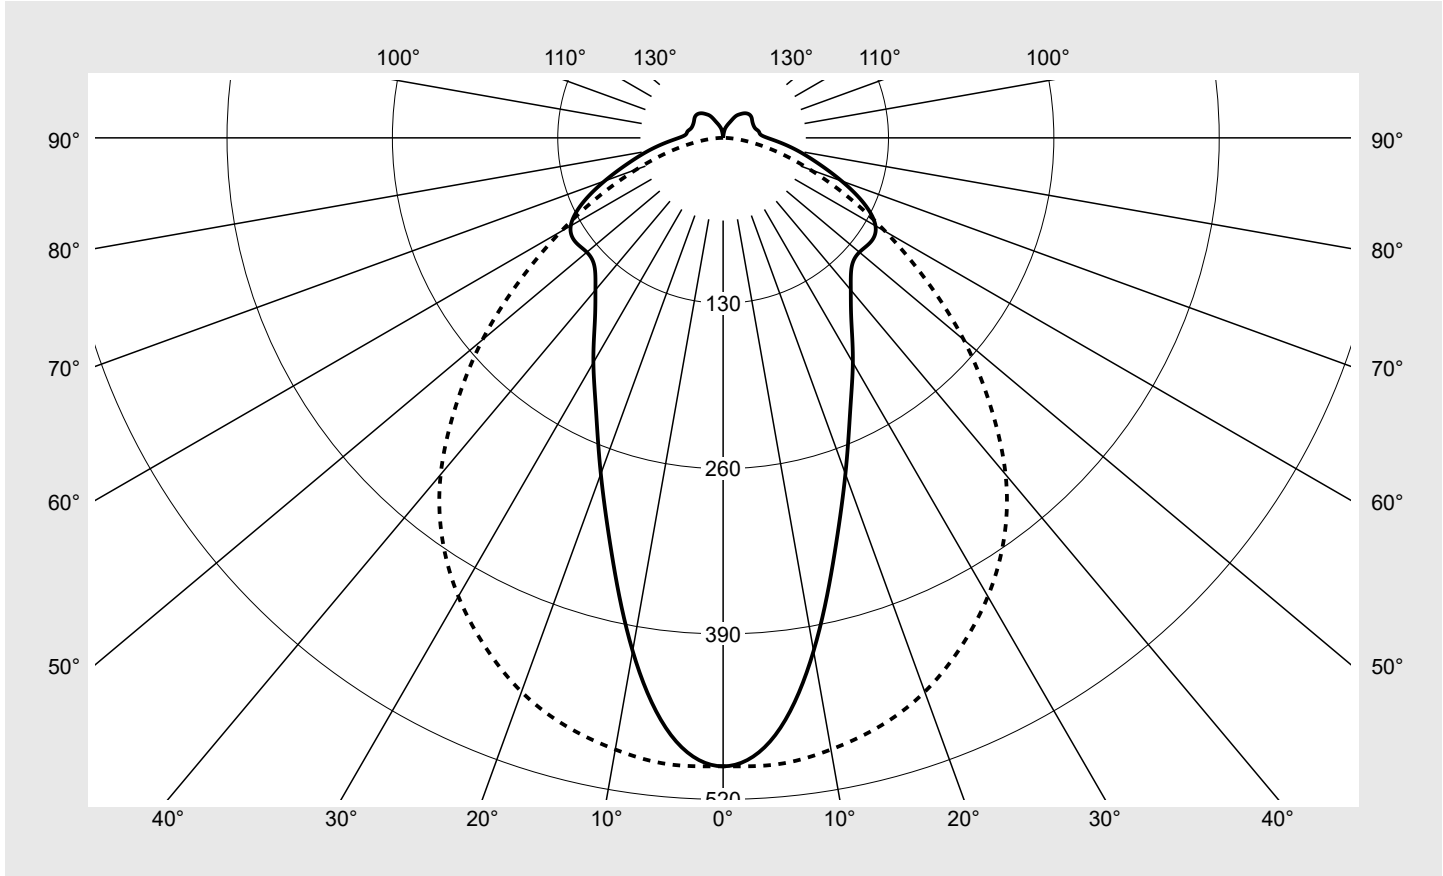

Classifications	
DIN 5040	A 4 1
CIE	N1=52 N2=78 N3=94 N4=90 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	90.2%
ϕ_o	9.8%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Modario® 31	Order number: 53BM811D2V4120 EAN: 4058352498040	LP number 55135_41
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	494.0	494.0	494.0	494.0	494.0	494.0	494.0	3.0	3.0
5°	471.2	473.6	473.3	479.8	487.3	492.3	494.3	23.0	26.0
10°	409.6	413.1	422.7	443.8	464.9	481.7	488.2	42.4	68.4
15°	338.4	347.0	361.1	392.2	430.5	464.3	478.5	56.8	125.2
20°	281.1	287.1	301.8	336.6	388.5	440.1	463.4	66.4	191.7
25°	236.4	241.8	253.6	284.7	341.2	409.5	441.9	72.2	263.9
30°	204.0	206.7	214.9	239.9	293.5	372.6	416.3	74.8	338.7
35°	175.8	178.5	183.2	201.6	247.9	331.0	384.9	74.5	413.2
40°	156.2	156.9	158.1	169.5	206.1	286.5	345.5	72.1	485.3
45°	143.0	142.2	139.6	143.9	170.0	240.3	296.8	68.2	553.5
50°	139.9	136.3	128.9	125.0	140.5	196.1	247.0	64.4	617.9
55°	142.1	137.0	123.8	111.3	116.1	156.4	194.7	60.8	678.8
60°	138.3	133.4	118.4	100.6	96.3	122.2	147.4	56.5	735.2
65°	122.3	118.7	106.2	88.6	78.9	92.2	106.5	49.6	784.8
70°	99.1	96.0	86.4	72.7	62.1	66.2	72.4	40.3	825.1
75°	77.2	75.5	68.2	57.7	47.1	45.1	46.2	31.4	856.5
80°	60.2	58.5	53.3	43.9	33.2	27.4	25.3	23.3	879.8
85°	45.8	44.8	40.6	32.3	22.0	14.3	10.3	16.6	896.3
90°	34.8	33.6	29.7	22.4	13.8	6.0	0.9	11.3	907.6
95°	29.5	28.4	25.0	19.2	12.4	5.6	0.9	9.6	917.2
100°	28.5	27.2	23.5	18.4	12.5	6.1	0.9	9.2	926.4
105°	26.7	25.7	22.5	18.4	13.1	6.4	0.9	8.8	935.2
110°	25.9	24.6	22.5	19.1	13.8	7.0	0.9	8.6	943.9
115°	25.9	24.8	23.2	20.0	14.4	7.5	0.9	8.6	952.4
120°	26.4	25.5	24.2	20.7	14.8	7.0	0.9	8.4	960.8
125°	27.4	26.5	24.8	20.9	14.8	7.1	0.9	8.1	968.9
130°	27.7	26.6	24.5	20.3	14.3	7.1	1.0	7.5	976.4
135°	27.0	25.7	23.3	19.1	12.5	6.9	1.1	6.6	983.0
140°	25.2	23.8	21.4	17.4	10.4	6.1	1.2	5.4	988.4
145°	22.6	21.3	19.1	14.4	8.9	5.1	1.3	4.2	992.6
150°	19.6	18.2	15.5	10.6	7.6	4.0	1.4	3.0	995.6
155°	14.7	13.4	11.5	8.5	6.9	2.9	1.4	2.0	997.6
160°	11.4	10.7	8.5	7.3	5.5	1.6	1.5	1.2	998.9
165°	8.9	8.5	6.6	5.7	3.8	1.5	1.4	0.7	999.6
170°	6.0	4.8	4.2	3.4	1.5	1.4	1.4	0.3	999.9
175°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.1	1000.0
180°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.0	1000.0

Photometric test report

Family Modario® 31	Order number: 53BM811D2V4120 EAN: 4058352498040	LP number 55135_41
------------------------------	--	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	22.0	23.6	22.3	23.9	24.3	23.7	25.3	24.0	25.6	25.9
	3H	24.0	25.5	24.4	25.9	26.2	24.9	26.4	25.3	26.7	27.1
	4H	24.9	26.3	25.2	26.6	27.0	25.4	26.8	25.8	27.1	27.5
	6H	25.6	26.9	26.0	27.2	27.6	25.7	27.0	26.1	27.3	27.7
	8H	25.9	27.1	26.3	27.5	27.9	25.8	27.0	26.3	27.4	27.8
	12H	26.2	27.3	26.6	27.7	28.1	25.9	27.0	26.3	27.4	27.8
4H	2H	22.6	24.0	23.0	24.4	24.8	24.0	25.4	24.4	25.7	26.1
	3H	24.9	26.1	25.3	26.5	26.9	25.4	26.6	25.8	26.9	27.3
	4H	25.8	26.9	26.3	27.3	27.8	25.9	27.0	26.4	27.4	27.8
	6H	26.7	27.6	27.1	28.1	28.5	26.3	27.3	26.8	27.7	28.2
	8H	27.1	28.0	27.6	28.4	28.9	26.5	27.4	27.0	27.8	28.3
	12H	27.5	28.2	27.9	28.7	29.2	26.6	27.4	27.1	27.8	28.3
8H	4H	26.1	27.0	26.6	27.4	27.9	26.2	27.1	26.7	27.5	28.0
	6H	27.2	27.9	27.7	28.4	28.9	26.7	27.5	27.2	27.9	28.4
	8H	27.7	28.3	28.2	28.8	29.3	26.9	27.6	27.4	28.1	28.6
	12H	28.2	28.7	28.7	29.2	29.8	27.1	27.6	27.6	28.1	28.7
12H	4H	26.2	26.9	26.7	27.4	27.9	26.3	27.0	26.7	27.5	28.0
	6H	27.3	27.9	27.8	28.4	28.9	26.8	27.5	27.3	28.0	28.5
	8H	27.8	28.4	28.3	28.9	29.4	27.1	27.6	27.6	28.1	28.7


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1476	H(C0) = 25	H(C180) = 25
			B = 75	H(C90) = 0	H(C270) = 0

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		16922.9	16967.4	17095.6	18372.4	22995.8	34907.6	46831.1	
50°		17372.2	17099.9	16646.9	16934.8	20341.3	30865.3	42860.9	
55°		18719.6	18257.1	17046.0	16193.7	18246.1	27086.7	37860.4	
60°		19565.2	19102.0	17607.0	15935.5	16667.5	23714.3	32893.4	
65°		18826.7	18542.2	17310.9	15529.9	15347.4	20529.6	28106.2	
70°		16867.1	16620.6	15718.8	14399.6	13890.9	17467.6	23626.4	
75°		14831.8	14778.6	14156.1	13227.1	12516.2	14705.4	19934.1	
80°		13381.3	13288.9	12985.2	12057.5	10970.6	11812.8	16243.4	
85°		12177.9	12257.8	12100.6	11196.4	9674.1	9231.1	13190.8	

Photometric test report

Family Modario® 31	Order number: 53BM811D2V4120 EAN: 4058352498040	LP number 55135_41
-------------------------------------	--	-------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

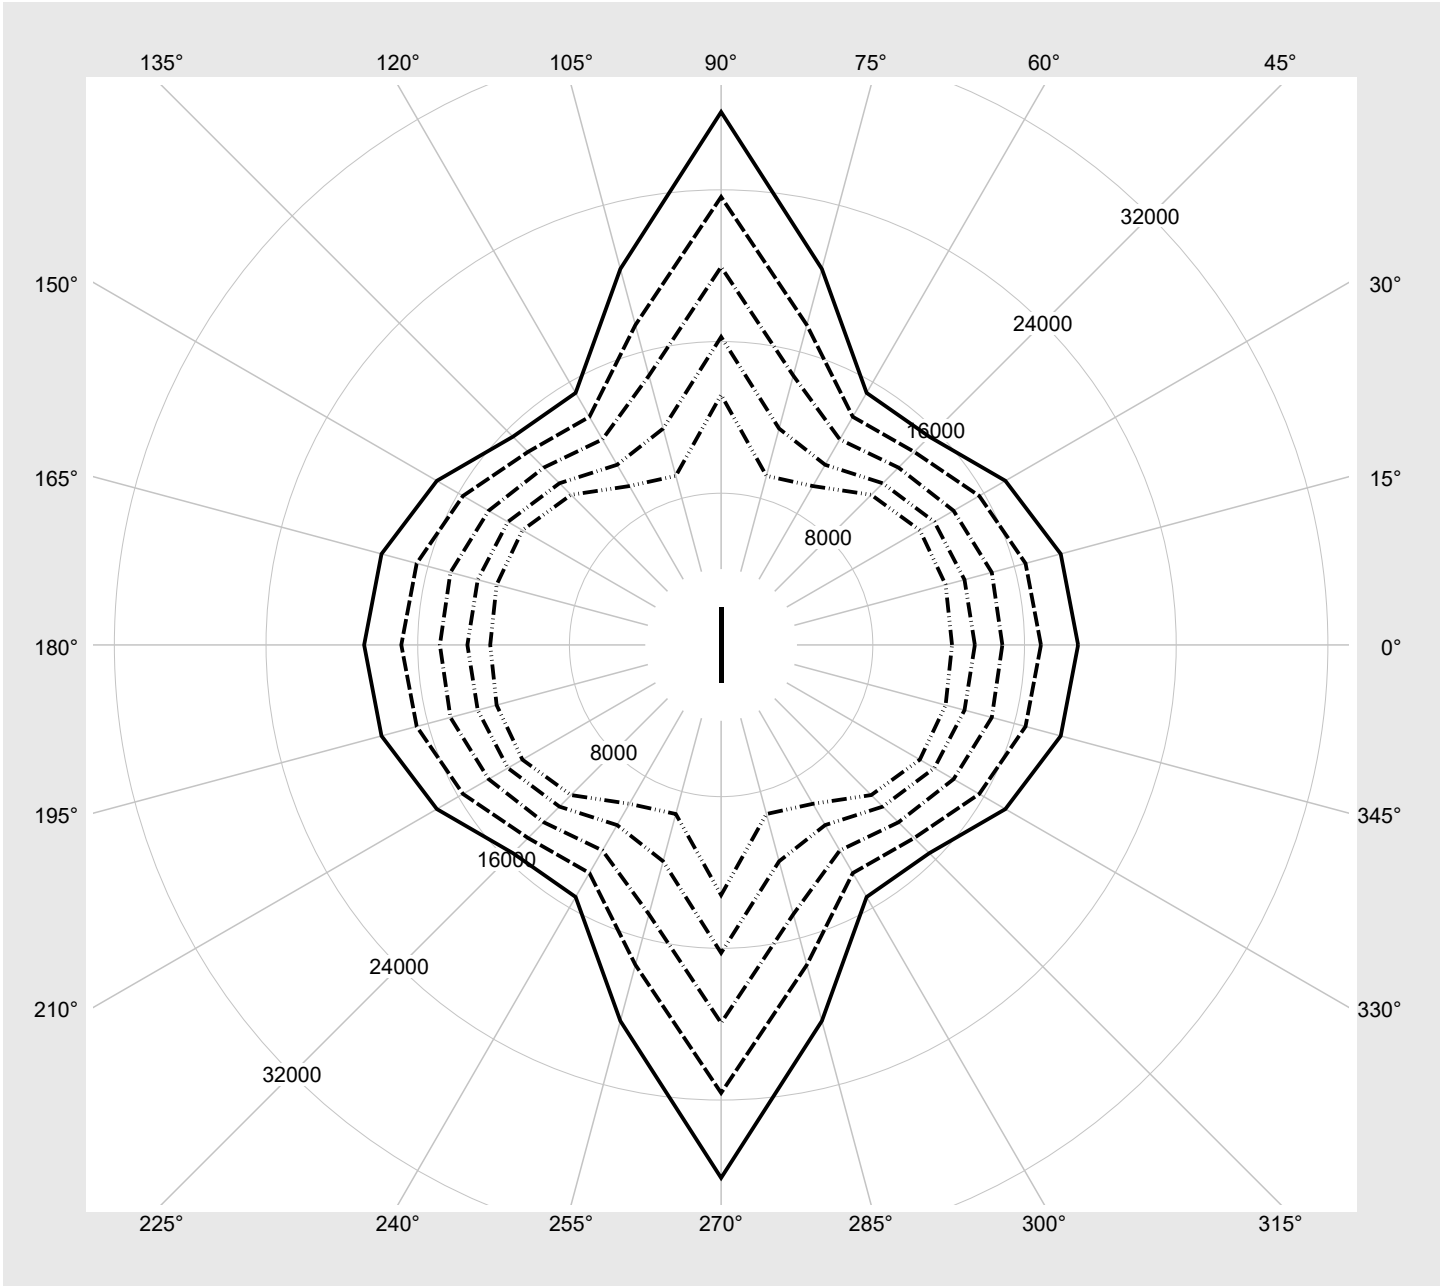

Photometric test report

Family Modario® 31	Order number: 53BM811D2V4120 EAN: 4058352498040	LP number 55135_41
------------------------------	--	------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	12350	79.5
95	239	252	11713	74.7
90	225	250	11101	70.1
85	211	247	10482	65.7
80	198	245	9899	61.6
75	184	242	9262	57.3
70	171	240	8648	53.2
65	158	237	8034	49.2
60	145	233	7413	45.2
55	132	230	6781	41.3
50	120	227	6188	37.6
45	107	222	5543	33.7
40	95	218	4937	30.2
35	83	213	4324	26.6
30	71	207	3702	23.0
25	59	201	3085	19.6
20	47	192	2458	16.1
15	36	182	1877	12.9
10	24	168	1240	9.4
5	12	142	603	6.0
3	7	122	343	4.5