




Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3G41F08ME EAN: 4058352559321	LP number 58294_97												
	<table border="0"> <tr> <td>Version</td> <td>post-top or side-entry mounting</td> </tr> <tr> <td>Optic</td> <td>asymmetric, wide distribution with additional light component for rear paths (ST1.2P1.0)</td> </tr> <tr> <td>Cover</td> <td>transparent, PMMA</td> </tr> <tr> <td>Lamps</td> <td>LED 4000 K CRI ≥ 70</td> </tr> <tr> <td>Controlgear</td> <td>ECG SITECO iQ</td> </tr> <tr> <td>Rated values</td> <td> Net luminous flux = 18520 lm Power consumption = 124.7 W Luminous efficacy = 148.5 lm/W </td> </tr> </table>	Version	post-top or side-entry mounting	Optic	asymmetric, wide distribution with additional light component for rear paths (ST1.2P1.0)	Cover	transparent, PMMA	Lamps	LED 4000 K CRI ≥ 70	Controlgear	ECG SITECO iQ	Rated values	Net luminous flux = 18520 lm Power consumption = 124.7 W Luminous efficacy = 148.5 lm/W	serial documentation 11.02.2022 
Version	post-top or side-entry mounting													
Optic	asymmetric, wide distribution with additional light component for rear paths (ST1.2P1.0)													
Cover	transparent, PMMA													
Lamps	LED 4000 K CRI ≥ 70													
Controlgear	ECG SITECO iQ													
Rated values	Net luminous flux = 18520 lm Power consumption = 124.7 W Luminous efficacy = 148.5 lm/W													

Luminous intensity in cd/klm **C180-0** **C205-25** **C210-30** **C270-90** **Imax: 514 cd/klm**

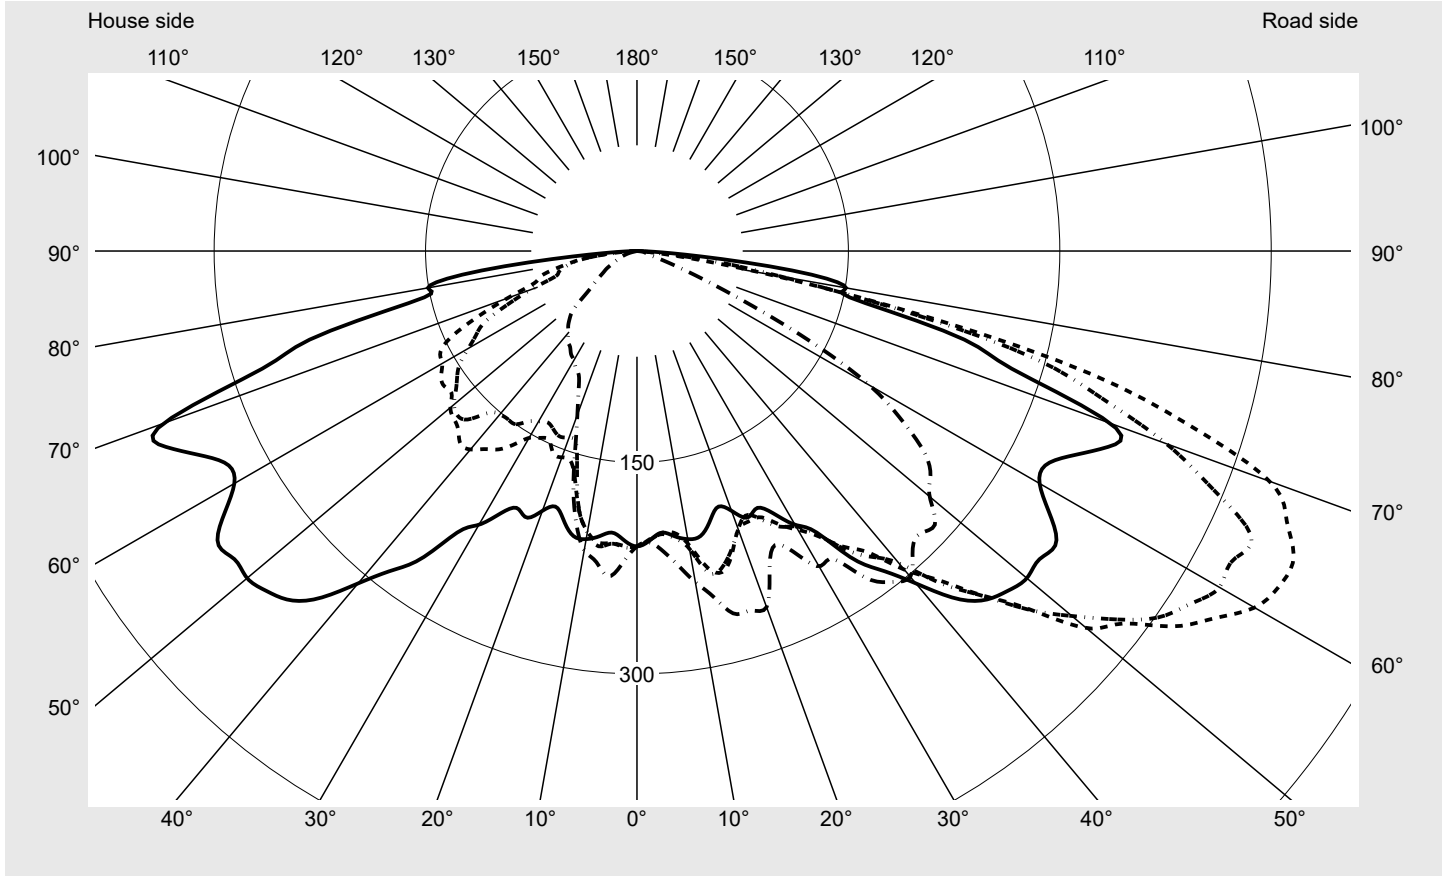

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	477.9
Imax 80°	150.6
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3G41F08ME EAN: 4058352559321	LP number 58294_97
--	--	------------------------------

Envelope curve in cd/klm **KMK 62.5°** **KMK 60°** **KMK 57.5°** **KMK 55°** **siteco**

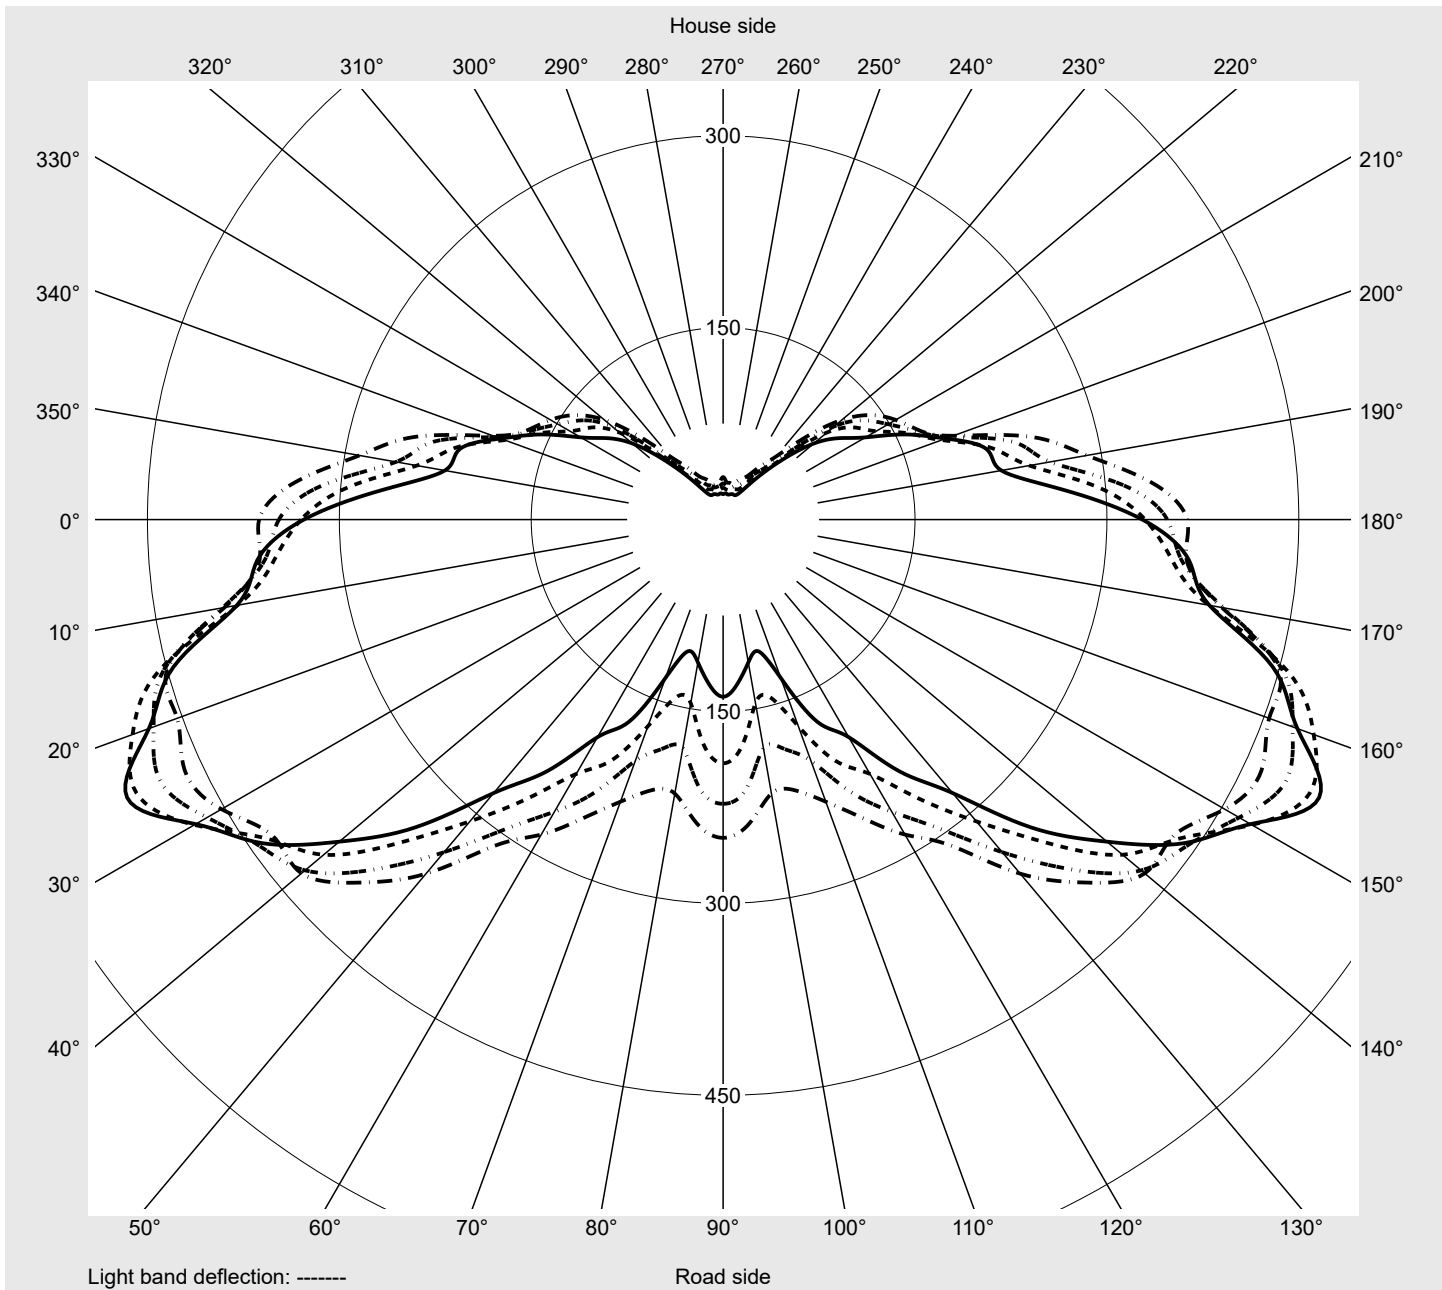

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3G41F08ME EAN: 4058352559321	LP number 58294_97
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6
2,5°	205.6	205.7	205.1	204.9	205.0	204.7	205.4	206.0	205.3	204.4	203.8	203.2	203.2
5,0°	200.6	200.0	200.2	201.0	201.0	200.8	201.6	203.7	204.4	207.0	208.6	208.8	209.5
7,5°	204.1	204.0	201.6	200.1	200.5	201.7	205.6	211.5	213.9	215.7	216.6	218.7	220.9
10,0°	207.6	209.2	209.7	209.8	209.4	211.5	214.5	217.2	219.6	222.1	226.6	230.1	232.8
12,5°	207.3	213.8	219.7	222.4	226.4	229.8	233.4	232.9	229.9	232.2	233.3	236.0	235.0
15,0°	199.0	200.3	211.5	229.6	237.5	235.5	232.7	228.6	224.1	226.5	229.3	229.9	235.7
17,5°	190.4	197.3	210.2	222.7	225.6	224.7	222.5	217.1	223.5	219.7	214.6	212.5	217.6
20,0°	196.1	203.0	207.3	214.6	213.8	210.1	210.1	216.7	224.8	216.2	208.8	208.6	214.3
22,5°	204.7	210.2	206.9	215.4	212.0	207.6	202.9	210.8	212.9	212.7	211.4	211.9	212.6
25,0°	201.2	207.7	211.1	218.3	214.4	208.4	210.5	217.3	217.4	220.3	221.0	220.3	222.0
27,5°	210.0	215.2	216.1	218.3	219.0	218.7	220.5	224.0	230.0	232.2	238.2	239.3	248.8
30,0°	224.2	230.6	232.5	231.7	231.8	228.4	225.6	229.7	241.6	250.9	258.1	265.1	275.3
32,5°	236.4	239.9	242.1	243.2	242.8	240.1	238.5	242.0	259.4	270.0	276.8	284.1	289.7
35,0°	266.1	266.9	261.8	256.5	252.6	256.3	258.8	263.1	271.7	283.6	290.8	306.4	310.7
37,5°	285.6	282.4	281.9	272.6	261.9	269.5	273.5	280.9	289.8	295.2	309.0	335.0	331.2
40,0°	307.8	307.6	298.3	291.3	284.3	295.0	289.2	296.4	304.1	319.2	325.8	343.3	347.7
42,5°	334.2	326.4	325.3	318.4	314.5	316.6	320.2	318.3	317.8	333.8	340.8	351.7	353.4
45,0°	349.9	346.2	344.7	343.7	341.8	345.2	345.6	339.4	342.9	358.9	350.5	347.1	349.5
47,5°	356.8	353.9	367.5	388.9	362.0	375.2	376.5	367.6	369.2	367.0	359.1	339.7	345.5
50,0°	361.1	368.7	382.5	428.7	381.0	416.2	402.8	390.6	393.2	377.3	353.6	334.3	323.6
52,5°	359.6	357.8	391.5	430.5	422.3	434.1	429.4	415.4	416.5	391.3	357.8	320.9	299.8
55,0°	362.7	363.8	395.8	449.4	454.2	464.3	452.8	430.3	430.2	401.3	361.3	311.3	284.3
57,5°	347.2	359.5	397.5	452.4	473.7	485.1	465.8	443.6	426.6	387.0	339.4	294.9	263.7
60,0°	329.9	351.7	385.3	456.5	491.3	506.0	477.3	434.9	407.6	357.1	307.9	266.0	229.6
62,5°	327.7	365.6	386.0	444.8	477.7	514.1	476.0	440.8	391.7	340.2	279.0	240.2	196.4
65,0°	342.5	392.5	389.2	425.5	456.9	514.1	481.3	416.2	364.1	317.6	257.1	222.8	161.8
67,5°	362.5	436.1	382.5	401.8	447.8	498.9	442.9	393.8	331.6	288.5	228.0	195.2	143.3
70,0°	357.4	420.3	359.9	368.3	453.9	477.9	399.8	347.8	309.6	257.3	197.9	158.9	124.3
72,5°	280.3	372.1	312.1	330.4	401.3	410.8	344.5	287.0	267.7	217.5	167.3	129.5	110.8
75,0°	237.1	318.5	240.6	282.1	301.1	327.3	288.7	220.4	187.0	164.0	134.5	116.5	98.1
77,5°	158.0	221.9	166.9	207.0	172.4	196.4	186.9	147.0	122.7	116.0	90.3	82.7	70.0
80,0°	150.6	123.0	102.1	123.8	86.4	93.9	102.8	105.1	85.9	78.7	44.1	38.5	30.3
82,5°	120.2	63.8	40.9	40.4	26.6	34.2	53.9	70.5	52.4	35.3	21.3	16.9	11.9
85,0°	49.4	23.6	13.4	9.2	7.5	9.3	11.5	16.7	14.6	10.6	10.4	8.0	6.3
87,5°	11.8	8.1	5.5	4.8	4.2	4.6	4.8	5.1	5.3	4.8	4.2	4.0	3.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3G41F08ME EAN: 4058352559321	LP number 58294_97
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6
2,5°	203.1	203.0	204.6	205.3	206.0	206.9	205.5	206.6	207.7	208.7	209.5	210.3	210.8
5,0°	209.5	210.0	210.5	212.3	214.2	213.9	201.5	202.7	202.5	204.3	208.1	208.4	207.5
7,5°	222.3	225.1	226.3	226.7	226.6	225.1	204.0	203.4	204.4	205.7	208.7	211.2	210.9
10,0°	232.0	231.2	232.4	233.6	235.5	238.6	202.7	201.4	201.3	202.7	202.3	202.6	205.2
12,5°	238.9	241.7	245.2	248.7	252.4	251.4	199.3	198.0	192.9	190.6	189.2	189.1	189.2
15,0°	236.9	243.3	249.4	258.1	262.3	266.4	194.4	191.9	184.6	178.8	169.3	164.2	160.6
17,5°	229.2	238.9	247.9	257.1	263.7	267.5	189.4	185.9	180.3	171.1	156.3	143.4	139.0
20,0°	221.0	231.2	243.0	255.2	265.6	268.8	191.0	182.0	174.2	167.5	155.8	140.7	134.8
22,5°	221.6	232.4	245.3	250.3	249.5	245.8	191.4	178.6	167.4	160.1	155.3	142.5	129.7
25,0°	228.0	237.5	241.9	238.9	237.8	230.6	192.1	174.4	168.7	155.9	147.8	139.9	126.5
27,5°	249.4	250.2	249.0	248.4	241.2	240.7	196.6	184.1	170.0	160.9	149.5	137.1	126.3
30,0°	274.3	269.2	254.3	256.1	254.8	258.3	216.4	204.4	186.6	170.7	153.1	139.5	127.1
32,5°	284.4	271.3	265.0	270.9	265.3	259.0	230.9	220.2	200.6	179.6	162.9	143.3	130.1
35,0°	305.2	293.7	290.6	292.2	285.6	283.0	265.8	250.6	220.5	193.1	171.9	150.0	132.3
37,5°	319.7	309.7	294.0	286.7	287.8	296.0	285.3	272.2	235.5	205.4	177.1	150.4	133.1
40,0°	337.7	321.9	291.1	275.9	284.7	301.7	313.3	292.7	247.2	217.3	183.8	151.3	139.1
42,5°	348.9	316.1	291.3	275.9	286.3	289.4	326.8	308.0	255.6	226.7	185.4	155.6	143.3
45,0°	352.6	315.7	285.9	274.4	284.0	283.7	347.3	328.5	269.4	236.2	179.4	168.9	149.4
47,5°	346.6	306.7	270.7	272.1	287.2	286.8	361.2	325.8	276.9	229.4	176.2	172.7	157.7
50,0°	323.6	284.0	254.7	255.4	280.5	271.1	358.8	318.5	269.0	216.6	172.8	169.4	157.1
52,5°	288.6	264.3	237.6	247.2	255.4	262.4	346.6	305.4	258.6	200.4	165.8	161.9	149.4
55,0°	257.2	234.7	219.2	217.5	238.2	248.8	335.7	288.7	249.7	191.5	167.0	155.8	142.3
57,5°	234.4	200.7	185.7	181.4	210.8	222.2	313.1	259.6	234.8	188.7	164.8	149.0	135.2
60,0°	208.2	171.9	144.2	145.7	176.3	190.5	293.5	243.1	216.8	181.7	159.6	138.1	125.5
62,5°	174.5	131.7	106.6	113.4	128.8	138.5	266.9	220.9	213.1	185.2	157.4	128.5	111.0
65,0°	137.2	94.0	76.8	79.0	87.3	81.9	252.2	222.4	206.5	180.2	146.4	119.0	100.4
67,5°	107.2	66.9	52.5	43.4	43.5	43.9	242.0	221.7	206.9	161.7	123.0	99.6	85.2
70,0°	90.4	52.1	32.8	21.8	21.0	21.8	214.0	256.9	208.7	129.3	97.7	80.3	74.0
72,5°	76.2	30.7	18.8	12.2	11.0	10.5	204.4	243.7	153.8	99.0	76.8	61.5	58.7
75,0°	60.2	19.9	12.8	9.5	8.5	8.3	180.0	179.3	126.0	89.8	71.5	57.5	49.9
77,5°	25.1	13.9	9.2	7.5	7.0	6.6	142.6	126.0	117.7	76.6	60.8	52.4	41.5
80,0°	13.4	9.4	6.7	5.7	5.4	5.4	107.1	124.7	99.0	59.9	47.4	45.6	27.2
82,5°	8.6	6.4	4.8	4.1	4.1	4.3	61.7	98.1	69.3	43.9	35.9	33.0	21.7
85,0°	5.2	4.0	3.0	2.6	2.2	2.2	35.4	45.5	27.0	19.3	18.2	15.9	11.8
87,5°	2.9	2.2	1.6	1.3	1.0	1.0	11.6	11.8	8.3	5.6	5.7	5.8	3.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3G41F08ME EAN: 4058352559321	LP number 58294_97
Table of values for luminous intensities		Maximum luminous intensity
		sITeCO

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	209.6	0.3	0.3
2,5°	212.0	213.1	214.4	216.5	219.1	220.0	220.3	220.4	221.1	221.3	220.8	2.5	2.8
5,0°	207.3	208.6	210.0	212.4	215.2	220.1	224.3	228.1	230.5	232.3	231.7	5.0	7.8
7,5°	207.1	207.6	207.9	208.0	210.6	214.3	217.8	219.4	220.6	222.9	222.3	7.6	15.4
10,0°	201.9	197.4	196.1	197.8	200.7	203.1	205.8	209.1	213.9	215.2	215.6	10.1	25.6
12,5°	188.7	186.8	187.2	188.9	189.0	192.0	194.9	202.2	202.9	199.9	198.5	12.7	38.2
15,0°	163.2	166.1	166.8	168.0	167.6	169.0	171.8	175.5	177.6	177.5	174.3	14.5	52.7
17,5°	142.4	145.3	148.6	146.6	142.2	141.3	142.5	140.5	139.6	141.9	145.2	15.7	68.4
20,0°	132.1	133.9	136.1	131.7	126.2	120.3	118.7	117.2	119.3	123.0	123.6	17.1	85.4
22,5°	121.6	123.3	127.5	122.6	117.2	111.3	108.1	104.4	104.1	105.1	108.4	18.6	104.0
25,0°	116.4	116.4	122.3	114.9	111.8	108.8	104.8	99.9	98.0	96.3	97.5	20.4	124.4
27,5°	113.5	110.4	106.0	104.2	104.7	100.3	99.3	95.7	92.3	93.2	93.9	22.8	147.2
30,0°	118.2	110.9	106.7	103.5	94.1	91.0	88.4	87.2	88.7	89.6	89.4	25.8	173.0
32,5°	121.5	114.0	109.5	100.2	88.8	83.6	80.0	80.0	84.3	86.3	87.0	28.8	201.9
35,0°	128.0	116.1	107.5	90.6	81.0	75.6	72.2	73.3	78.1	83.0	82.8	32.7	234.6
37,5°	127.5	116.2	104.9	90.3	73.2	71.2	67.5	68.7	74.1	79.7	80.7	36.1	270.7
40,0°	131.4	114.2	99.6	87.6	68.0	64.4	63.9	66.0	70.0	75.2	75.7	39.6	310.3
42,5°	134.7	114.2	96.0	77.4	69.2	62.4	60.4	61.5	65.2	69.3	72.3	43.1	353.4
45,0°	137.7	114.0	90.2	69.6	65.6	62.2	54.8	55.1	57.7	63.4	67.4	46.5	400.0
47,5°	135.7	108.6	82.1	66.4	62.0	58.8	49.4	45.7	48.7	56.3	60.7	49.4	449.4
50,0°	128.4	106.2	77.5	63.1	56.8	52.0	46.1	38.7	40.5	45.7	47.2	51.3	500.6
52,5°	126.2	101.8	73.6	57.3	47.5	43.0	38.5	34.1	34.3	36.5	39.1	52.3	552.9
55,0°	121.3	90.9	64.3	50.8	40.1	35.5	32.1	28.8	29.1	29.6	33.2	53.2	606.0
57,5°	113.2	77.9	54.8	44.2	35.4	30.0	28.4	26.1	26.1	26.7	28.2	52.6	658.6
60,0°	105.8	72.5	47.5	38.0	29.4	26.0	25.2	23.4	23.3	23.8	24.7	51.0	709.6
62,5°	92.5	67.2	45.6	30.4	23.1	21.1	21.2	20.4	20.0	20.6	19.9	49.0	758.6
65,0°	79.4	59.7	44.2	23.4	17.5	17.2	17.8	16.9	17.4	17.0	16.6	46.9	805.5
67,5°	69.4	52.0	33.4	16.8	12.4	12.9	14.2	13.4	14.0	14.0	13.3	44.2	849.8
70,0°	61.2	45.1	26.0	12.9	9.9	9.5	10.2	10.0	10.9	11.8	11.2	41.0	890.8
72,5°	54.5	37.0	17.5	9.7	7.6	7.4	7.3	7.4	7.9	9.1	8.6	35.2	926.1
75,0°	37.2	22.5	10.7	7.7	6.2	6.0	5.5	5.7	5.5	6.1	6.1	28.7	954.8
77,5°	24.6	13.7	8.0	6.1	4.8	4.3	4.0	3.9	3.0	2.8	2.6	20.1	974.8
80,0°	17.5	8.2	5.8	4.7	3.7	3.1	2.8	2.2	1.3	0.9	0.7	13.3	988.1
82,5°	13.4	6.6	4.4	3.5	2.9	2.2	1.8	1.6	0.9	0.4	0.5	7.7	995.8
85,0°	6.1	3.6	3.0	2.3	2.0	1.6	1.0	0.8	0.6	0.3	0.3	3.1	998.9
87,5°	2.8	2.2	1.6	1.3	1.1	0.9	0.7	0.6	0.4	0.3	0.3	1.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3G41F08ME EAN: 4058352559321	LP number 58294_97
--	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	18520	124.7	132.2	128.4
95	241	252	17572	117.0	124.0	120.5
90	229	250	16697	110.1	116.7	113.4
85	216	248	15749	102.8	109.0	105.9
80	203	246	14801	95.8	101.5	98.6
75	190	243	13854	88.9	94.1	91.5
70	178	241	12979	82.6	87.5	85.0
65	165	238	12031	76.0	80.5	78.2
60	152	235	11083	69.5	73.6	71.6
55	140	232	10208	63.7	67.4	65.6
50	127	229	9260	57.4	60.7	59.0
45	114	225	8312	51.1	54.1	52.6
40	102	221	7437	45.5	48.2	46.8
35	89	216	6489	39.6	41.8	40.7
30	76	210	5541	33.7	35.6	34.7
25	63	203	4594	28.0	29.5	28.8
20	51	195	3719	22.8	24.0	23.4
15	38	184	2771	17.2	18.1	17.6
13	33	179	2406	15.2	16.0	15.6