

## Photometric test report

Family  
Silica® 21



Order number: 51MX33TAT7B  
EAN: 4058352685563

LP number  
59332\_57

**Version** Suspended luminaire, with homogeneous illumination, prismatic cover, direct-/ indirect distribution, extremely wide distribution,  $UGR \leq 16$  ( $L65 \leq 3000 \text{ cd/m}^2$ ), tunable white

**Lamps** LED 4000 K | CRI  $\geq 80$

**Controlgear** ECG-DALI

**Setting** factory setting

**Rated values** Net luminous flux = 5740 lm  
Power consumption = 56.5 W  
Luminous efficacy = 101.6 lm/W

serial  
documentation  
03.05.2023


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 358 cd/klm

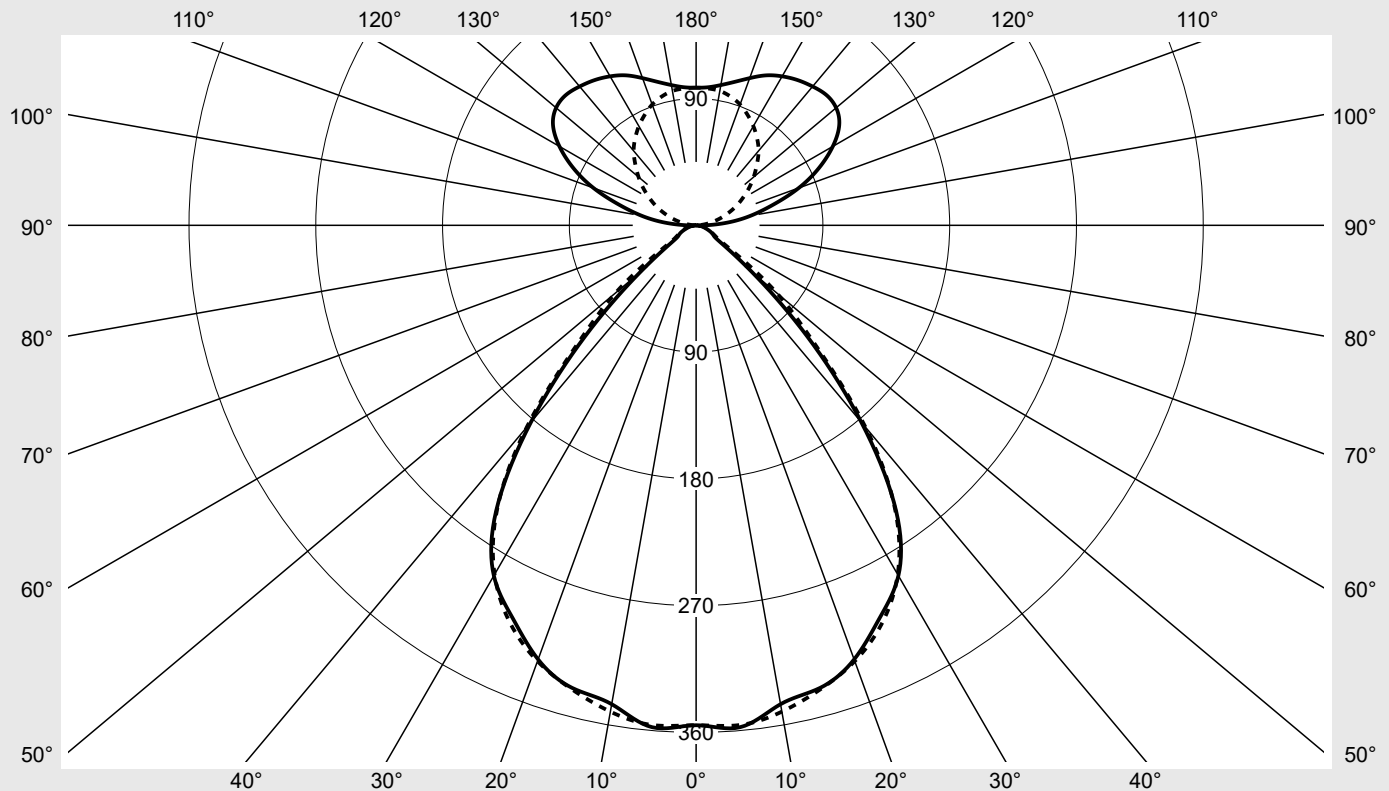

#### Classifications

DIN 5040 C 6 2  
CIE N1=78 N2=96 N3=99  
N4=56 N5=100

#### Luminaire light output ratios

$\eta_{LB}$  100.0%  
 $\phi_u$  56.2%  
 $\phi_o$  43.8%

#### Measurement conditions

DIN EN 13032 and DIN 5032

## Photometric test report

Family <b>Silica® 21</b>	Order number: <b>51MX33TAT7B</b> EAN: <b>4058352685563</b>	LP number <b>59332_57</b>
Table of values for luminous intensities		Maximum luminous intensity
		<b>siteco</b>

C-planes $\gamma$	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	354.9	354.9	354.9	354.9	354.9	354.9	354.9	2.1	2.1
5°	357.6	358.3	358.1	358.3	357.8	357.0	356.1	17.1	19.2
10°	345.2	344.3	344.5	346.4	350.1	350.3	350.6	33.1	52.3
15°	340.0	338.8	336.2	336.1	338.1	341.2	341.0	48.0	100.3
20°	328.0	327.2	323.2	324.1	322.5	324.8	329.3	60.9	161.2
25°	307.9	308.7	306.4	306.5	306.8	306.6	312.0	71.2	232.5
30°	287.2	287.0	283.4	284.9	285.2	284.2	286.2	78.2	310.6
35°	247.5	247.0	244.6	246.0	246.7	245.6	246.4	77.4	388.0
40°	182.5	182.1	183.5	184.7	186.1	185.9	187.0	65.0	453.0
45°	111.7	111.4	112.8	114.1	115.4	116.9	119.1	44.3	497.3
50°	52.4	60.7	68.3	62.5	56.3	66.9	74.7	26.5	523.8
55°	21.3	28.6	27.1	30.9	23.3	32.2	30.0	12.6	536.4
60°	14.3	14.9	15.7	14.6	14.6	15.6	16.3	7.2	543.6
65°	11.8	11.7	12.2	11.9	12.4	12.3	12.4	6.0	549.6
70°	8.5	8.7	9.0	9.0	9.2	9.3	9.8	4.7	554.2
75°	5.9	6.2	6.8	6.5	6.6	7.0	7.1	3.5	557.7
80°	3.6	3.8	4.2	4.6	4.2	4.7	4.8	2.3	560.0
85°	1.8	1.8	1.8	2.1	2.2	2.6	2.7	1.2	561.2
90°	6.2	6.0	6.3	6.0	3.5	1.2	0.4	2.4	563.6
95°	22.4	22.9	24.7	23.8	15.7	8.2	4.2	9.9	573.5
100°	39.4	40.6	41.5	37.2	25.7	14.7	9.7	16.6	590.1
105°	56.7	58.1	58.0	51.0	35.4	22.2	16.2	23.0	613.1
110°	77.6	78.3	74.6	63.1	45.4	29.8	23.1	29.3	642.4
115°	96.2	95.7	89.3	74.3	55.1	37.6	30.6	34.4	676.8
120°	112.0	110.6	101.9	83.7	64.3	45.2	37.9	38.0	714.8
125°	124.0	121.0	110.5	92.7	72.3	52.4	45.6	39.9	754.8
130°	129.8	127.1	115.2	98.2	78.4	59.6	53.3	39.9	794.7
135°	130.8	128.1	117.0	101.7	82.9	66.3	61.0	38.2	832.9
140°	128.7	126.6	117.2	103.9	86.2	72.4	69.0	35.5	868.4
145°	125.8	124.5	116.6	104.5	89.3	78.0	75.4	32.1	900.6
150°	122.1	121.5	114.3	103.4	91.6	83.4	81.3	28.1	928.7
155°	117.5	116.9	110.1	102.0	93.3	88.1	86.5	23.6	952.4
160°	111.2	110.8	105.7	100.5	94.8	91.7	91.2	18.9	971.3
165°	105.4	104.8	102.1	98.7	96.3	94.6	94.6	14.1	985.4
170°	101.1	100.5	99.8	98.3	97.2	96.9	96.9	9.4	994.7
175°	98.4	98.3	97.7	97.5	97.5	97.5	97.5	4.7	999.4
180°	97.7	97.7	97.7	97.7	97.7	97.7	97.7	0.6	1000.0

## Photometric test report

Family <b>Silica® 21</b>	Order number: <b>51MX33TAT7B</b> EAN: <b>4058352685563</b>	LP number <b>59332_57</b>
-----------------------------	---	------------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	15.4	16.3	16.3	17.2	18.3	15.6	16.5	16.5	17.4	18.5
	3H	15.3	16.1	16.2	17.0	18.1	15.6	16.4	16.5	17.3	18.4
	4H	15.3	16.0	16.2	16.9	18.1	15.6	16.3	16.5	17.2	18.4
	6H	15.2	15.8	16.1	16.8	17.9	15.6	16.2	16.5	17.1	18.3
	8H	15.1	15.7	16.1	16.7	17.9	15.5	16.0	16.4	17.0	18.2
	12H	15.0	15.6	16.0	16.5	17.8	15.5	16.0	16.4	17.0	18.2
4H	2H	15.2	15.9	16.1	16.8	17.9	15.3	16.0	16.2	16.9	18.1
	3H	15.2	15.8	16.1	16.7	17.9	15.4	16.0	16.3	16.9	18.1
	4H	15.2	15.7	16.1	16.7	17.9	15.4	16.0	16.4	16.9	18.1
	6H	15.2	15.6	16.1	16.6	17.8	15.5	15.9	16.5	16.9	18.1
	8H	15.1	15.5	16.1	16.5	17.8	15.5	15.9	16.5	16.9	18.1
	12H	15.1	15.4	16.1	16.4	17.7	15.5	15.9	16.5	16.8	18.1
8H	4H	15.1	15.5	16.0	16.4	17.7	15.3	15.7	16.2	16.6	17.9
	6H	15.1	15.5	16.1	16.5	17.7	15.4	15.7	16.4	16.7	18.0
	8H	15.1	15.4	16.1	16.4	17.7	15.5	15.8	16.5	16.8	18.1
	12H	15.1	15.3	16.1	16.3	17.6	15.6	15.8	16.6	16.8	18.1
12H	4H	15.0	15.3	16.0	16.3	17.6	15.2	15.5	16.2	16.5	17.8
	6H	15.1	15.3	16.1	16.3	17.6	15.3	15.6	16.4	16.6	17.9
	8H	15.1	15.3	16.1	16.3	17.6	15.4	15.7	16.5	16.7	18.0

<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 1200</b> <b>B = 50</b>
------------------------	---	--------------------------------------	----------------------------------

C-planes	$\gamma$	Luminance in cd/m <sup>2</sup>								
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°		
45°	45°	15106.7	15074.0	15263.2	15443.0	15610.3	15809.5	16118.8		
50°	50°	7801.6	9038.1	10164.1	9302.1	8383.0	9956.2	11114.7		
55°	55°	3547.1	4778.0	4513.3	5156.1	3894.2	5377.3	4998.2		
60°	60°	2745.3	2849.0	3011.4	2791.4	2801.7	2979.6	3114.3		
65°	65°	2667.1	2646.2	2752.2	2684.9	2798.8	2794.5	2815.1		
70°	70°	2385.9	2430.7	2529.1	2528.9	2568.9	2598.2	2732.2		
75°	75°	2190.8	2273.9	2505.7	2393.0	2448.4	2573.3	2635.4		
80°	80°	1978.9	2096.3	2312.2	2516.6	2334.3	2604.2	2666.5		
85°	85°	1924.2	1950.5	2027.4	2346.8	2464.2	2819.9	2939.5		

**Photometric test report**

<b>Family</b> <b>Silica® 21</b>	<b>Order number: 51MX33TAT7B</b> <b>EAN: 4058352685563</b>	<b>LP number</b> <b>59332_57</b>
------------------------------------	---	-------------------------------------



**Luminance values in cd/m<sup>2</sup>**

$\gamma$  65°   
   $\gamma$  70°   
   $\gamma$  75°   
   $\gamma$  80°   
   $\gamma$  85°

