

Photometric test report

Family
Silica® 21

Order number: 51MX32DC3DSB
EAN: 4058352893449

LP number
59279_98




Version Suspended luminaire, reflector, black, direct-/indirect distribution, wide distribution, UGR≤16 (L65≤1000cd/m²)
Lamps LED 3000 K | CRI ≥ 80
Controlgear ECG-DALI
Rated values Net luminous flux = 18220 lm
 Power consumption = 113.0 W
 Luminous efficacy = 161.2 lm/W

serial documentation
02.08.2023



Luminous intensity in cd/klm C180-0 C270-90 **Imax: 425 cd/klm**

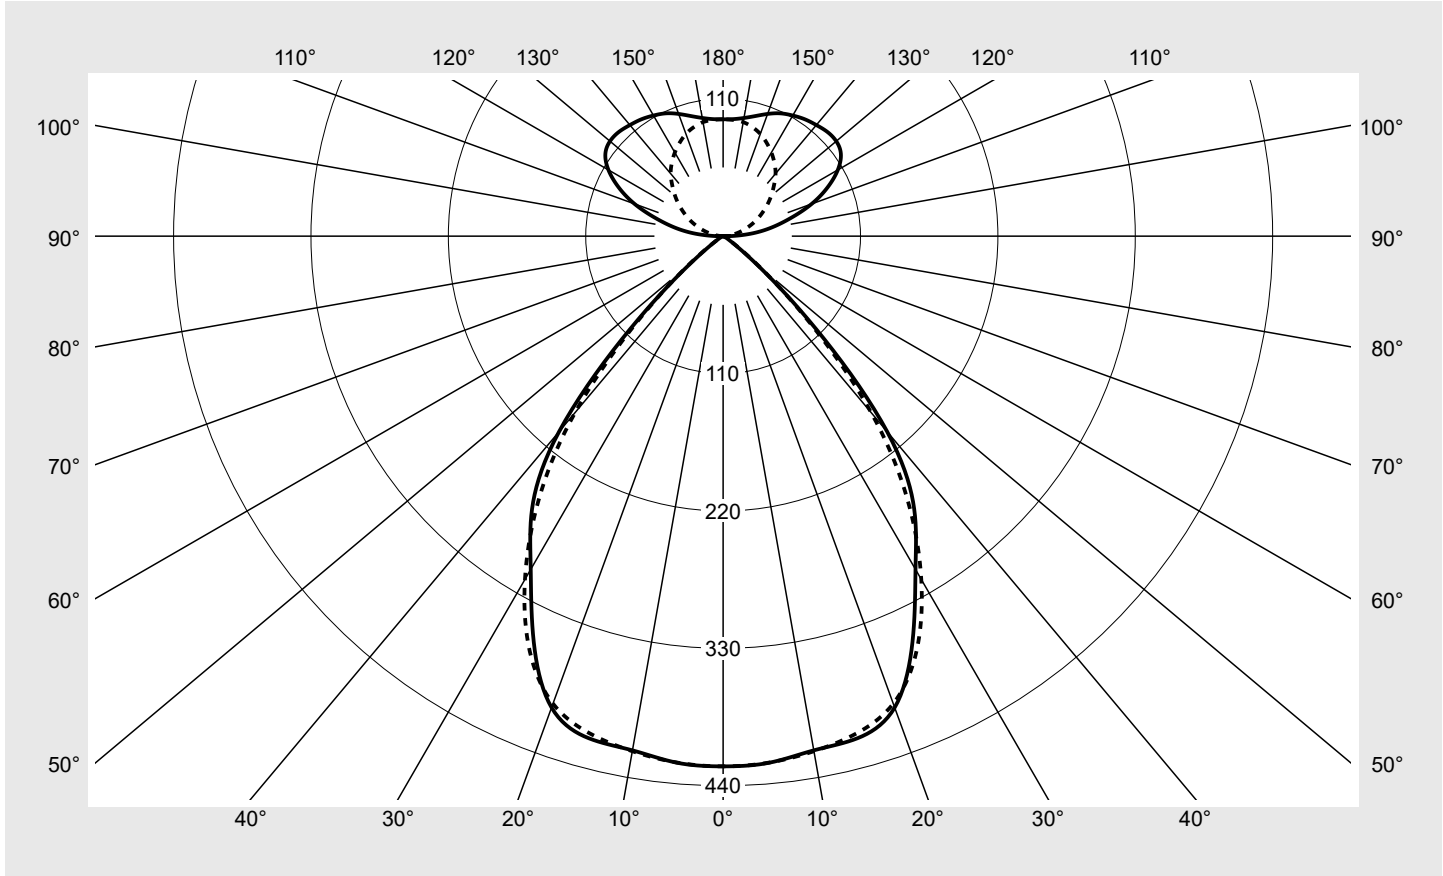

Classifications

DIN 5040	C 6 2
CIE	N1=86 N2=99 N3=100 N4=59 N5=100

Luminaire light output ratios

η_{LB}	100.0%
ϕ_u	59.2%
ϕ_o	40.8%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX32DC3DSB EAN: 4058352893449	LP number 59279_98
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	424.5	424.5	424.5	424.5	424.5	424.5	424.5	2.5	2.5
5°	423.2	423.7	423.1	423.1	423.3	423.7	423.1	20.2	22.8
10°	418.0	417.2	417.3	418.4	419.3	417.7	418.7	39.8	62.6
15°	416.1	416.5	413.5	413.8	413.5	412.7	412.2	58.7	121.3
20°	401.6	404.7	402.8	404.0	399.5	397.4	398.3	75.3	196.5
25°	358.7	364.9	370.6	376.3	375.4	369.4	366.5	85.7	282.2
30°	308.1	312.2	314.3	321.5	326.7	320.5	317.3	87.1	369.4
35°	266.7	269.2	262.0	257.7	262.2	261.4	257.3	82.5	451.9
40°	204.3	207.3	203.4	196.7	194.2	189.2	184.5	69.6	521.5
45°	105.6	109.2	112.9	113.5	110.1	103.6	98.8	42.1	563.6
50°	35.1	38.0	43.5	46.6	44.5	40.2	37.5	17.4	581.0
55°	9.3	10.9	14.6	18.5	15.5	12.0	10.3	6.1	587.1
60°	3.6	4.0	5.4	7.2	5.8	4.5	4.1	2.4	589.5
65°	1.2	1.4	2.0	2.5	2.2	1.8	1.6	0.9	590.5
70°	0.8	0.8	0.6	0.6	0.7	0.9	0.9	0.4	590.8
75°	0.2	0.2	0.2	0.3	0.2	0.3	0.2	0.1	591.0
80°	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.0	591.0
85°	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.2	591.2
90°	4.7	4.5	4.8	4.8	2.8	1.0	0.4	1.9	593.1
95°	21.9	22.4	24.0	22.7	14.5	7.5	3.9	9.5	602.5
100°	39.1	40.2	40.5	35.5	23.8	13.4	8.9	16.0	618.5
105°	56.1	57.3	56.2	48.0	32.8	20.3	14.9	22.1	640.6
110°	75.4	75.7	70.9	59.1	42.1	27.5	21.3	27.8	668.4
115°	92.2	91.4	84.2	69.3	51.0	34.7	28.4	32.4	700.7
120°	106.0	104.3	95.1	77.6	59.4	41.8	35.4	35.5	736.3
125°	115.1	111.9	101.7	85.2	66.4	48.4	42.8	36.9	773.1
130°	118.2	115.6	104.8	89.7	71.8	55.3	50.2	36.5	809.6
135°	118.0	115.6	106.0	92.7	76.1	61.7	57.6	34.9	844.5
140°	116.1	114.4	106.3	94.9	79.7	67.7	65.3	32.5	877.0
145°	114.2	113.0	106.3	96.1	83.1	73.4	71.6	29.6	906.6
150°	111.5	111.1	105.1	96.0	85.8	78.8	77.3	26.1	932.7
155°	108.5	108.2	102.4	95.6	87.9	83.6	82.4	22.1	954.8
160°	104.1	103.9	99.3	94.8	89.7	87.3	87.1	17.8	972.6
165°	99.5	99.0	96.7	93.7	91.6	90.3	90.4	13.4	986.0
170°	96.1	95.6	95.0	93.7	92.8	92.7	92.7	9.0	995.0
175°	94.1	94.0	93.5	93.3	93.3	93.4	93.4	4.5	999.4
180°	93.6	93.6	93.6	93.6	93.6	93.6	93.6	0.6	1000.0

Photometric test report

Family Silica® 21	Order number: 51MX32DC3DSB EAN: 4058352893449	LP number 59279_98
-----------------------------	--	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	16.3	17.1	17.1	18.0	19.0	16.1	17.0	16.9	17.8	18.8
	3H	16.0	16.7	16.9	17.6	18.7	15.8	16.6	16.7	17.5	18.5
	4H	15.8	16.5	16.7	17.4	18.5	15.7	16.4	16.6	17.3	18.4
	6H	15.7	16.3	16.6	17.2	18.3	15.5	16.2	16.4	17.1	18.2
	8H	15.6	16.1	16.5	17.1	18.2	15.4	15.9	16.3	16.9	18.0
	12H	15.5	16.0	16.4	16.9	18.1	15.3	15.9	16.3	16.8	18.0
4H	2H	15.9	16.6	16.8	17.5	18.6	15.7	16.4	16.6	17.2	18.4
	3H	15.6	16.2	16.5	17.1	18.3	15.4	16.0	16.3	16.9	18.1
	4H	15.5	16.0	16.4	16.9	18.1	15.3	15.8	16.2	16.7	17.9
	6H	15.3	15.7	16.2	16.7	17.9	15.1	15.6	16.1	16.5	17.7
	8H	15.2	15.6	16.2	16.5	17.8	15.0	15.4	16.0	16.4	17.6
	12H	15.1	15.4	16.1	16.4	17.6	14.9	15.3	15.9	16.2	17.5
8H	4H	15.2	15.6	16.2	16.6	17.8	15.0	15.4	16.0	16.4	17.6
	6H	15.1	15.4	16.1	16.4	17.6	14.9	15.2	15.8	16.1	17.4
	8H	15.0	15.3	16.0	16.3	17.5	14.8	15.1	15.8	16.1	17.3
	12H	14.9	15.1	15.9	16.1	17.4	14.7	15.0	15.7	15.9	17.2
12H	4H	15.1	15.5	16.1	16.4	17.7	14.9	15.3	15.9	16.2	17.4
	6H	15.0	15.3	16.0	16.2	17.5	14.8	15.1	15.8	16.0	17.3
	8H	14.9	15.1	15.9	16.1	17.4	14.7	14.9	15.7	15.9	17.2

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 2940 B = 49
------------------------	---	--------------------------------------	----------------------------------

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		18894.2	19529.1	20193.1	20307.0	19696.2	18538.1	17678.6	
50°		6911.2	7475.3	8557.1	9160.0	8753.7	7916.1	7385.8	
55°		2044.1	2412.3	3214.0	4079.3	3423.3	2636.3	2266.8	
60°		914.2	1018.9	1361.1	1811.9	1470.9	1147.4	1042.2	
65°		372.6	427.9	592.8	752.7	667.7	528.2	484.8	
70°		296.2	308.8	228.2	214.8	258.5	332.4	335.4	
75°		82.1	109.9	89.4	125.1	114.8	137.8	120.2	
80°		21.1	21.1	30.6	45.9	61.9	71.4	81.6	
85°		571.7	571.7	555.8	542.7	535.5	534.0	545.6	


Photometric test report

Family Silica® 21	Order number: 51MX32DC3DSB EAN: 4058352893449	LP number 59279_98
------------------------------------	--	-------------------------------------

Luminance values in cd/m²

γ 65°	γ 70°	γ 75°	γ 80°	γ 85°
--------------	--------------	--------------	--------------	--------------

siteco

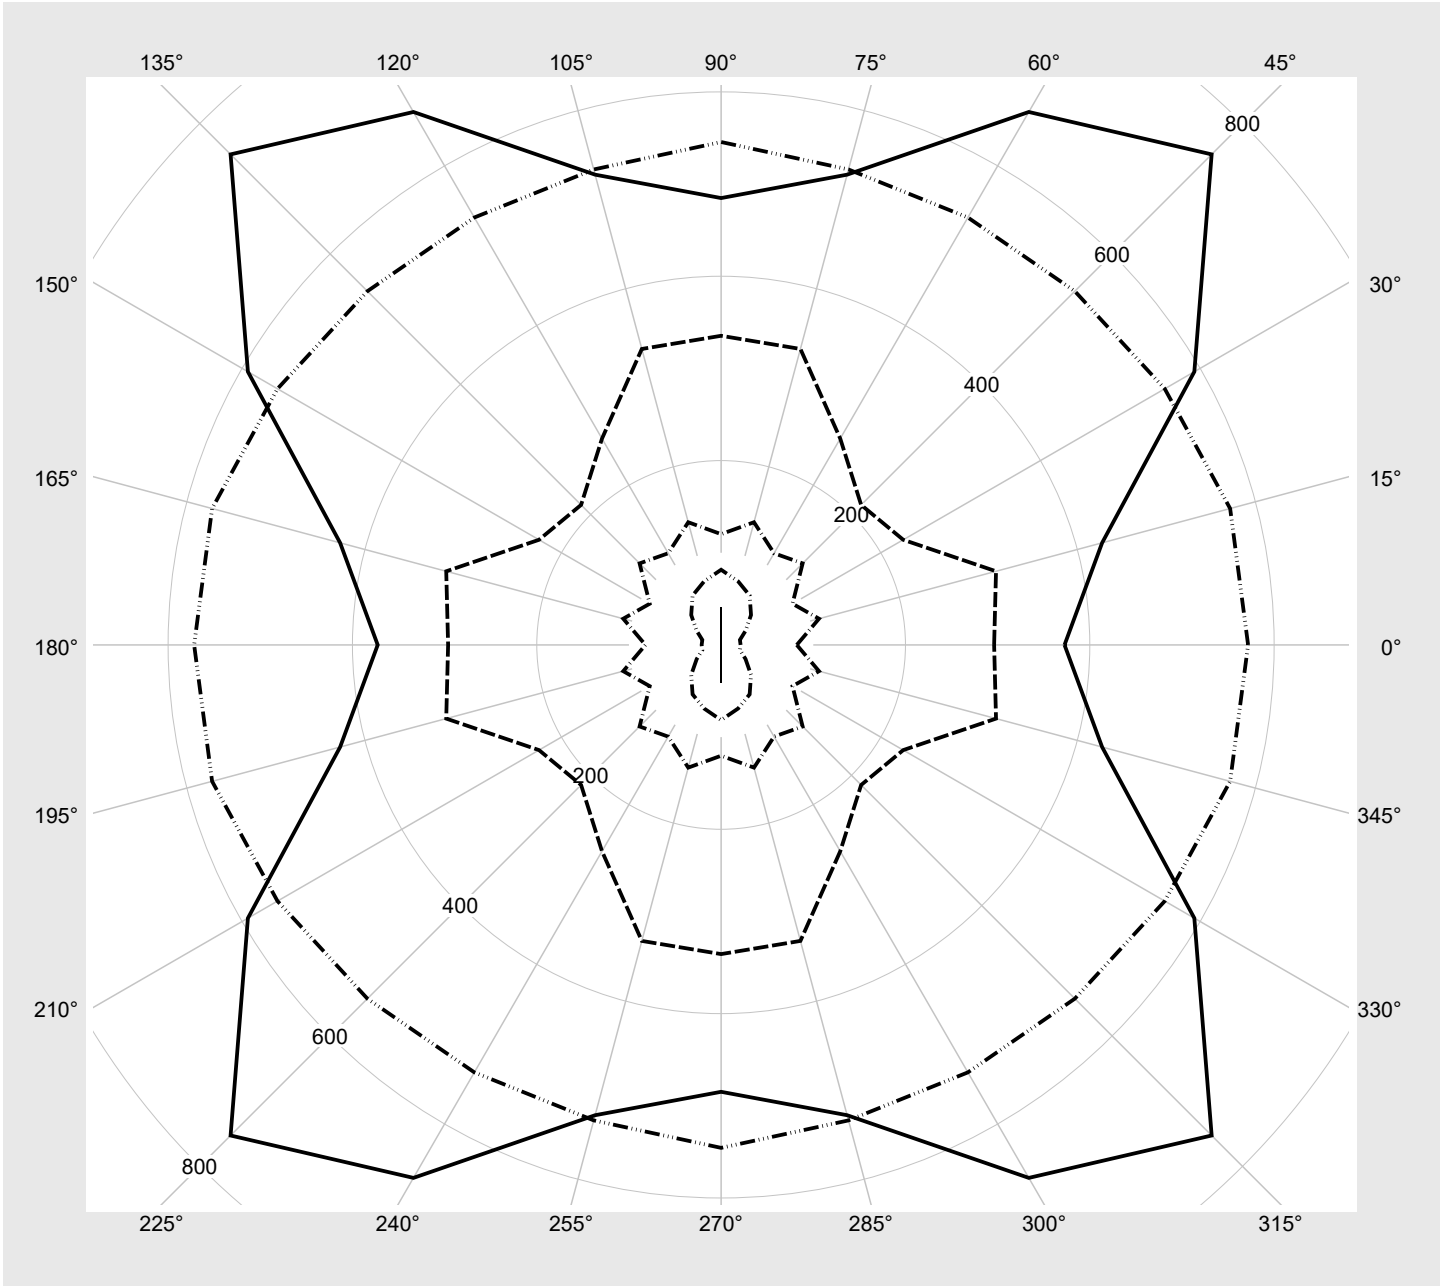

Photometric test report

Family Silica® 21	Order number: 51MX32DC3DSB EAN: 4058352893449	LP number 59279_98
-----------------------------	--	------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	18220	113.0
95	240	252	17276	107.0
90	227	250	16390	100.9
85	214	248	15501	95.6
80	201	245	14606	90.1
75	187	243	13636	83.9
70	174	240	12727	78.0
65	161	237	11812	72.7
60	149	234	10962	67.2
55	136	231	10029	61.6
50	123	227	9094	56.2
45	111	224	8227	50.8
40	98	219	7280	45.5
35	86	214	6401	40.4
30	73	208	5442	34.9
25	61	202	4555	29.5
20	49	194	3661	24.4
15	37	183	2759	19.1
10	25	169	1857	13.8
5	12	142	874	8.0
2	5	110	343	4.1