


Photometric test report

Family Highbay 31	Order number: 51HC427A4FMB + 59HC91003 EAN: 4058352700136 + 4058352463215	LP number 59132_3
	Version primary light control with lens, PC, clear, aluminium reflector, wide distribution	serial documentation 16.01.2023
	Lamps LED 4000 K CRI ≥ 80 Controlgear ECG Rated values Net luminous flux = 12700 lm Power consumption = 94.0 W Luminous efficacy = 135.1 lm/W	
		

Luminous intensity in cd/klm C180-0 **Imax: 677 cd/klm**

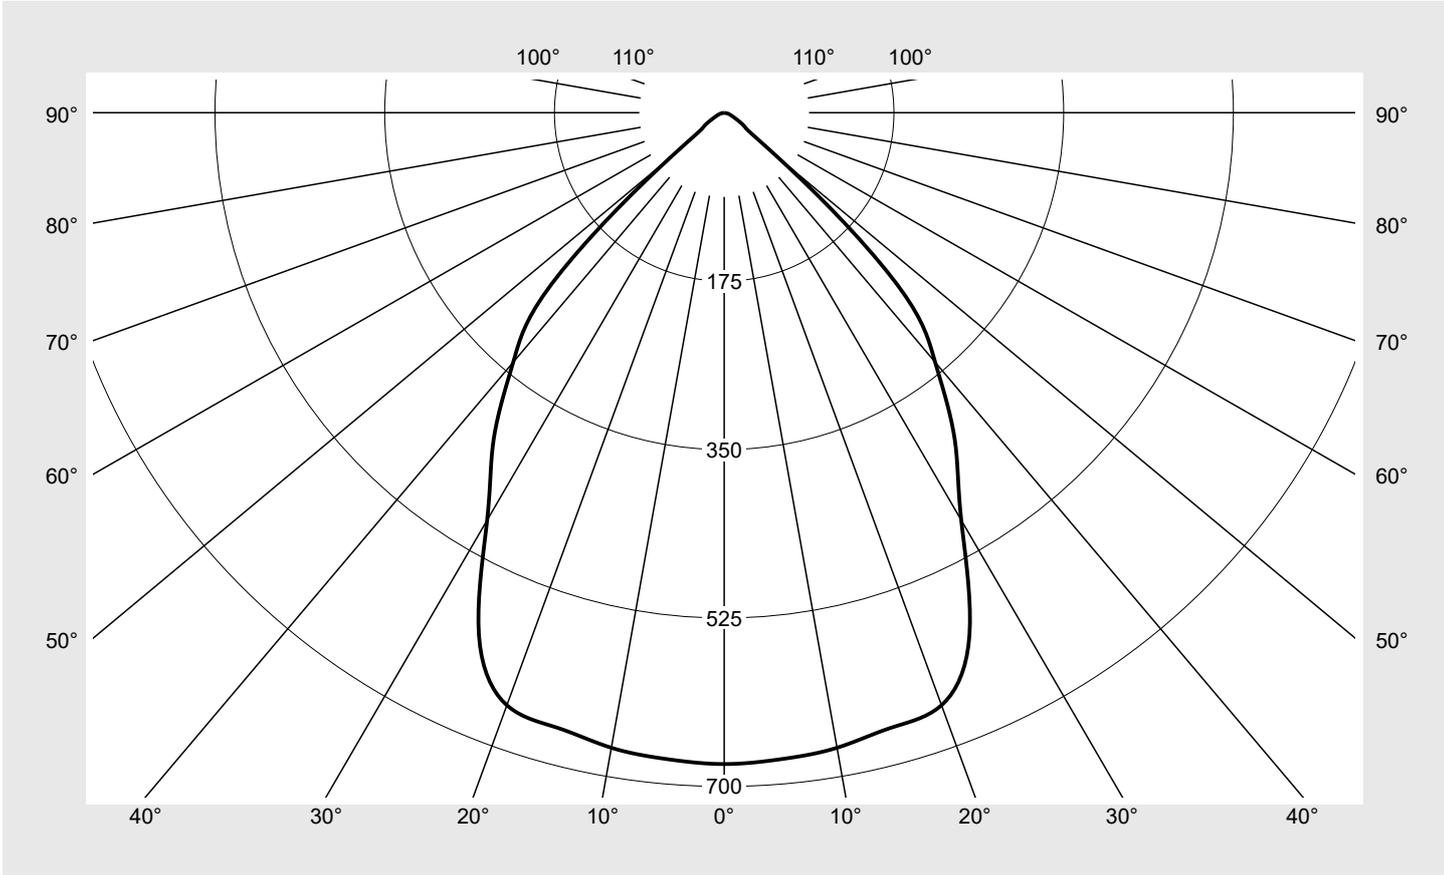

Classifications	
DIN 5040	A 6 0
CIE	N1=81 N2=98 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Highbay 31	Order number: 51HC427A4FMB + 59HC91003 EAN: 4058352700136 + 4058352463215	LP number 59132_3
-----------------------------	--	-----------------------------



Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0°	676.7	4.0	4.0
5°	674.2	32.2	36.3
10°	670.0	63.8	100.0
15°	661.8	93.9	193.9
20°	655.2	122.8	316.7
25°	598.5	138.6	455.4
30°	488.8	134.0	589.4
35°	414.5	130.3	719.7
40°	338.4	119.2	838.9
45°	251.6	97.5	936.4
50°	72.9	30.6	967.0
55°	26.4	11.9	978.9
60°	17.2	8.2	987.1
65°	10.4	5.2	992.2
70°	7.0	3.6	995.8
75°	4.4	2.3	998.2
80°	2.4	1.3	999.5
85°	0.9	0.5	1000.0
90°	0.0	0.0	1000.0
95°	0.0	0.0	1000.0
100°	0.0	0.0	1000.0
105°	0.0	0.0	1000.0
110°	0.0	0.0	1000.0
115°	0.0	0.0	1000.0
120°	0.0	0.0	1000.0
125°	0.0	0.0	1000.0
130°	0.0	0.0	1000.0
135°	0.0	0.0	1000.0
140°	0.0	0.0	1000.0
145°	0.0	0.0	1000.0
150°	0.0	0.0	1000.0
155°	0.0	0.0	1000.0
160°	0.0	0.0	1000.0
165°	0.0	0.0	1000.0
170°	0.0	0.0	1000.0
175°	0.0	0.0	1000.0
180°	0.0	0.0	1000.0

Photometric test report

Family Highbay 31	Order number: 51HC427A4FMB + 59HC91003 EAN: 4058352700136 + 4058352463215	LP number 59132_3
----------------------	--	----------------------

UGR-Table	Standard room	siteco								
-----------	---------------	--------	--	--	--	--	--	--	--	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	20.3	21.6	20.7	21.9	22.3	20.3	21.6	20.7	21.9	22.3
	3H	20.2	21.4	20.6	21.7	22.1	20.2	21.4	20.6	21.7	22.1
	4H	20.2	21.2	20.6	21.6	22.0	20.2	21.2	20.6	21.6	22.0
	6H	20.1	21.1	20.5	21.5	21.8	20.1	21.1	20.5	21.5	21.8
	8H	20.2	21.0	20.6	21.4	21.8	20.2	21.0	20.6	21.4	21.8
	12H	20.1	20.9	20.6	21.3	21.7	20.1	20.9	20.6	21.3	21.7
4H	2H	20.1	21.2	20.5	21.6	21.9	20.1	21.2	20.5	21.6	21.9
	3H	20.0	20.9	20.5	21.3	21.7	20.0	20.9	20.5	21.3	21.7
	4H	20.0	20.8	20.4	21.2	21.6	20.0	20.8	20.4	21.2	21.6
	6H	19.9	20.6	20.4	21.0	21.5	19.9	20.6	20.4	21.0	21.5
	8H	19.9	20.5	20.4	21.0	21.4	19.9	20.5	20.4	21.0	21.4
	12H	19.9	20.4	20.4	20.9	21.4	19.9	20.4	20.4	20.9	21.4
8H	4H	19.9	20.5	20.4	20.9	21.4	19.9	20.5	20.4	20.9	21.4
	6H	19.8	20.3	20.3	20.8	21.3	19.8	20.3	20.3	20.8	21.3
	8H	19.8	20.2	20.3	20.7	21.2	19.8	20.2	20.3	20.7	21.2
	12H	19.8	20.1	20.3	20.6	21.2	19.8	20.1	20.3	20.6	21.2
12H	4H	19.9	20.4	20.4	20.8	21.3	19.9	20.4	20.4	20.8	21.3
	6H	19.8	20.2	20.3	20.7	21.2	19.8	20.2	20.3	20.7	21.2
	8H	19.8	20.1	20.3	20.6	21.2	19.8	20.1	20.3	20.6	21.2

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 410
-----------------	---------------------------------	---------------------------------------

C-planes	0°
γ	Luminance in cd/m ²
45°	34220.7
50°	10913.7
55°	4434.4
60°	3313.7
65°	2361.5
70°	1977.5
75°	1639.8
80°	1338.9
85°	1034.2

Photometric test report

Family Highbay 31	Order number: 51HC427A4FMB + 59HC91003 EAN: 4058352700136 + 4058352463215	LP number 59132_3
-----------------------------	--	-----------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

