




Photometric test report

Family Highbay 31	Order number: 51HC427A4JMB01 EAN: 4058352700204	LP number 59124_5
	Version primary light control with lens, PC, clear, wide distribution, PIR-sensor	serial documentation 16.01.2023
	Lamps LED 4000 K CRI ≥ 80 Controlgear ECG	
Rated values Net luminous flux = 20000 lm Power consumption = 134.0 W Luminous efficacy = 149.3 lm/W		

Luminous intensity in cd/klm C180-0 **Imax: 502 cd/klm**

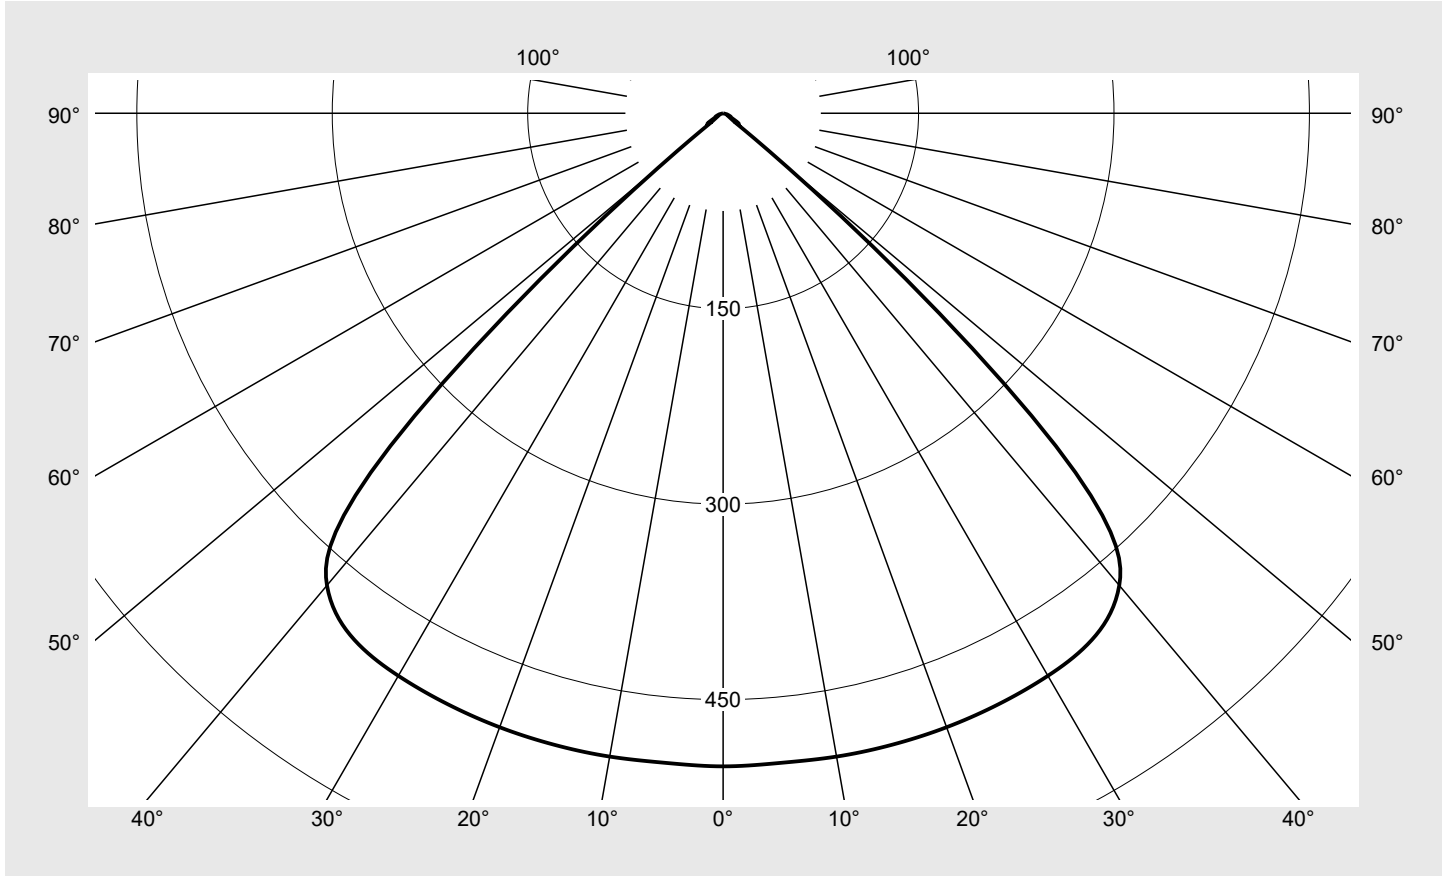

Classifications	
DIN 5040	A 6 0
CIE	N1=78 N2=99 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Highbay 31	Order number: 51HC427A4JMB01 EAN: 4058352700204	LP number 59124_5
----------------------	--	----------------------

Table of values for luminous intensities	Maximum luminous intensity	sITeco
--	----------------------------	--------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0°	501.3	3.0	3.0
5°	500.5	23.9	26.9
10°	501.4	47.7	74.6
15°	501.7	71.2	145.8
20°	501.5	94.0	239.8
25°	500.4	115.9	355.7
30°	498.6	136.6	492.4
35°	493.4	155.1	647.5
40°	473.0	166.7	814.2
45°	361.1	140.0	954.1
50°	65.2	27.4	981.5
55°	13.3	6.0	987.5
60°	9.1	4.3	991.8
65°	6.5	3.2	995.1
70°	4.5	2.3	997.4
75°	2.9	1.5	998.9
80°	1.5	0.8	999.7
85°	0.5	0.3	1000.0
90°	0.0	0.0	1000.0
95°	0.0	0.0	1000.0
100°	0.0	0.0	1000.0
105°	0.0	0.0	1000.0
110°	0.0	0.0	1000.0
115°	0.0	0.0	1000.0
120°	0.0	0.0	1000.0
125°	0.0	0.0	1000.0
130°	0.0	0.0	1000.0
135°	0.0	0.0	1000.0
140°	0.0	0.0	1000.0
145°	0.0	0.0	1000.0
150°	0.0	0.0	1000.0
155°	0.0	0.0	1000.0
160°	0.0	0.0	1000.0
165°	0.0	0.0	1000.0
170°	0.0	0.0	1000.0
175°	0.0	0.0	1000.0
180°	0.0	0.0	1000.0

Photometric test report

Family Highbay 31	Order number: 51HC427A4JMB01 EAN: 4058352700204	LP number 59124_5
----------------------	--	----------------------

UGR-Table	Standard room	siteco								
-----------	---------------	--------	--	--	--	--	--	--	--	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	25.5	26.9	25.9	27.2	27.5	25.5	26.9	25.9	27.2	27.5
	3H	25.4	26.6	25.8	27.0	27.3	25.4	26.6	25.8	27.0	27.3
	4H	25.4	26.5	25.8	26.8	27.2	25.4	26.5	25.8	26.8	27.2
	6H	25.3	26.3	25.7	26.7	27.1	25.3	26.3	25.7	26.7	27.1
	8H	25.3	26.2	25.7	26.6	27.0	25.3	26.2	25.7	26.6	27.0
	12H	25.3	26.1	25.7	26.5	26.9	25.3	26.1	25.7	26.5	26.9
4H	2H	25.4	26.5	25.8	26.8	27.2	25.4	26.5	25.8	26.8	27.2
	3H	25.2	26.1	25.7	26.5	26.9	25.2	26.1	25.7	26.5	26.9
	4H	25.2	26.0	25.6	26.4	26.8	25.2	26.0	25.6	26.4	26.8
	6H	25.1	25.8	25.5	26.2	26.7	25.1	25.8	25.5	26.2	26.7
	8H	25.1	25.7	25.5	26.1	26.6	25.1	25.7	25.5	26.1	26.6
	12H	25.0	25.6	25.5	26.0	26.5	25.0	25.6	25.5	26.0	26.5
8H	4H	25.1	25.7	25.5	26.1	26.6	25.1	25.7	25.5	26.1	26.6
	6H	25.0	25.5	25.5	25.9	26.5	25.0	25.5	25.5	25.9	26.5
	8H	24.9	25.4	25.4	25.8	26.4	24.9	25.4	25.4	25.8	26.4
	12H	24.9	25.2	25.4	25.7	26.3	24.9	25.2	25.4	25.7	26.3
12H	4H	25.0	25.6	25.5	26.0	26.5	25.0	25.6	25.5	26.0	26.5
	6H	24.9	25.4	25.4	25.8	26.4	24.9	25.4	25.4	25.8	26.4
	8H	24.9	25.2	25.4	25.7	26.3	24.9	25.2	25.4	25.7	26.3

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 311
-----------------	---------------------------------	---------------------------------------

C-planes	0°
γ	Luminance in cd/m ²
45°	134460.4
50°	26718.5
55°	6113.2
60°	4777.5
65°	4066.8
70°	3476.3
75°	2936.8
80°	2257.6
85°	1519.5

Photometric test report

Family Highbay 31	Order number: 51HC427A4JMB01 EAN: 4058352700204	LP number 59124_5
-----------------------------	--	-----------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

