


Photometric test report

Family Silica® 21 Ring	Order number: 5PJBI1D1004A EAN: 4058352960226	LP number 59506_1
	Version suspended luminaire incl. Pendant, white, inner ring side luminous, cover opal, polycarbonate, frosted, diffuse beam Lamps LED 3000 K CRI ≥ 80 Controlgear ECG-DALI Rated values Net luminous flux = 3430 lm Power consumption = 60.0 W Luminous efficacy = 57.2 lm/W	serial documentation 08.11.2023 

Luminous intensity in cd/klm C180-0 **Imax: 93 cd/klm**

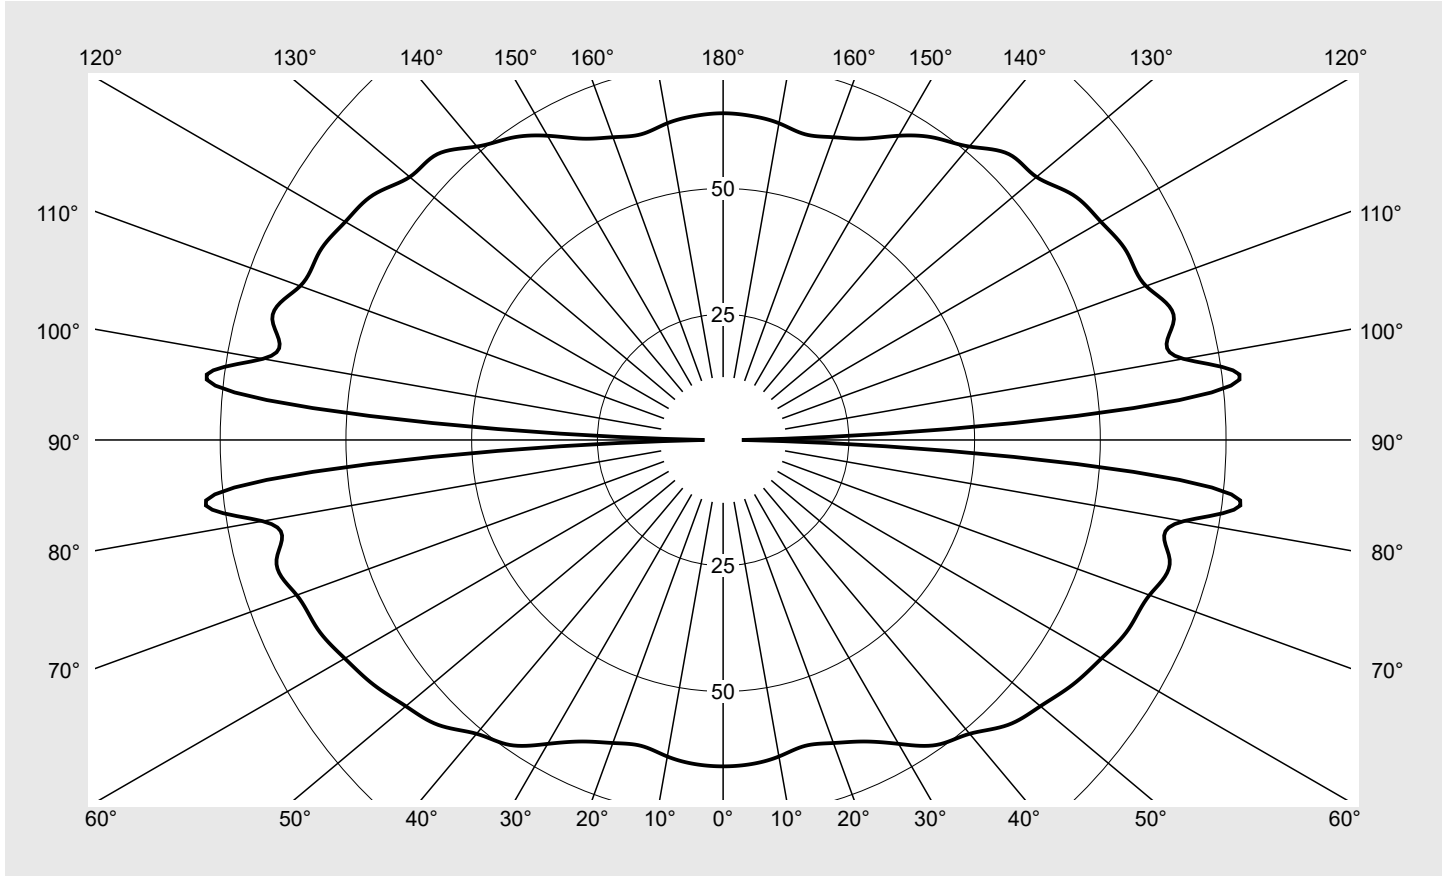

Classifications	
DIN 5040	C 2 2
CIE	N1=22 N2=48 N3=76 N4=50 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	50.0%
ϕ_o	50.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 Ring	Order number: 5PJBI1D1004A EAN: 4058352960226	LP number 59506_1
----------------------------------	--	-----------------------------

Table of values for luminous intensities	Maximum luminous intensity	sITeco
---	----------------------------	---------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0°	64.9	0.4	0.4
5°	64.7	3.1	3.5
10°	63.9	6.1	9.6
15°	63.0	8.9	18.5
20°	64.1	12.0	30.5
25°	66.2	15.3	45.8
30°	69.8	19.1	65.0
35°	74.0	23.3	88.2
40°	76.3	26.9	115.1
45°	80.1	31.1	146.2
50°	82.4	34.6	180.7
55°	84.8	38.1	218.8
60°	86.9	41.2	260.1
65°	89.0	44.2	304.3
70°	90.2	46.5	350.7
75°	91.9	48.7	399.4
80°	93.0	50.2	449.6
85°	91.1	49.8	499.4
90°	3.7	2.0	501.4
95°	91.1	49.7	551.1
100°	92.9	50.2	601.3
105°	92.8	49.1	650.4
110°	89.5	46.1	696.5
115°	88.6	44.0	740.5
120°	86.8	41.2	781.7
125°	84.9	38.1	819.8
130°	81.3	34.2	854.0
135°	80.4	31.1	885.1
140°	76.2	26.8	912.0
145°	73.3	23.1	935.0
150°	69.8	19.1	954.2
155°	66.1	15.3	969.5
160°	64.1	12.0	981.5
165°	62.9	8.9	990.4
170°	63.9	6.1	996.5
175°	64.7	3.1	999.6
180°	65.0	0.4	1000.0

Photometric test report

Family Silica® 21 Ring	Order number: 5PJBI1D1004A EAN: 4058352960226	LP number 59506_1
----------------------------------	--	-----------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	25.5	26.7	26.3	27.5	28.6	25.5	26.7	26.3	27.5	28.6
	3H	28.1	29.2	29.0	30.1	31.2	28.1	29.2	29.0	30.1	31.2
	4H	29.5	30.5	30.4	31.4	32.6	29.5	30.5	30.4	31.4	32.6
	6H	30.9	31.8	31.8	32.8	33.9	30.9	31.8	31.8	32.8	33.9
	8H	31.5	32.4	32.4	33.3	34.6	31.5	32.4	32.4	33.3	34.6
	12H	32.2	33.1	33.2	34.0	35.2	32.2	33.1	33.2	34.0	35.2
4H	2H	26.4	27.4	27.2	28.3	29.4	26.4	27.4	27.2	28.3	29.4
	3H	29.2	30.0	30.1	31.0	32.2	29.2	30.0	30.1	31.0	32.2
	4H	30.7	31.5	31.6	32.4	33.7	30.7	31.5	31.6	32.4	33.7
	6H	32.2	32.9	33.2	33.9	35.1	32.2	32.9	33.2	33.9	35.1
	8H	33.0	33.6	33.9	34.6	35.9	33.0	33.6	33.9	34.6	35.9
	12H	33.8	34.3	34.7	35.3	36.6	33.8	34.3	34.7	35.3	36.6
8H	4H	31.2	31.8	32.2	32.8	34.1	31.2	31.8	32.2	32.8	34.1
	6H	33.0	33.5	34.0	34.5	35.8	33.0	33.5	34.0	34.5	35.8
	8H	33.9	34.4	34.9	35.4	36.8	33.9	34.4	34.9	35.4	36.8
	12H	34.9	35.3	35.9	36.3	37.7	34.9	35.3	35.9	36.3	37.7
12H	4H	31.3	31.9	32.3	32.9	34.2	31.3	31.9	32.3	32.9	34.2
	6H	33.2	33.6	34.2	34.7	36.0	33.2	33.6	34.2	34.7	36.0
	8H	34.2	34.7	35.2	35.7	37.0	34.2	34.7	35.2	35.7	37.0

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 47	H(C0) = 48 H(C90) = 48	H(C180) = 48 H(C270) = 48
------------------------	---	--------------------------------------	---------------------------	------------------------------

C-planes	0°
γ	Luminance in cd/m ²
45°	97382.2
50°	99345.1
55°	102357.2
60°	105612.7
65°	109847.4
70°	114043.3
75°	119983.7
80°	126407.2
85°	130290.3

Photometric test report

Family Silica® 21 Ring	Order number: 5PJBI1D1004A EAN: 4058352960226	LP number 59506_1
---	--	------------------------------------



Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

