


Photometric test report

Family Licross® 11 Recessed	Order number: 51TE18DN695GD EAN: 4069025276223	LP number 58691_208
	Version cover frosted, medium distribution, high visual comfort Lamps LED 6500 K CRI ≥ 80 Controlgear ECG-DALI Setting DC mode (central or group accumulator) initial emergency light level Rated values Net luminous flux = 1450 lm Power consumption = 9.2 W Luminous efficacy = 157.6 lm/W	serial documentation 06.11.2024



Luminous intensity in cd/klm C180-0 C270-90 Imax: 890 cd/klm

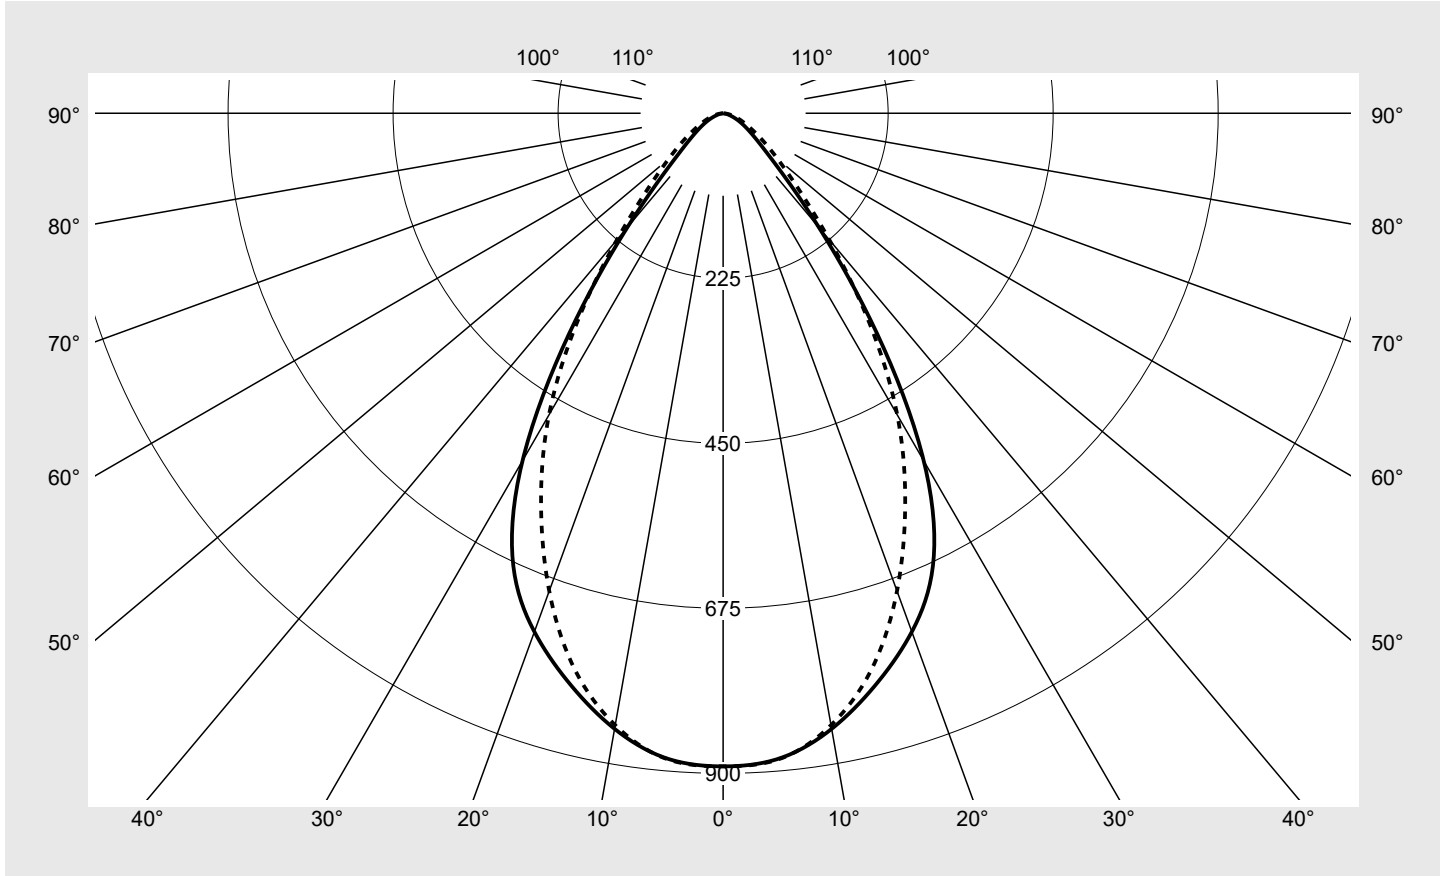

Classifications	
DIN 5040	A 6 0
CIE	N1=83 N2=96 N3=99 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE18DN695GD EAN: 4069025276223	LP number 58691_208
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	890.5	890.5	890.5	890.5	890.5	890.5	890.5	5.3	5.3
5°	883.0	882.3	875.7	876.1	880.2	881.2	883.8	42.0	47.4
10°	852.3	852.7	846.0	846.4	847.1	846.1	847.2	80.7	128.1
15°	806.0	807.1	800.6	798.1	793.1	786.0	783.9	113.0	241.1
20°	752.4	753.8	745.8	735.1	719.0	700.4	693.3	136.8	377.8
25°	677.7	678.7	666.2	642.3	616.2	594.6	587.5	147.9	525.7
30°	547.1	547.0	530.5	500.0	481.5	475.9	474.8	139.1	664.9
35°	364.4	363.5	349.1	327.1	328.9	340.7	345.9	108.2	773.0
40°	203.2	202.2	193.4	185.6	201.9	218.9	225.4	71.4	844.5
45°	108.8	108.0	102.7	103.7	123.9	139.5	144.1	45.5	890.0
50°	66.7	66.1	62.8	66.6	83.9	94.8	97.2	31.9	921.9
55°	45.6	45.3	45.3	49.0	60.9	67.0	67.8	24.3	946.1
60°	31.9	31.8	34.1	38.0	45.2	47.1	47.1	18.6	964.8
65°	21.6	21.7	24.8	28.3	33.6	33.2	32.9	14.0	978.8
70°	13.4	13.7	16.2	19.9	24.5	23.3	22.8	9.9	988.7
75°	7.5	7.7	9.1	12.7	16.1	15.5	14.8	6.4	995.1
80°	4.0	4.1	4.6	6.4	8.9	8.9	8.1	3.5	998.6
85°	1.9	1.8	2.0	2.6	3.4	3.5	3.0	1.4	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE18DN695GD EAN: 4069025276223	LP number 58691_208
---------------------------------------	-----------------------------------------------------------------	-------------------------------

UGR-Table	Standard room	siteco								
-----------	---------------	--------	--	--	--	--	--	--	--	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	12.2	13.6	12.6	13.9	14.2	13.2	14.5	13.5	14.8	15.1
	3H	12.4	13.6	12.8	13.9	14.3	13.7	14.8	14.0	15.1	15.5
	4H	12.5	13.5	12.9	13.9	14.3	13.9	14.9	14.2	15.3	15.6
	6H	12.5	13.4	12.9	13.8	14.2	14.0	14.9	14.4	15.3	15.7
	8H	12.5	13.4	13.0	13.8	14.2	14.1	14.9	14.5	15.3	15.7
	12H	12.5	13.3	13.0	13.7	14.1	14.1	14.9	14.5	15.3	15.7
4H	2H	12.4	13.5	12.8	13.8	14.2	13.3	14.3	13.6	14.7	15.0
	3H	12.7	13.6	13.1	14.0	14.4	13.9	14.8	14.3	15.2	15.6
	4H	12.8	13.5	13.2	14.0	14.4	14.2	15.0	14.7	15.4	15.8
	6H	12.8	13.4	13.2	13.9	14.3	14.4	15.1	14.9	15.5	16.0
	8H	12.8	13.4	13.3	13.8	14.3	14.5	15.1	15.0	15.5	16.0
	12H	12.8	13.3	13.3	13.8	14.3	14.6	15.0	15.1	15.5	16.0
8H	4H	12.9	13.5	13.3	13.9	14.4	14.2	14.8	14.7	15.3	15.8
	6H	12.9	13.4	13.4	13.9	14.4	14.5	15.0	15.0	15.5	16.0
	8H	12.9	13.3	13.4	13.8	14.4	14.6	15.1	15.1	15.5	16.1
	12H	12.9	13.3	13.5	13.8	14.3	14.7	15.0	15.2	15.6	16.1
12H	4H	12.9	13.4	13.4	13.8	14.3	14.2	14.7	14.7	15.2	15.7
	6H	12.9	13.3	13.5	13.8	14.4	14.5	14.9	15.0	15.4	15.9
	8H	13.0	13.3	13.5	13.8	14.3	14.6	15.0	15.2	15.5	16.0

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1500 B = 58
-----------------	---------------------------------	-------------------------------	--------------------

C-planes	γ	0° 180°	15°	30°	45°	60°	75°	90° 270°
			165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°	
Luminance in cd/m²								
45°		2565.0	2546.3	2419.6	2443.1	2921.0	3287.3	3397.4
50°		1730.6	1713.9	1627.3	1727.5	2176.3	2458.0	2521.5
55°		1324.6	1316.5	1317.3	1422.8	1768.3	1946.3	1969.9
60°		1064.3	1059.1	1138.3	1267.8	1505.5	1569.8	1568.3
65°		852.5	856.0	978.3	1117.4	1324.2	1307.6	1296.1
70°		651.4	668.6	790.9	969.0	1193.4	1137.5	1110.2
75°		482.8	496.6	586.7	815.0	1037.9	1000.3	953.2
80°		384.0	390.3	443.0	615.6	857.6	850.5	781.7
85°		356.3	352.8	381.5	504.5	652.3	673.7	572.0

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE18DN695GD EAN: 4069025276223	LP number 58691_208
---------------------------------------	-----------------------------------------------------------------	--------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85°

