




Photometric test report

Family Spot 21 Performance	Order number: 51SD33MB11C3B EAN: 4069025538819	LP number 59945_8										
	<table border="0"> <tr> <td>Version</td> <td>housing, black, reflector, cover glass, transparent, medium distribution</td> </tr> <tr> <td>Lamps</td> <td>LED 3500 K CRI ≥ 90</td> </tr> <tr> <td>Controlgear</td> <td>ECG Multilumen</td> </tr> <tr> <td>Setting</td> <td>factory setting: DIP-Step=4</td> </tr> <tr> <td>Rated values</td> <td> Net luminous flux = 3030 lm Power consumption = 19.1 W Luminous efficacy = 158.6 lm/W </td> </tr> </table>	Version	housing, black, reflector, cover glass, transparent, medium distribution	Lamps	LED 3500 K CRI ≥ 90	Controlgear	ECG Multilumen	Setting	factory setting: DIP-Step=4	Rated values	Net luminous flux = 3030 lm Power consumption = 19.1 W Luminous efficacy = 158.6 lm/W	serial documentation 11.05.2026 
Version	housing, black, reflector, cover glass, transparent, medium distribution											
Lamps	LED 3500 K CRI ≥ 90											
Controlgear	ECG Multilumen											
Setting	factory setting: DIP-Step=4											
Rated values	Net luminous flux = 3030 lm Power consumption = 19.1 W Luminous efficacy = 158.6 lm/W											



Classifications	
DIN 5040	A 8 0
CIE	N1=99 N2=100 N3=100 N4=100 N5=100

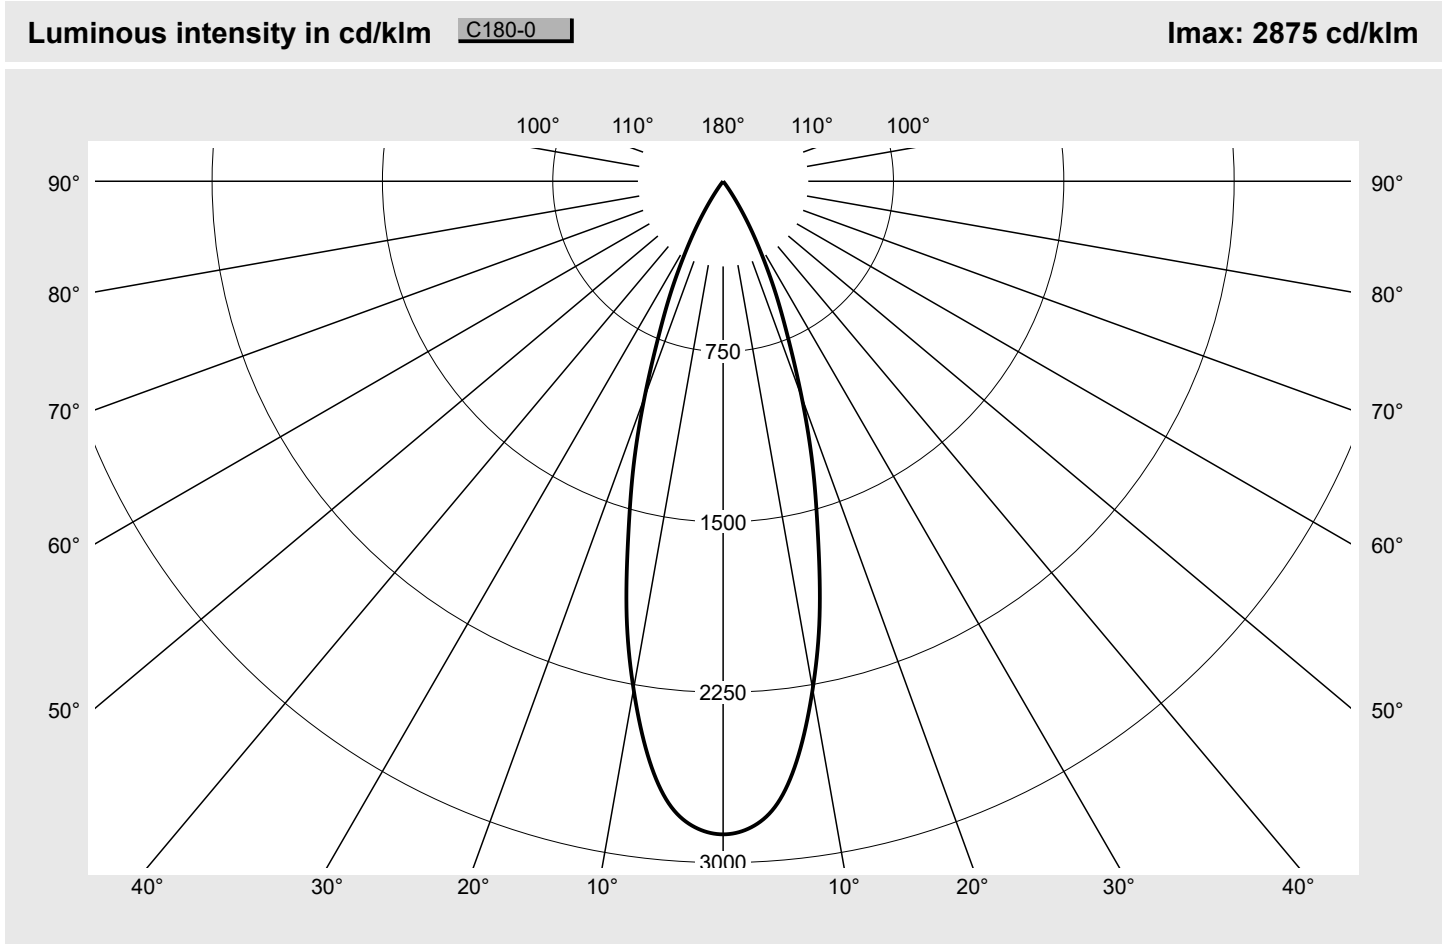Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 21 Performance	Order number: 51SD33MB11C3B EAN: 4069025538819	LP number 59945_8
--------------------------------------	---	-----------------------------

sITeco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0,0°	2875.4	4.3	4.3
2,5°	2846.8	34.0	38.3
5,0°	2749.2	65.7	104.0
7,5°	2546.8	91.1	195.2
10,0°	2270.6	108.1	303.2
12,5°	1962.1	116.4	419.7
15,0°	1613.1	114.4	534.1
17,5°	1309.8	108.0	642.1
20,0°	1010.8	94.8	736.9
22,5°	749.1	78.6	815.4
25,0°	553.8	64.2	879.6
27,5°	382.5	48.4	928.0
30,0°	247.7	34.0	962.0
32,5°	136.4	20.1	982.0
35,0°	55.9	8.8	990.8
37,5°	13.7	2.3	993.1
40,0°	8.1	1.4	994.5
42,5°	5.6	1.0	995.6
45,0°	4.1	0.8	996.4
47,5°	3.1	0.6	997.0
50,0°	2.4	0.5	997.5
52,5°	2.0	0.4	998.0
55,0°	1.8	0.4	998.4
57,5°	1.7	0.4	998.8
60,0°	1.4	0.3	999.1
62,5°	1.1	0.3	999.4
65,0°	0.9	0.2	999.6
67,5°	0.7	0.2	999.8
70,0°	0.5	0.1	999.9
72,5°	0.3	0.1	1000.0
75,0°	0.1	0.0	1000.0
77,5°	0.0	0.0	1000.0
80,0°	0.0	0.0	1000.0
82,5°	0.0	0.0	1000.0
85,0°	0.0	0.0	1000.0
87,5°	0.0	0.0	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family Spot 21 Performance	Order number: 51SD33MB11C3B EAN: 4069025538819	LP number 59945_8
--------------------------------------	---	-----------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	12.7	13.7	13.1	14.0	14.3	12.7	13.7	13.1	14.0	14.3
	3H	12.5	13.4	12.9	13.7	14.1	12.5	13.4	12.9	13.7	14.1
	4H	12.4	13.2	12.8	13.5	13.9	12.4	13.2	12.8	13.5	13.9
	6H	12.4	13.0	12.8	13.4	13.8	12.4	13.0	12.8	13.4	13.8
	8H	12.5	12.9	12.9	13.3	13.7	12.5	12.9	12.9	13.3	13.7
	12H	12.4	12.8	12.8	13.2	13.7	12.4	12.8	12.8	13.2	13.7
4H	2H	12.4	13.2	12.8	13.5	13.9	12.4	13.2	12.8	13.5	13.9
	3H	12.2	12.9	12.7	13.3	13.7	12.2	12.9	12.7	13.3	13.7
	4H	12.1	12.7	12.6	13.1	13.5	12.1	12.7	12.6	13.1	13.5
	6H	12.0	12.5	12.5	12.9	13.4	12.0	12.5	12.5	12.9	13.4
	8H	12.0	12.4	12.5	12.8	13.3	12.0	12.4	12.5	12.8	13.3
	12H	11.9	12.2	12.4	12.7	13.2	11.9	12.2	12.4	12.7	13.2
8H	4H	12.0	12.4	12.5	12.8	13.3	12.0	12.4	12.5	12.8	13.3
	6H	11.8	12.1	12.3	12.6	13.1	11.8	12.1	12.3	12.6	13.1
	8H	11.8	12.0	12.3	12.5	13.1	11.8	12.0	12.3	12.5	13.1
	12H	11.7	11.9	12.2	12.4	13.0	11.7	11.9	12.2	12.4	13.0
12H	4H	12.0	12.2	12.4	12.7	13.2	12.0	12.2	12.4	12.7	13.2
	6H	11.8	12.0	12.3	12.5	13.1	11.8	12.0	12.3	12.5	13.1
	8H	11.7	11.9	12.2	12.4	13.0	11.7	11.9	12.2	12.4	13.0


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 82
------------------------	---	---

C-planes	0°
γ	Luminance in cd/m²
45,0°	3340.6
50,0°	2151.2
55,0°	1807.6
60,0°	1613.4
65,0°	1227.3
70,0°	842.1
75,0°	221.7
80,0°	0.0
85,0°	0.0

Photometric test report

Family Spot 21 Performance	Order number: 51SD33MB11C3B EAN: 4069025538819	LP number 59945_8
--------------------------------------	---	-----------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

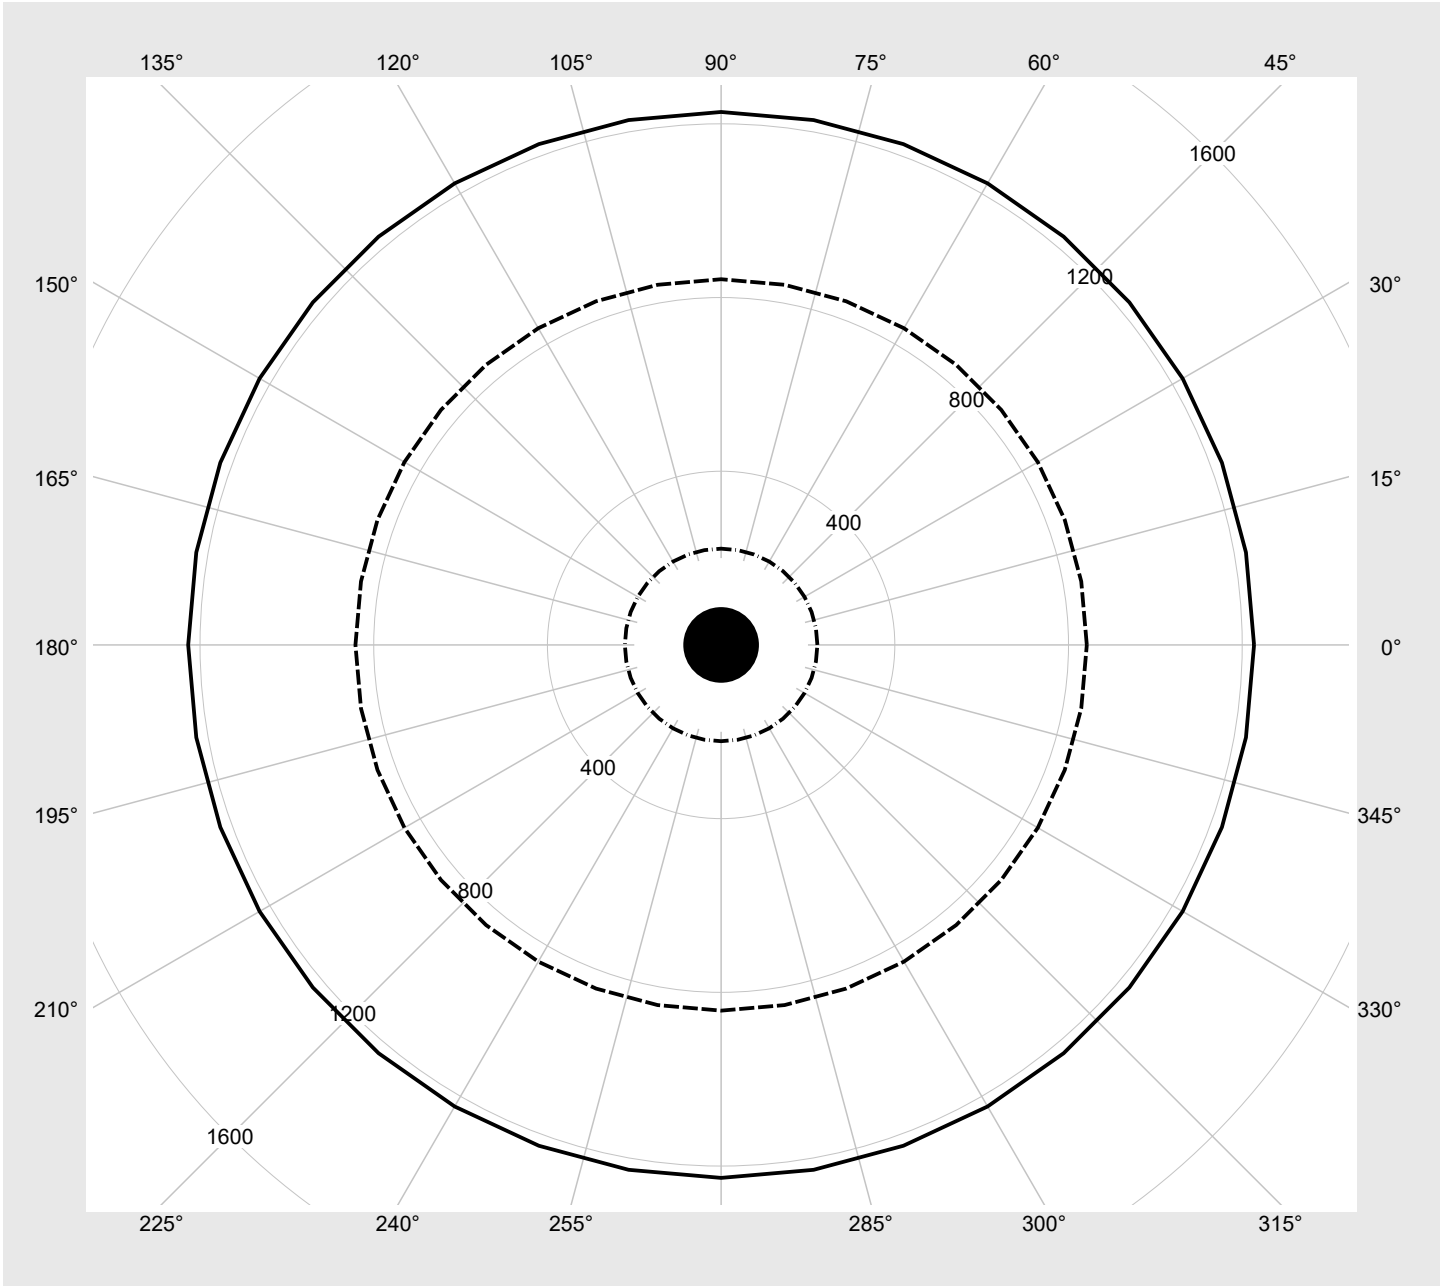

Photometric test report

Family Spot 21 Performance	Order number: 51SD33MB11C3B EAN: 4069025538819	LP number 59945_8
--------------------------------------	---	------------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
0	OFF	OFF	OFF	4150	27.0
1	ON	OFF	OFF	3870	25.0
2	OFF	ON	OFF	3600	23.0
3	ON	ON	OFF	3310	21.0
4	OFF	OFF	ON	3030	19.1
5	ON	OFF	ON	2740	17.1
6	OFF	ON	ON	2440	15.2
7	ON	ON	ON	2150	13.4