


# Photometric test report

<b>Family</b> <b>Spot 21 Standard</b>	<b>Order number: 51SE34MB11C2C</b> <b>EAN: 4069025447647</b>	<b>LP number</b> <b>59934_29</b>
	<b>Version</b> housing, black, reflector, cover glass, transparent, wide distribution <b>Lamps</b> LED 3500 K   CRI ≥ 90 <b>Controlgear</b> ECG Multilumen <b>Setting</b> factory setting: DIP-Step=4 <b>Rated values</b> Net luminous flux = 2800 lm Power consumption = 18.5 W Luminous efficacy = 151.4 lm/W	<b>serial documentation</b> <b>11.05.2026</b>

**Luminous intensity in cd/klm** C180-0 **Imax: 1518 cd/klm**

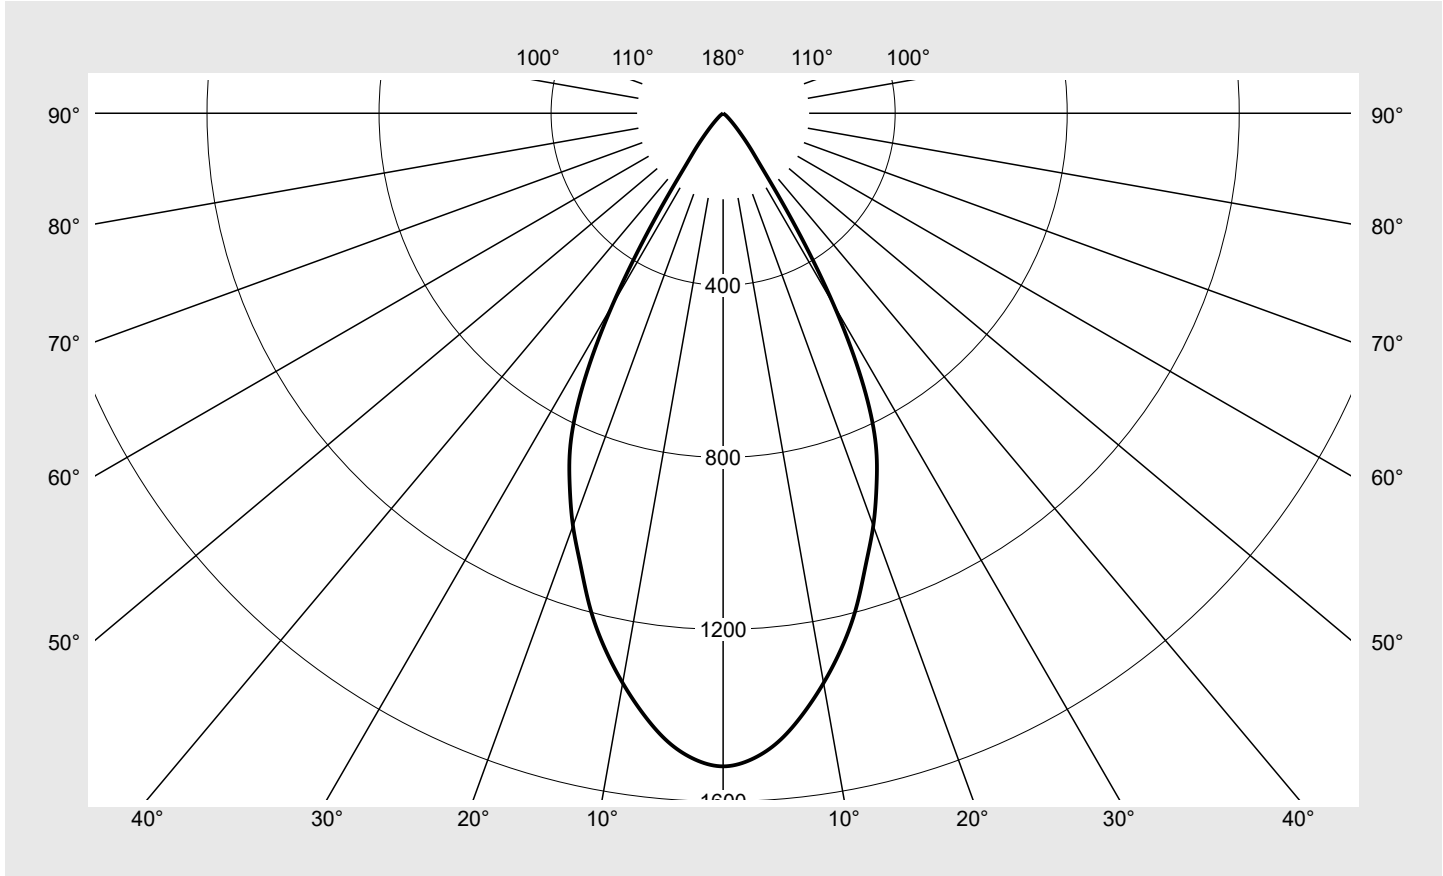

Classifications	
DIN 5040	A 8 0
CIE	N1=98 N2=100 N3=100 N4=100 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	100.0%
$\phi_o$	0.0%

**Measurement conditions**  
DIN EN 13032 and DIN 5032

## Photometric test report

<b>Family</b> Spot 21 Standard	<b>Order number: 51SE34MB11C2C</b> <b>EAN: 4069025447647</b>	<b>LP number</b> 59934_29
-----------------------------------	---	------------------------------

**sit**eco

<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm		Luminous flux in lm/klm
0,0°	1518.5	2.3	2.3
2,5°	1503.9	18.0	20.3
5,0°	1467.3	35.1	55.3
7,5°	1410.8	50.5	105.8
10,0°	1345.0	64.0	169.8
12,5°	1273.2	75.5	245.4
15,0°	1192.8	84.6	330.0
17,5°	1102.1	90.9	420.8
20,0°	1020.8	95.7	516.6
22,5°	932.5	97.8	614.4
25,0°	836.7	96.9	711.3
27,5°	696.4	88.2	799.5
30,0°	514.1	70.5	869.9
32,5°	318.7	46.9	916.9
35,0°	172.5	27.1	944.0
37,5°	109.8	18.3	962.3
40,0°	70.5	12.4	974.8
42,5°	44.6	8.3	983.0
45,0°	28.1	5.4	988.5
47,5°	17.7	3.6	992.0
50,0°	11.6	2.4	994.5
52,5°	7.9	1.7	996.2
55,0°	5.3	1.2	997.4
57,5°	3.6	0.8	998.2
60,0°	2.5	0.6	998.8
62,5°	1.8	0.4	999.3
65,0°	1.2	0.3	999.6
67,5°	0.8	0.2	999.8
70,0°	0.5	0.1	999.9
72,5°	0.3	0.1	1000.0
75,0°	0.1	0.0	1000.0
77,5°	0.0	0.0	1000.0
80,0°	0.0	0.0	1000.0
82,5°	0.0	0.0	1000.0
85,0°	0.0	0.0	1000.0
87,5°	0.0	0.0	1000.0
90,0°	0.0	0.0	1000.0

## Photometric test report

Family Spot 21 Standard	Order number: 51SE34MB11C2C EAN: 4069025447647	LP number 59934_29
----------------------------	---	-----------------------

UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	19.0	20.1	19.3	20.4	20.7	19.0	20.1	19.3	20.4	20.7
	3H	18.8	19.8	19.2	20.1	20.5	18.8	19.8	19.2	20.1	20.5
	4H	18.7	19.6	19.1	20.0	20.3	18.7	19.6	19.1	20.0	20.3
	6H	18.6	19.4	19.1	19.8	20.2	18.6	19.4	19.1	19.8	20.2
	8H	18.8	19.4	19.2	19.7	20.2	18.8	19.4	19.2	19.7	20.2
	12H	18.7	19.3	19.2	19.6	20.1	18.7	19.3	19.2	19.6	20.1
4H	2H	18.7	19.6	19.1	20.0	20.3	18.7	19.6	19.1	20.0	20.3
	3H	18.6	19.3	19.0	19.7	20.1	18.6	19.3	19.0	19.7	20.1
	4H	18.4	19.1	18.9	19.5	19.9	18.4	19.1	18.9	19.5	19.9
	6H	18.3	18.9	18.8	19.3	19.8	18.3	18.9	18.8	19.3	19.8
	8H	18.3	18.8	18.8	19.2	19.7	18.3	18.8	18.8	19.2	19.7
	12H	18.3	18.7	18.8	19.1	19.6	18.3	18.7	18.8	19.1	19.6
8H	4H	18.3	18.8	18.8	19.2	19.7	18.3	18.8	18.8	19.2	19.7
	6H	18.2	18.6	18.7	19.0	19.5	18.2	18.6	18.7	19.0	19.5
	8H	18.1	18.4	18.6	18.9	19.5	18.1	18.4	18.6	18.9	19.5
	12H	18.1	18.3	18.6	18.8	19.4	18.1	18.3	18.6	18.8	19.4
12H	4H	18.3	18.7	18.8	19.1	19.6	18.3	18.7	18.8	19.1	19.6
	6H	18.1	18.4	18.7	18.9	19.5	18.1	18.4	18.7	18.9	19.5
	8H	18.1	18.3	18.6	18.8	19.4	18.1	18.3	18.6	18.8	19.4


<b>Luminance table</b>	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 82
------------------------	---------------------------------	--------------------------------------

C-planes	0°
$\gamma$	Luminance in cd/m <sup>2</sup>
45,0°	21037.6
50,0°	9588.0
55,0°	4909.4
60,0°	2656.3
65,0°	1508.0
70,0°	776.7
75,0°	204.9
80,0°	0.0
85,0°	0.0

**Photometric test report**

<b>Family</b> Spot 21 Standard	<b>Order number: 51SE34MB11C2C</b> <b>EAN: 4069025447647</b>	<b>LP number</b> 59934_29
-----------------------------------	---	------------------------------

**Luminance values in cd/m<sup>2</sup>**      $\gamma$  65°      $\gamma$  70°      $\gamma$  75°      $\gamma$  80°      $\gamma$  85°

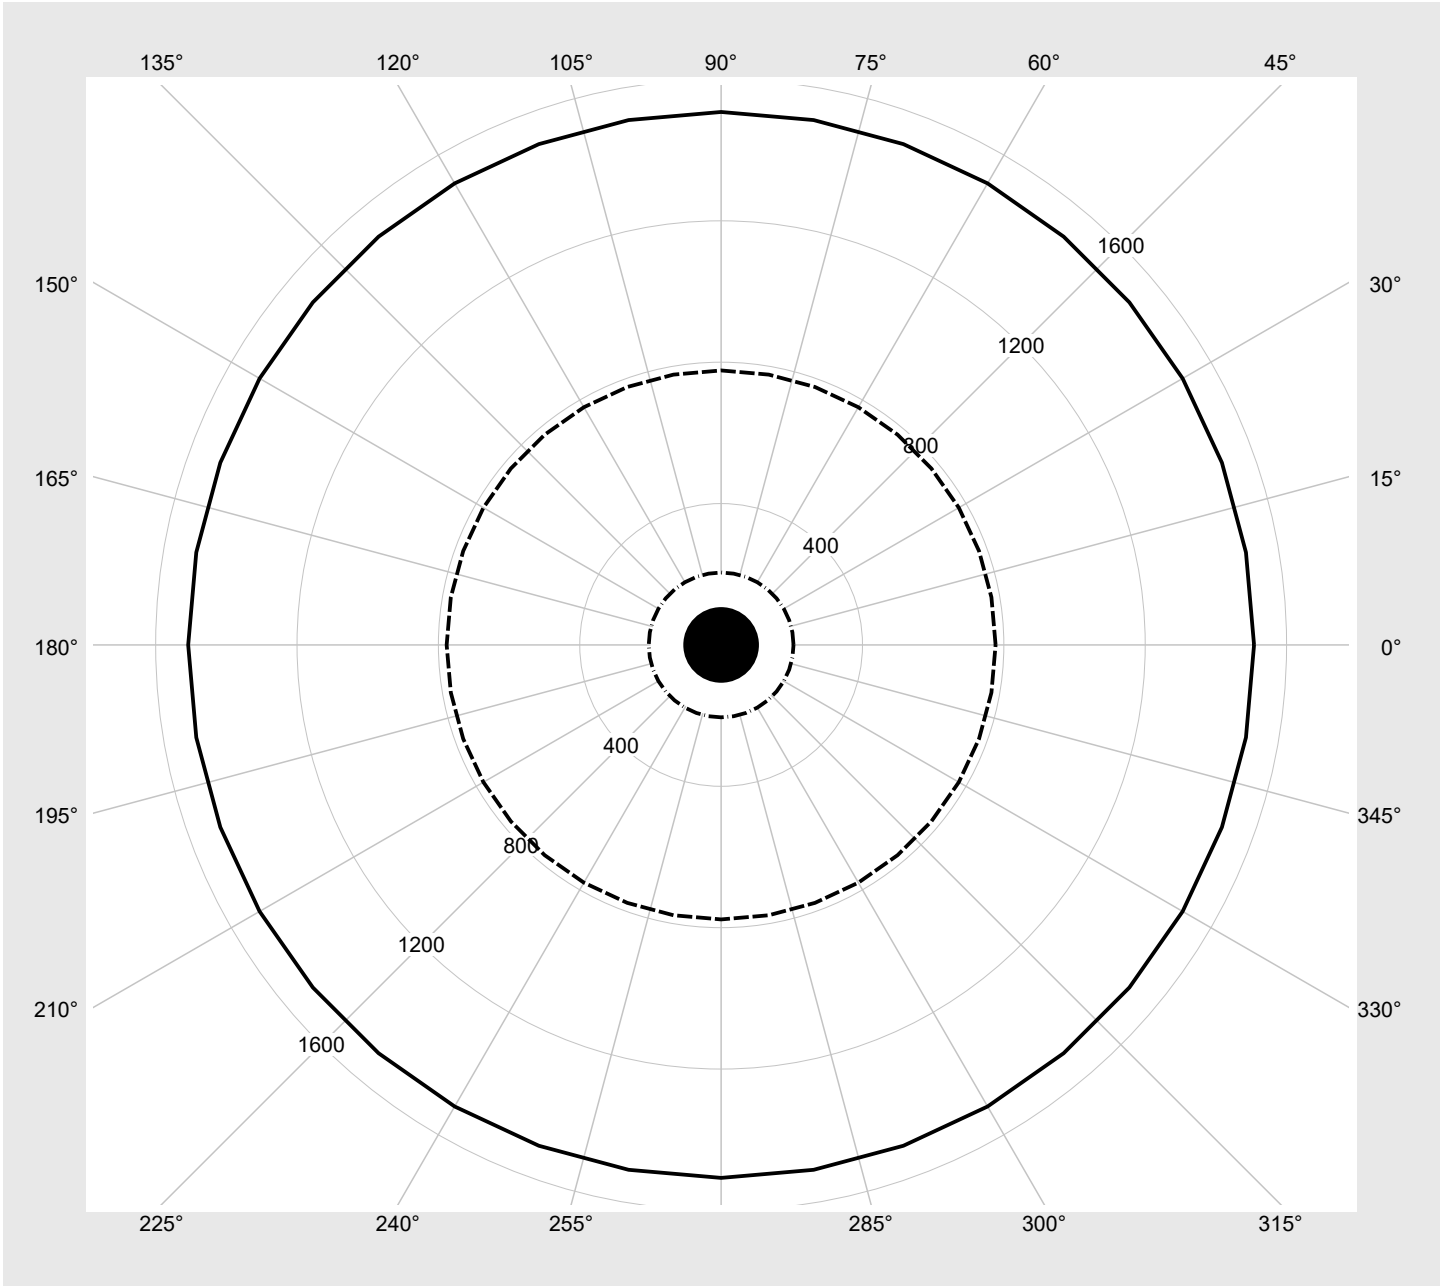

### Photometric test report

Family <b>Spot 21 Standard</b>	Order number: <b>51SE34MB11C2C</b> EAN: <b>4069025447647</b>	LP number <b>59934_29</b>
-----------------------------------	---	------------------------------

<b>Multilumen Table</b>	environmental temperature: 25°C	<b>sITeco</b>
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
0	OFF	OFF	OFF	3770	26.5
1	ON	OFF	OFF	3530	24.5
2	OFF	ON	OFF	3290	22.5
3	ON	ON	OFF	3050	20.5
4	OFF	OFF	ON	2800	18.5
5	ON	OFF	ON	2540	16.6
6	OFF	ON	ON	2280	14.8
7	ON	ON	ON	2010	12.9