

Order No.: 59HL94001ZV00634XX | GTIN (EAN): 4069025012364

Product description: HB11presencedet,PIR-sens,surf



Highbay 11sensor PC8, master, local control, central control, dimmable, installation type: surface-mounted, installation location: to the luminaire, of plastic, protection rating (complete): IP54, certification: CE, voltage: 230V, 1 x PIR movement sensor, 1 x light sensor, 1 x DALI, 1 x Bluetooth® interface, packaging unit: 1 piece

IP 54 CE

Wt. (kg): 0.3
GTIN (EAN): 4069025012364

Order No.: 59HL94001ZV00634XX | GTIN (EAN): 4069025012364

Detailed technical description: HB11presencedet,PIR-sens,surf



Key data

- System family: SITECO Connect 21H wireless
- Product type: presence detector
- Product name: Highbay 11
- Order No.: 59HL94001ZV00634XX

Lighting technology | Lamps | Control gear

Component 1

Operating device:

- Control: Bluetooth® mesh, dimmable

Certificates, Standards

- Protection rating: IP54
- Temperature range (operation): -25..+50°C
- Certification, designation: CE

Material, Colour

- housing: plastic, pure white (RAL 9010)
- Colour specification: pure white (RAL 9010)
- mounting bracket: steel, galvanised

Mounting

- Mounting method, mounting location: surface-mounted, to the luminaire
- Mounting height: 8..14m
- Supplement: only suitable for indoor use

Electrical connection

- Nominal voltage: 230V

Dimensions, Weight

- Length: 83mm
- Width: 83mm
- Height: 28mm
- Weight: 0.3kg

Inputs

1x PIR movement sensor

- Connection: PIR sensor (passive-infrared)
- Detection angle: 360°
- Detection range: D max. 22m
- Feature: circular detection area

1x light sensor

- Option: daylight threshold switching

Outputs

1x DALI


- System current: DALI current 7mA
- Feature: DALI, master function, broadcast addressing, max. 30 DALI ECGs

1x Bluetooth® interface

- Feature: operating frequency 2.4GHz

Order No.: 59HL94001ZV00

Dimensions: HB11presen

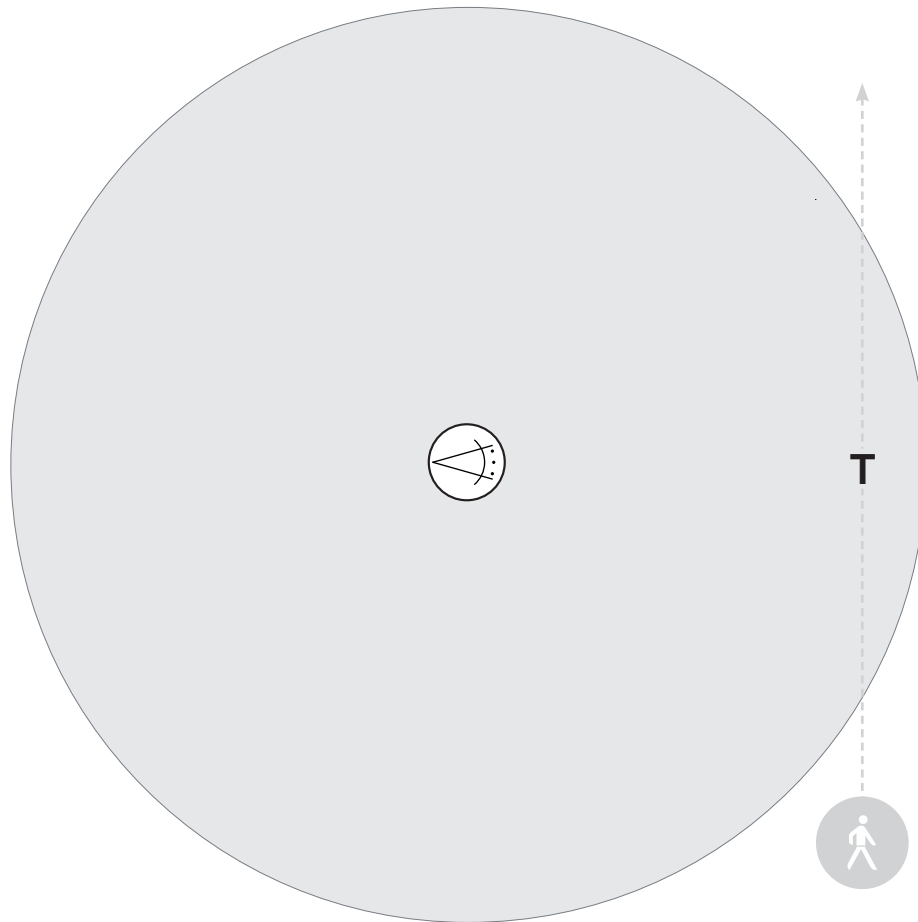

Sensor PC8

Mh	T
14m	ca. 22m