

**Order No.:** 56TL157C4X31 | **GTIN (EAN):** 4058352862582


**Product description:** Lic,Ll,e.wd,320lm740,CEAG,wh



Licross®, luminaire insert, of sheet steel, coil coated, white, length: 500mm, width: 59mm, height: 60mm, mounting height: 2.5..7m, emergency light element, LED rated luminous flux: 320lm, light colour: 740, control gear: CEAG, with plug, 6-pole, with phase selection, mains connection: 220..240V, AC/DC, 0/50..60Hz, rated input power: 3.9W, internal wiring halogen-free, for trunking rail, 9..14-core, for emergency light function, supply monitoring module CEAG, with address switch, choice between two emergency light lines via tool-free moving of contact pin prior to installation in trunking rail, primary light control with lens, of PMMA, primary optical cover: cover, of PMMA, light emission: direct distribution, primary light characteristic: symmetric, for area, compatible with all CEAG STAR technology systems (ZB-S, DG-S (DualGuard-S), LP-STAR, AT-S+), protection rating (complete): IP40, insulation class (complete): insulation class I (protective earthing), certification: CE, UKCA, protection symbol: D if used in an environment without relevant dust loads, impact resistance: IK06, permissible ambient temperature for indoor applications: -20..+40°C, packaging unit: 1 piece

IP 40 IK 06  

Lamps: LED  
Wt. (kg): 0.5  
GTIN (EAN): 4058352862582



**Order No.:** 56TL157C4X31 | **GTIN (EAN):** 4058352862582

**Detailed technical description:** Lic,LI,e.wd,320lm740,CEAG,wh



## Key data

- System family: compatible with all CEAG STAR technology systems (ZB-S, DG-S (DualGuard-S), LP-STAR, AT-S+)
- Product type: luminaire insert
- Product name: Licross®
- Order No.: 56TL157C4X31

## Lighting technology | Lamps | Control gear

### Component 1

#### Lighting technology:

- Light control: lens of PMMA
- Cover: cover
- Beam angle: extremely wide distribution
- Symmetry: symmetric
- Light emission: direct distribution

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 320lm
- Luminous efficacy: 82lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 70
- Light colour: 740
- Rated input power: 3.9W
- Supplement: for emergency light function, internal wiring halogen-free, for trunking rail, 9..14-core, supply monitoring module CEAG, with address switch

#### Operating device:

- Control: CEAG

#### Certificates, Standards

- Protection rating: IP40
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK06
- Protection symbol: D if used in an environment without relevant dust loads
- Temperature range (operation): -20..+40°C
- Certification, designation: CE, UKCA

## Material, Colour

- luminaire module: sheet steel, coil coated, white
- Colour specification: white
- Cover: cover of PMMA

## Mounting

- Mounting method, mounting location: slip-in mounting, in the Licross® trunking rail
- Mounting height: 2.5..7m
- Arrangement: single/continuous arrangement
- Supplement: only suitable for use in indoor areas

## Electrical connection

- Connection: plug, 6-pole, with phase selection
- Nominal voltage: 220..240V, 0/50..60Hz, AC/DC

## Dimensions, Weight


- Length: 500mm
- Width: 59mm
- Height: 60mm
- Weight: 0.5kg

## Service life

- Rated service life: 50000h (L80/B50) at AT = 25°C

**Order No.:** 56TL157C4X31 | **GTIN (EAN):** 4058352862582

**Dimensions:** Lic,LI,e.wd,320lm740,CEAG,wh

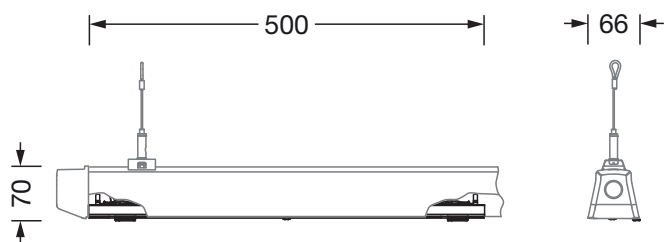

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 11.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -