

**Order No.:** 5XA779728L01GB | **GTIN (EAN):** 4069025145161


**Product description:** FL11mxproRe,RS08857,DMX+RDM,gy



Floodlight FL 11 maxi pro Remote floodlight; light control with lens of PMMA; cover panel of toughened safety glass, transparent; light distribution: RS08, rotationally symmetric direct distribution, LED; colour temperature: 5700K, rated luminous flux: 148.170lm, colour rendering: CRI > 80, light colour: 857; luminous efficacy: 115lm/W; pre-setting: linear dimming characteristic; brightness control: DMX+RDM; with terminal, 8-pole, max. 2.5mm<sup>2</sup>, mains connection: 220..240V/380..400V AC, 50/60Hz, surge voltage resistance: line to ground: 10kV, LED service life up to 100,000h L90. Typical operating time: 1000h per year., ECG replaceable separately, LED unit replaceable without ESD environment, dustproof LED module, dimming range 10..100%; 1285W floodlight with 3x LED unit of diecast aluminium, coated grey; length: 1.003mm / width: 651mm / height: 338mm; mounting bracket, of diecast aluminium, uncoated, natural, equipment: Power, protection rating (complete): IP66; insulation class (complete): insulation class I (protective earthing); certification: CE, ENEC, VDE; ball protection: ball impact resistant, only for outdoor installations in the designated locations, permissible operating ambient temperature: -45..+55°C, permissible storage temperature: -40..+85°C; packaging unit: 1 piece



**Lamps:** LED  
**Wt. (kg):** 30.6  
**GTIN (EAN):** 4069025145161

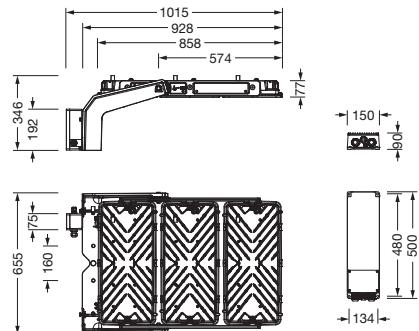

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))  
 Tolerances related to thermal, electrical and photometric data according to IEC 62722  
 Issued 10.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5XA779728L01GB | GTIN (EAN): 4069025145161

**Detailed technical description: FL11mxproRe,RS08857,DMX+RDM,gy**



#### Key data

- Product type: floodlight
- Product name: Floodlight FL 11 maxi pro Remote
- Order No.: 5XA779728L01GB

#### Lighting technology | Lamps | Control gear

#### Component 1

##### Lighting technology:

- Light control: lens of PMMA
- Cover: cover panel, transparent
- Light distribution: RS08
- Symmetry: rotationally symmetric
- Light emission: direct distribution

##### Lamps:

- Lamps: with LED
- Rated values: 148170lm | 1285.1W | 115.3lm/W
- Colour temperature: 5700K
- Colour rendering index: CRI > 80
- Light colour: 857
- Supplement: LED service life up to 100,000h L90. Typical operating time: 1000h per year.

##### Operating device:

- Control: DMX+RDM
- Equipment: pre-setting: linear dimming characteristic

##### Certificates, Standards

- Protection rating: IP66
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): - 45..+55°C
- Supplement: only for outdoor installations in the designated locations
- Certification, designation: CE, ENEC, VDE

#### Material, Colour

- LED unit: diecast aluminium, coated, grey
- Quantity: 3 piece
- Colour specification: grey
- mounting bracket: diecast aluminium, uncoated, natural
- Colour specification: natural
- Cover: cover panel of toughened safety glass

#### Mounting

- Mounting method, mounting location: surface-mounted, to supporting structure, to the ceiling, to the cross arm
- Arrangement: single arrangement
- Supplement: with mounting bracket

#### Electrical connection

- Connection: terminal, 8-pole, max. 2.5mm<sup>2</sup>
- Nominal voltage: 220..240V/380..400V, 50/60Hz, AC
- Surge voltage resistance: line to ground: 10kV

#### Dimensions, Weight

- Length: 1003mm
- Width: 651mm
- Height: 338mm
- Weight: 30.6kg

#### Light emission


- Light emission: 0%

#### Place of operation

- Suitable for: Bangladesh, India, Saudi Arabia, United Arab Emirates

**Order No.:** 5XA779728L01GB | **GTIN (EAN):** 4069025145161

**Dimensions:** FL11mxproRe,RS08857,DMX+RDM,gy

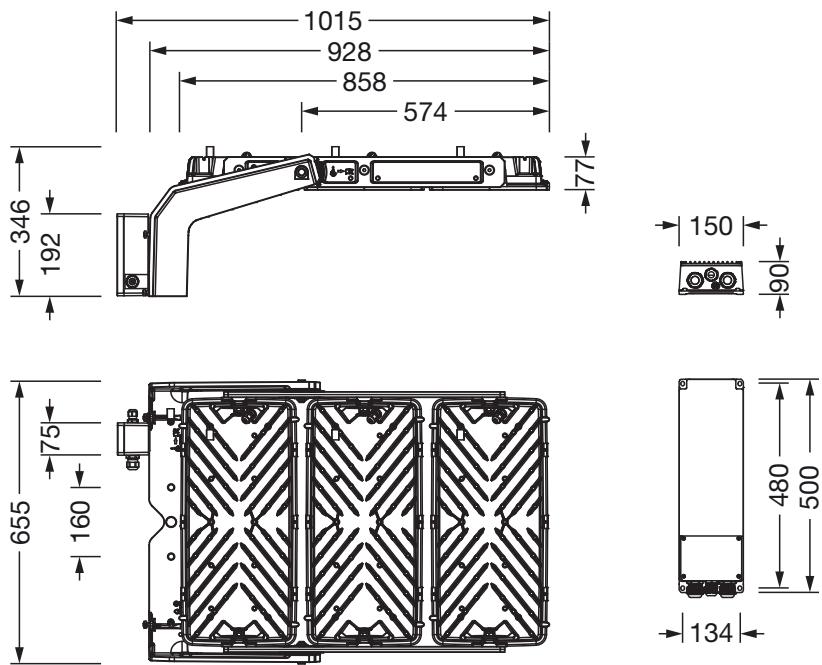

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))  
 Tolerances related to thermal, electrical and photometric data according to IEC 62722  
 Issued 10.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -