

**Order No.:** 52HN11DB5LDA | **GTIN (EAN):** 4069025445230


**Product description:** HB21mx,nrrw,27240lm850,DA2,f.c-bat



high bay luminaire Highbay 21 maxi; direct symmetric narrow distribution, light control with lens of PMMA;  $UGR \leq 19$  ( $X = 4H$  |  $Y = 8H$  |  $S = 0.25H$  | reflection values 70/50/20); luminous flux: 27.240lm; light colour: 850, colour temperature: 5000K, MacAdam  $\leq 3$  SDCM (initial), colour rendering: CRI > 80; luminous efficacy: 189,2lm/W; rated service life: 75.000h (L80/B50) at  $AT = t_a$  max; control: DALI 2; luminaire connection: terminal, 5-pole, max. 2.5mm<sup>2</sup> (cable entry for one cable,  $\varnothing$  8.5..16mm); mains connection: 230..240V, AC/DC 0/50..60Hz; connected load: 144W; protection rating (complete): IP66; insulation class (complete): insulation class I (protective earthing); protection symbol: D; impact resistance: IK08; certification: CE, ENEC, VDE, UKCA; luminaire for central battery installations according to DIN EN 60598-2-22, internal wiring halogen-free; luminaire corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry; LABS conformity tested according to VDMA 24364:2018-05; housing frame of high-performance plastic PA6, matt traffic white (RAL 9016); cover of PMMA; dimension (LxWxH): 946 x 442 x 72mm; permissible operating ambient temperature: -40..+65°C (reducing of maximum allowable ambient temperature of 5°C with ceiling mounting); packaging unit: 1 piece; (delivery without accessories; please order mounting accessories separately)



Lamps:	LED
Wt. (kg):	7.1
GTIN (EAN):	4069025445230

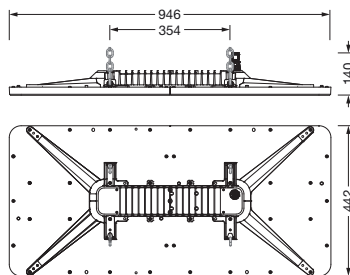

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.05.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 52HN11DB5LDA | **GTIN (EAN):** 4069025445230

**Detailed technical description:** HB21mx,nrrw,27240lm850,DA2,f.c-bat



## Key data

- Product type: high bay luminaire
- Product name: Highbay 21 maxi
- Order No.: 52HN11DB5LDA

## Lighting technology | Lamps | Control gear

### Component 1

#### Lighting technology:

- Light control: lens of PMMA
- Cover: cover
- Beam angle: narrow distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis:  $\leq 19$
- UGR viewing direction along lateral luminaire axis:  $\leq 19$

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 27240lm
- Luminous efficacy: 189lm/W
- Colour temperature: 5000K
- Colour rendering index: CRI  $> 80$
- Light colour: 850
- SDCM (Standard Deviation of Colour Matching): MacAdam  $\leq 3$  SDCM (initial)
- Rated input power: 144W
- Supplement: internal wiring halogen-free

#### Operating device:

- Switching method: for central battery installations according to DIN EN 60598-2-22

### Component 2

## Certificates, Standards

- Protection rating: IP66
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK08
- Protection symbol: D
- Temperature range (operation): -40...+65°C
- Supplement: corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, LABS conformity tested according to VDMA 24364:2018-05
- Standard: EN 60598-2-22
- Certification, designation: CE, ENEC, VDE, UKCA

## Material, Colour

- housing frame: high-performance plastic PA6, matt traffic white (RAL 9016)
- Colour specification: matt traffic white (RAL 9016)
- Cover: cover of PMMA

## Mounting

- Mounting method, mounting location: suspended mounting, surface-mounted, to wire, to the ceiling, to the wall, to the chain
- Arrangement: single arrangement

## Electrical connection

- Connection: terminal, 5-pole, max. 2.5mm<sup>2</sup>
- Nominal voltage: 230...240V, 0/50...60Hz, AC/DC

## Dimensions, Weight


- Length: 946mm
- Width: 442mm
- Height: 72mm
- Weight: 7.1kg

## Service life

- Rated service life: 75000h (L80/B50) at AT = ta max

**Order No.:** 52HN11DB5LDA | **GTIN (EAN):** 4069025445230

**Dimensions:** HB21mx,nrrw,27240lm850,DA2,f.c-bat

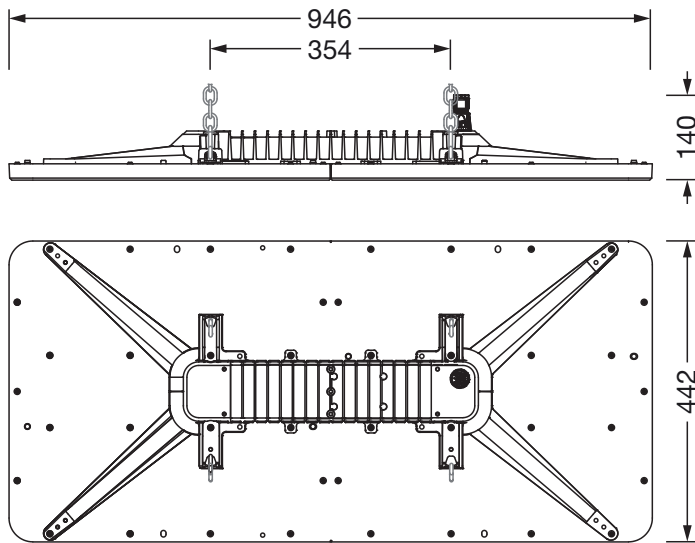

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.05.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -