


Order No.: 51TM16DN695G | **GTIN (EAN):** 4069025718013


Product description: Lic11Pe,wd,9780lm865,DA2,IP40,L1500,wh



Licross 11 Performance MO, luminaire insert, of sheet steel, galvanised, coil coated, white, length: 1.500mm, width: 120mm, height: 123mm, LED rated luminous flux: 9.780lm, light colour: 865, SDCM (Standard Deviation of Colour Matching)MacAdam ≤ 2 SDCM (initial), control gear: DALI 2, with plug, 5-pole, with phase selection, mains connection: 220..240V, AC, 50/60Hz, rated input power: 57W, internal wiring halogen-free, primary light control with lens, of plastic, primary optical cover: cover, of PMMA, light emission: direct/indirect distribution, primary light characteristic: symmetric, protection rating (complete): IP40, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, UKCA, protection symbol: D if used in an environment without relevant dust loads with corresponding accessories, impact resistance: IK06, permissible ambient temperature for indoor applications: $-25..+35^{\circ}\text{C}$, LABS conformity tested according to VDMA 24364:2018-05, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, The light source and the operating device comply with the requirements of the Ecodesign Regulation (EU) 2019/2020 and are replaceable in accordance with this regulation, packaging unit: 1 piece



Lamps: LED
 Wt. (kg): 3.1
 GTIN (EAN): 4069025718013

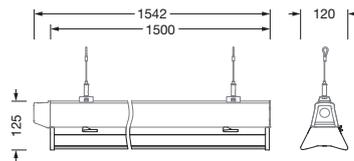

Order No.: 51TM16DN695G | **GTIN (EAN):** 4069025718013

Detailed technical description: Lic11Pe,wd,9780lm865,DA2,IP40,L1500,wh



Key data

- Product type: luminaire insert
- Product name: Licross 11 Performance MO
- Order No.: 51TM16DN695G

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Light control: lens of plastic
- Cover: cover
- Beam angle: wide distribution
- Symmetry: symmetric
- Light emission: direct/indirect distribution, 80:20
- UGR viewing direction along longitudinal luminaire axis: ≤ 19
- UGR viewing direction along lateral luminaire axis: ≤ 22

Lamps:

- Lamps: with LED
- Rated luminous flux: 9780lm
- Luminous efficacy: 172lm/W
- Colour temperature: 6500K
- Colour rendering index: CRI > 80
- Light colour: 865
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 2 SDCM (initial)
- Rated input power: 57W
- Supplement: internal wiring halogen-free

Operating device:

- Control: DALI 2

Certificates, Standards

- Protection rating: IP40
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK06
- Protection symbol: D if used in an environment without relevant dust loads with corresponding accessories
- Temperature range (operation): -25..+35°C
- Supplement: corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, LABS conformity tested according to VDMA 24364:2018-05
- Certification, designation: CE, ENEC, VDE, UKCA

Material, Colour

- Licross LED insert: sheet steel, galvanised, coil coated, white
- Cover: cover of PMMA

Mounting

- Mounting method, mounting location: slip-in mounting, in the Licross trunking rail
- Arrangement: single/continuous arrangement
- Supplement: only suitable for use in indoor areas

Electrical connection

- Connection: plug, 5-pole, with phase selection
- Nominal voltage: 220..240V, 50/60Hz, AC

Dimensions, Weight

- Length: 1500mm
- Width: 120mm
- Height: 123mm
- Weight: 3.1kg

Service life

- Rated service life: 100000h (L90) at AT = ta max, 100000h (L95) at AT = 25°C

Order No.: 51TM16DN695G | GTIN (EAN): 4069025718013

Dimensions: Lic11Pe,wd,9780lm865,DA2,IP40,L1500,wh

